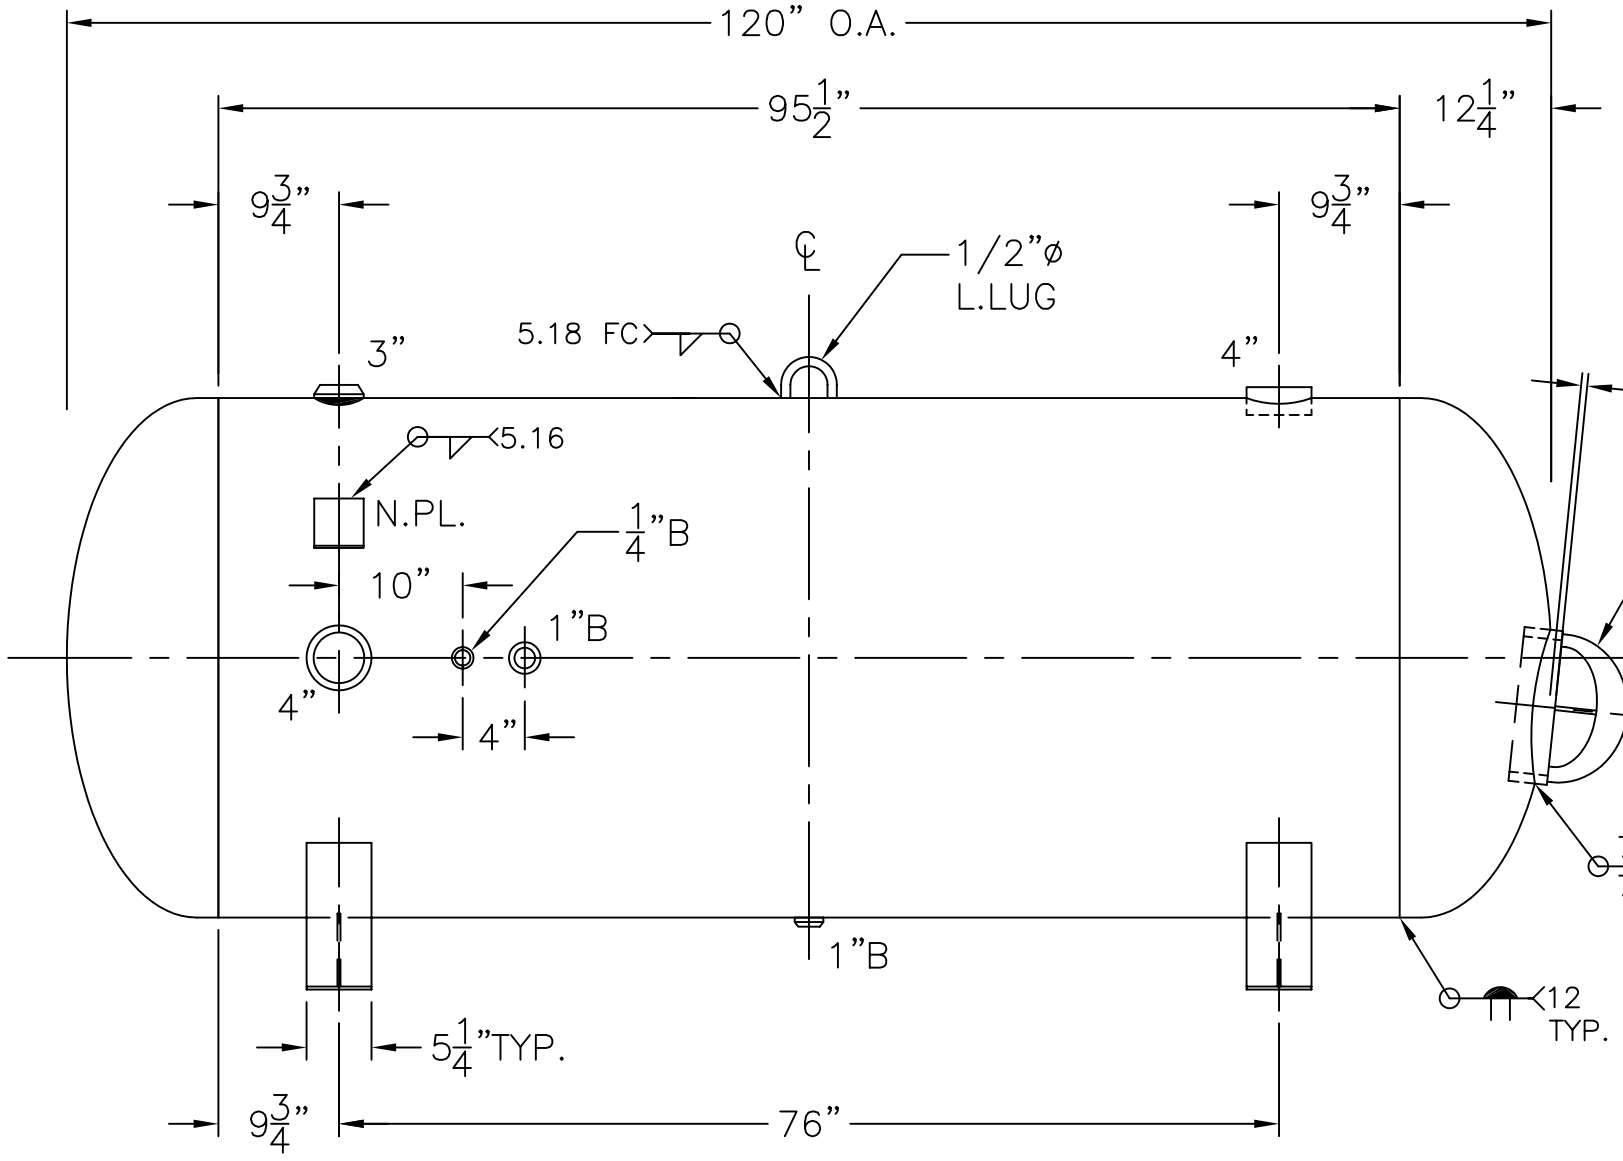

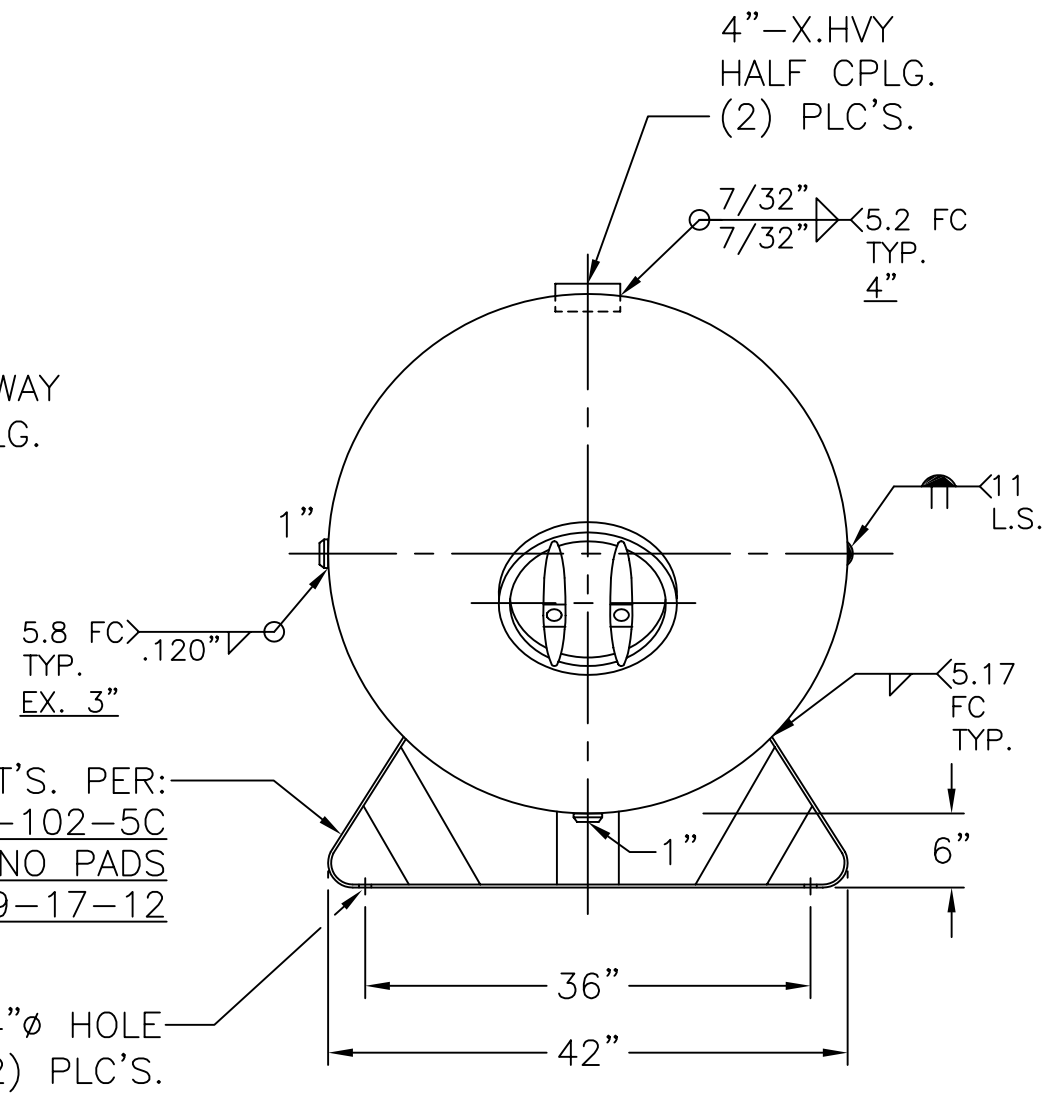

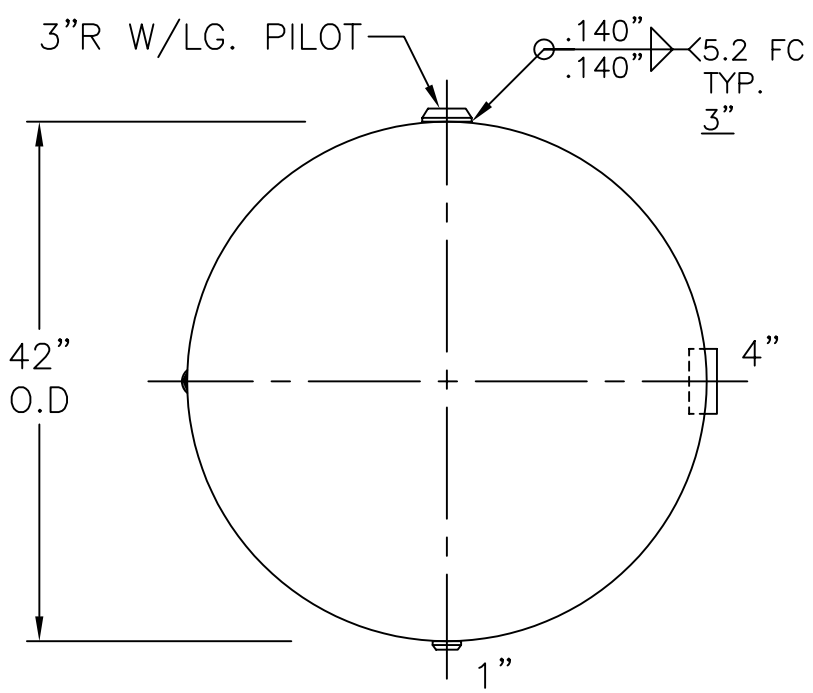

VIEW W/OUT SUPT'S

NOTE: 1) HYDRO @ 163 PSIG. MIN.

SHELL / HEADS	.205" SA–455 2:1 S.E.
	JOGGLED – .189" OFFSET
	.218" SA–455
M.A.W.P.	125 PSIG. @ 400 °F
M.D.M.T.	–20 °F @ 125 PSIG.
ASME. SECTION VIII	DIV. 1, 2010 ADD. 2011
X–RAY:	RT–NO
GALLONS:	660 WT. 1244 LBS.
SERIAL NO.	
N.B.	

42–HG–660–W	REV. 9–17–12
	DATE: 7–30–80
FOR: HANSON STANDARD	
HORIZ. AIR TANK	
SURFACE AREA = 117.3 SQ. FT.	
INSIDE: UNPAINTED	
OUTSIDE: PRIME	
CAD–"B" UNDER "STD"–SERIES	
BY: E.S.	SCALE: 3/4"=12"

ROY E. HANSON JR. MFG.
1600 E. WASHINGTON BLVD.
LOS ANGELES, CA 90021