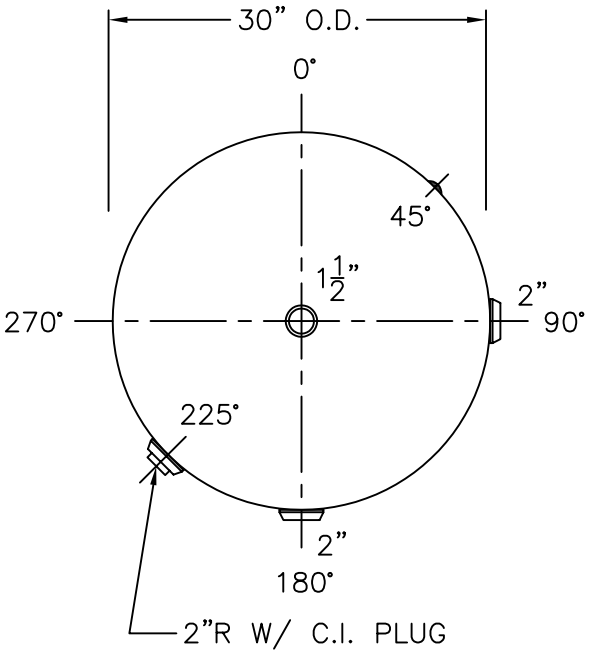

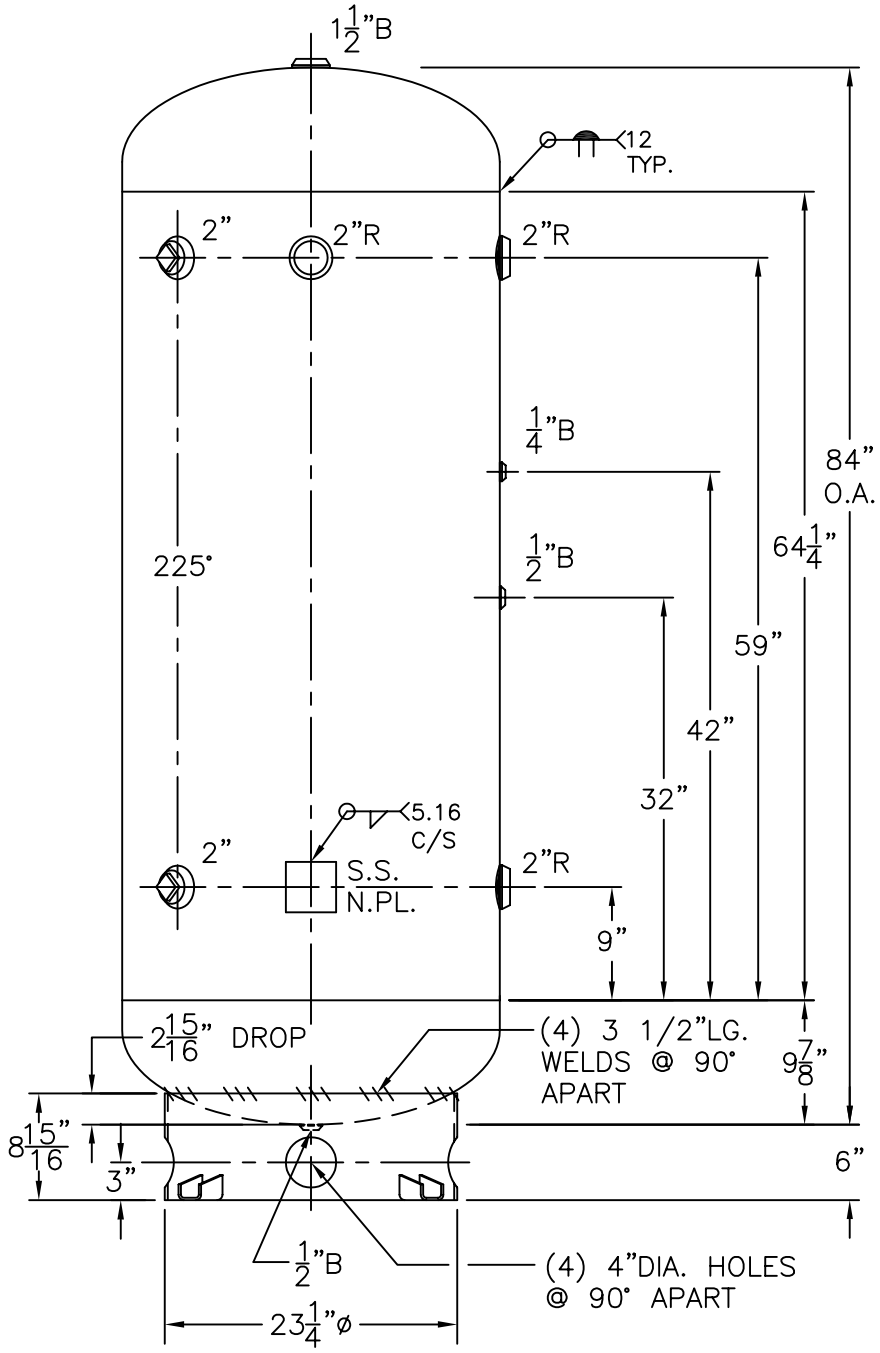

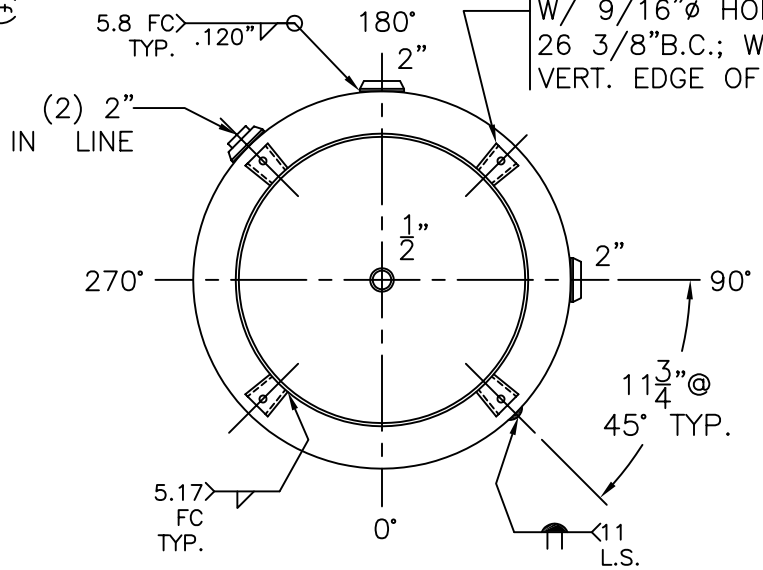

NOTE: 1) HYDRO @ 390 PSIG. MIN.
2) IMPACT TESTED? NO UG-20(f)
3) CRN - K5970.1

SHELL / HEADS	
JOGGLE	.252" SA-455 2:1 S.E.
.250" SA-455	
M.A.W.P. 300 PSIG. @ 400 °F	
M.D.M.T. -20 °F @ 300 PSIG.	
ASME. SECTION VIII DIV. 1, 2013	
X-RAY: RT-4 SPOT L.S. ONLY	
GALLONS: 240	WT. 679 LBS.
SERIAL NO.	
N.B.	

30-VD-240-R	REV. 12-10-13
FOR: HANSON STANDARD	DATE: 12-2-86
VERT. AIR TANK	
SURFACE AREA = 58.7 SQ. FT.	
INSIDE: UNPAINTED	
OUTSIDE: PRIME	
BY: E.S.	SCALE: 3/4"=12"

ROY E. HANSON JR. MFG.
1600 E. WASHINGTON BLVD.
LOS ANGELES, CA 90021