


6"-300# R.F.S.O.
 FLG. W/ SCH. 120
 SA-106-B
 PIPE x 7 5/8" LG.
 (2) PLC'S.

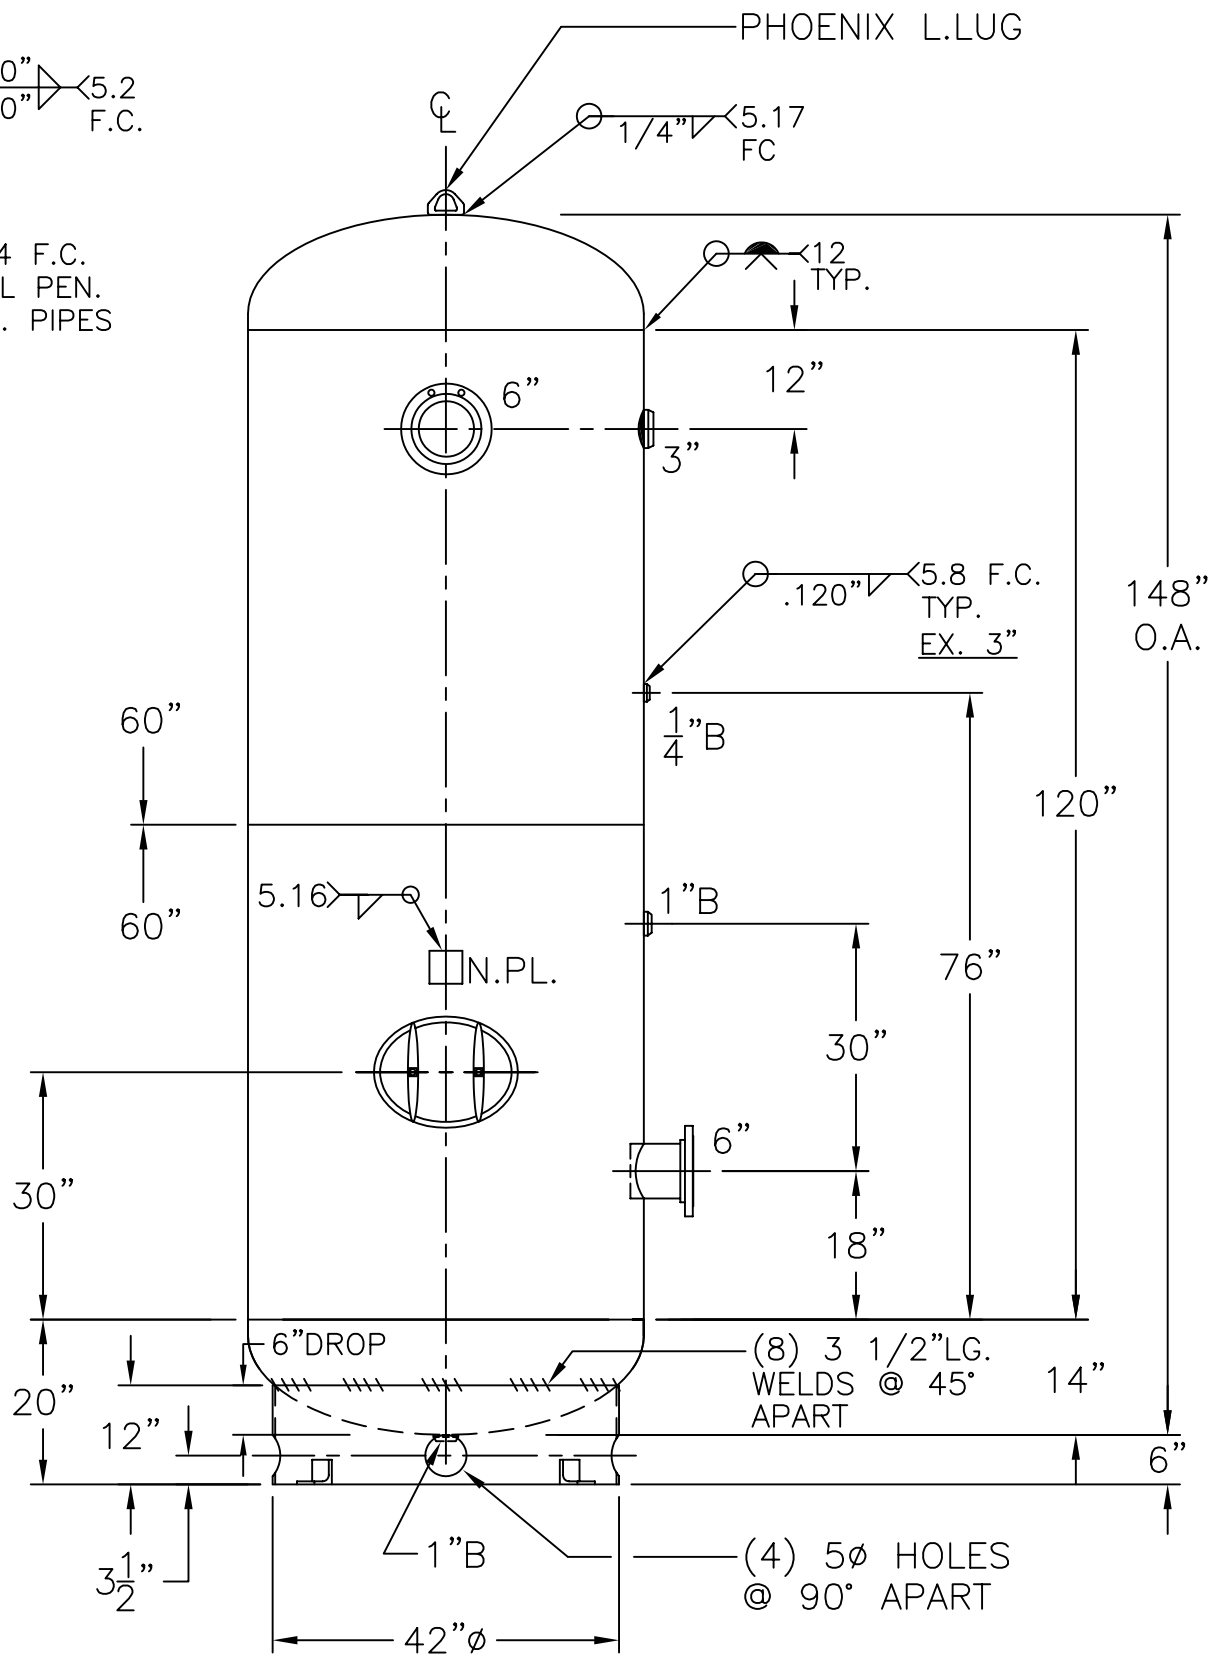

NOTE: 1) HYDRO @ 390 PSIG. MIN.

SHELL / HEADS		.358" MIN. SA-516-70 2:1 S.E.
M.A.W.P.	300 PSIG. @ 400 °F	
M.D.M.T.	-20 °F @ 300 PSIG.	
ASME SECTION VIII	DIV. 1, 2010 ADD 2010	
X-RAY: RT-2	100% L.S. & SPOT ALL G.S.	
GALLONS:	1060	WT. 2823 LBS.
SERIAL NO.		
N.B.		

48-VD-1060-R	REV. 8-8-11
FOR: HANSON STANDARD	DATE: 12-2-98
VERT. AIR TANK	
UW-21(b)	
INSIDE: UNPAINTED	
OUTSIDE: PRIME	
CAD-"B" UNDER "STD"-SERIES	
BY: J.G.	SCALE: 1/2"=12"
ROY E. HANSON JR. MFG.	
1600 E. WASHINGTON BLVD.	
LOS ANGELES, CA 90021	

