


VIEW W/OUT TOP SUPT'S

3"R W/LG. PILOT  
(3) PLC'S  
2" B. W/STL. PLUG  
INSPECTION OPENING  
(2) PLC'S

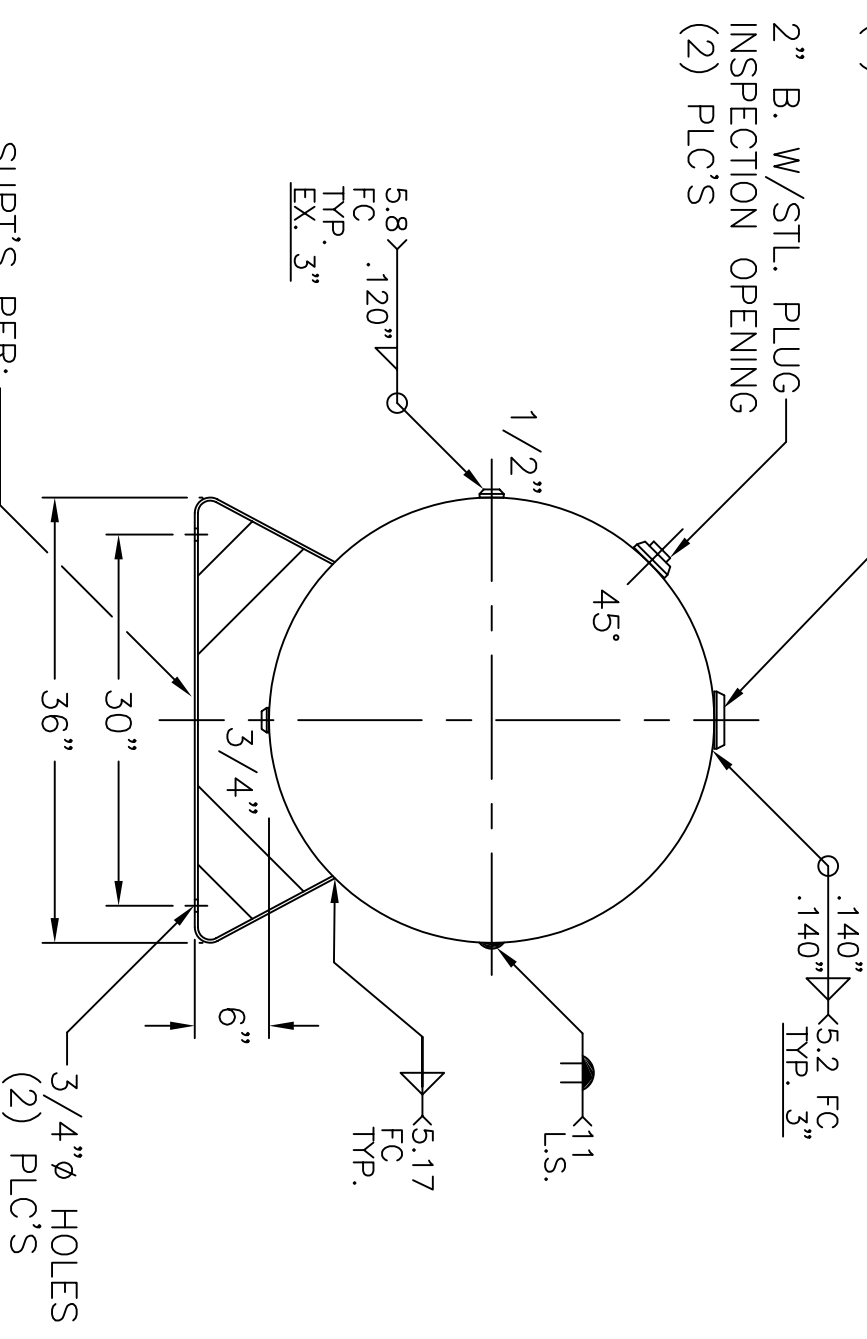

SUPT'S PER:  
MA-102-4-C  
NO PADS

NOTE: 1) HYDRO @ 390 PSIG. MIN.

SHELL / HEADS		.3125" SA-455 2:1 S.E. (.293"MIN.) TRIM	
.317" SA-455 (.295"MIN.)			
M.A.W.P.	300 PSIG. @ 400 °F	36-HD-500-W	
M.D.M.T.	-20 °F @ 300 PSIG.	REV.	11-11-09
ASME SECTION VIII	DIV. 1, 2007 ADD 2008	DATE:	3-18-91
X-RAY:	RT-4 SPOT L.S. ONLY	FOR: HANSON STANDARD	
GALLONS:	500 WT. 1357 LBS.	HORIZ. AIR TANK	
SERIAL NO.		INSIDE: UNPAINTED	
		OUTSIDE: PRIME	
		CAD-"B" SIZE UNDER "STD"-SERIES	
		BY: J.G. SCALE: 3/4"=12"	
		<b>ROY E. HANSON JR. MFG.</b>	
		1600 E. WASHINGTON BLVD.	
		LOS ANGELES, CA 90021	