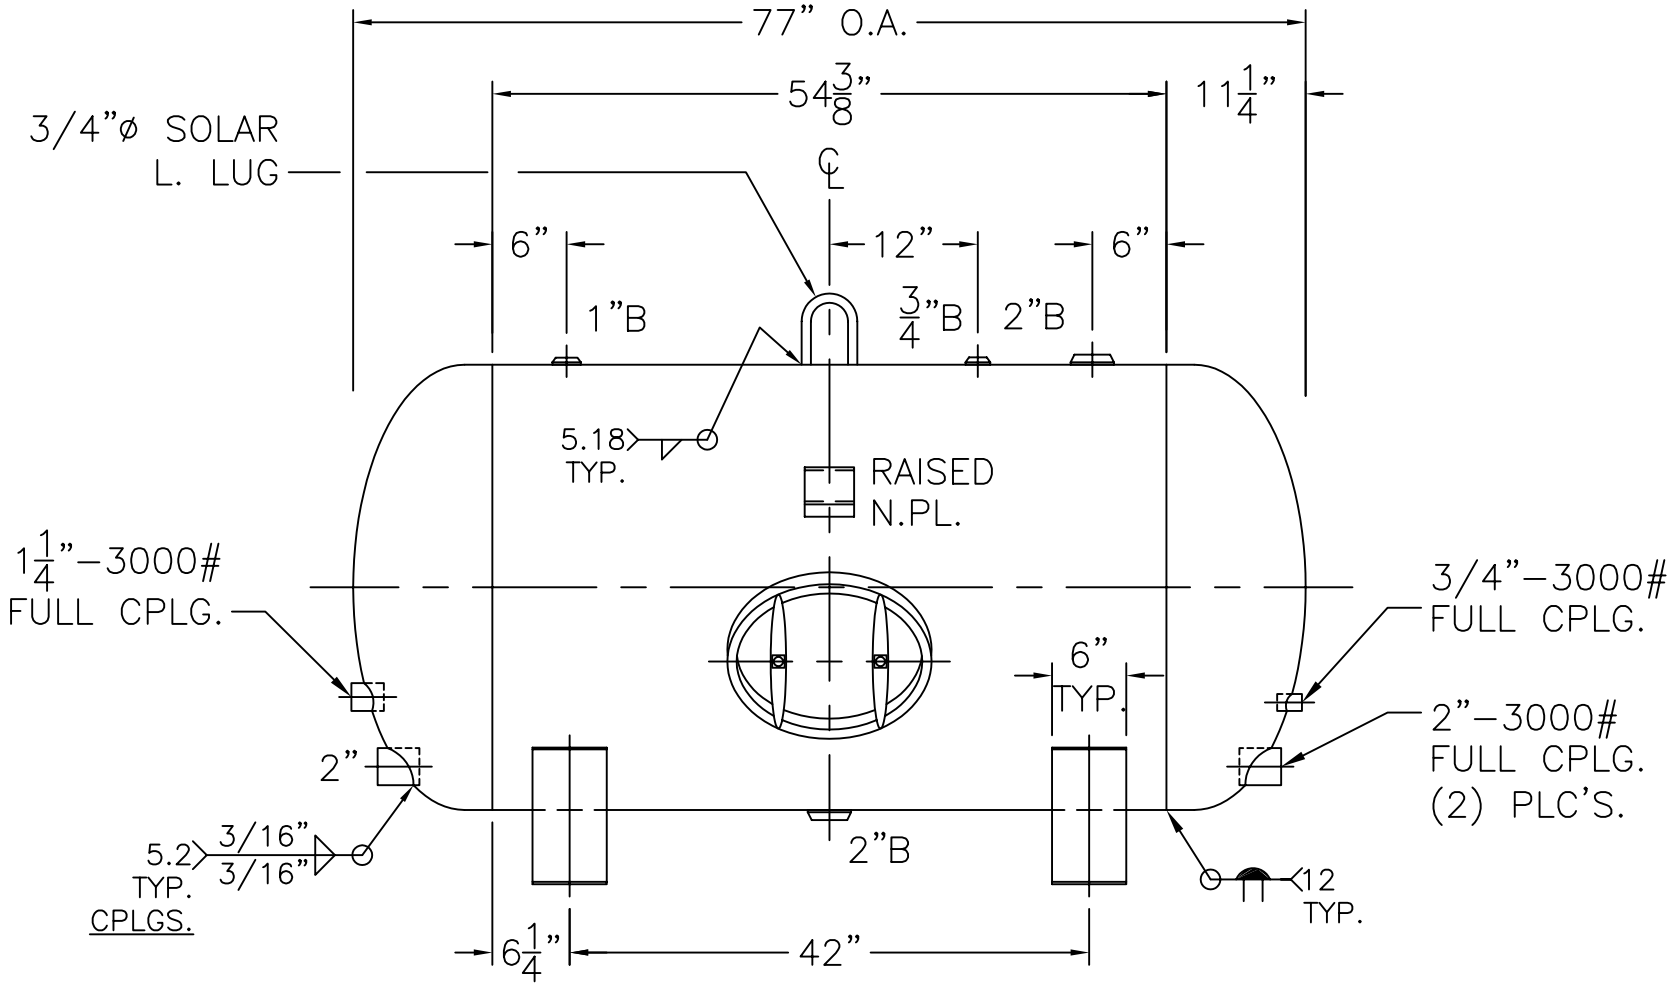

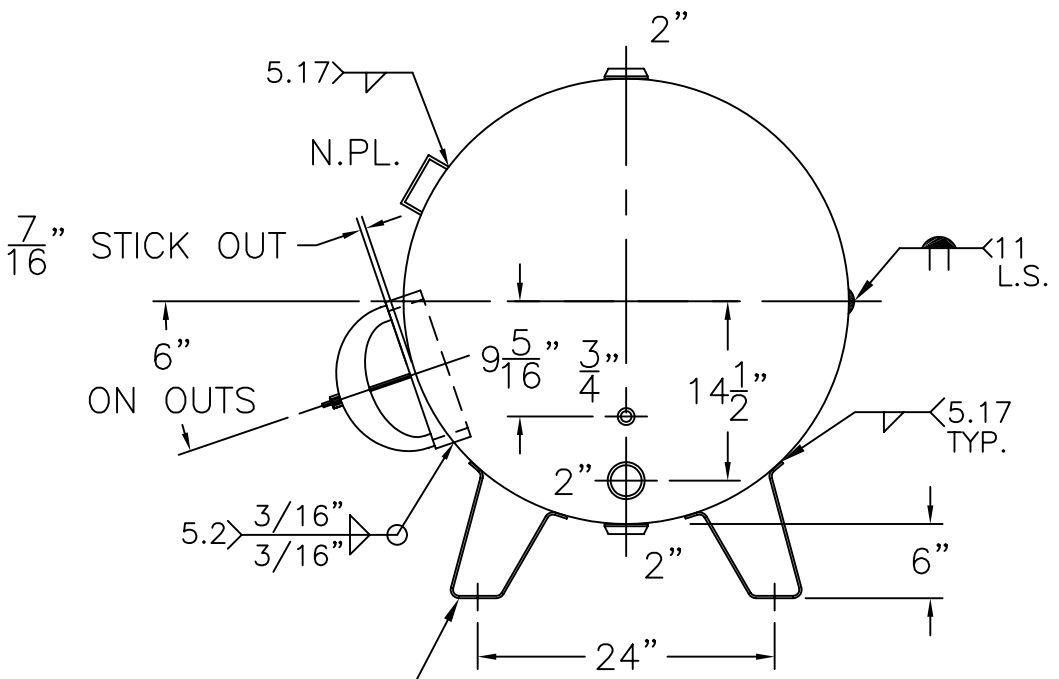

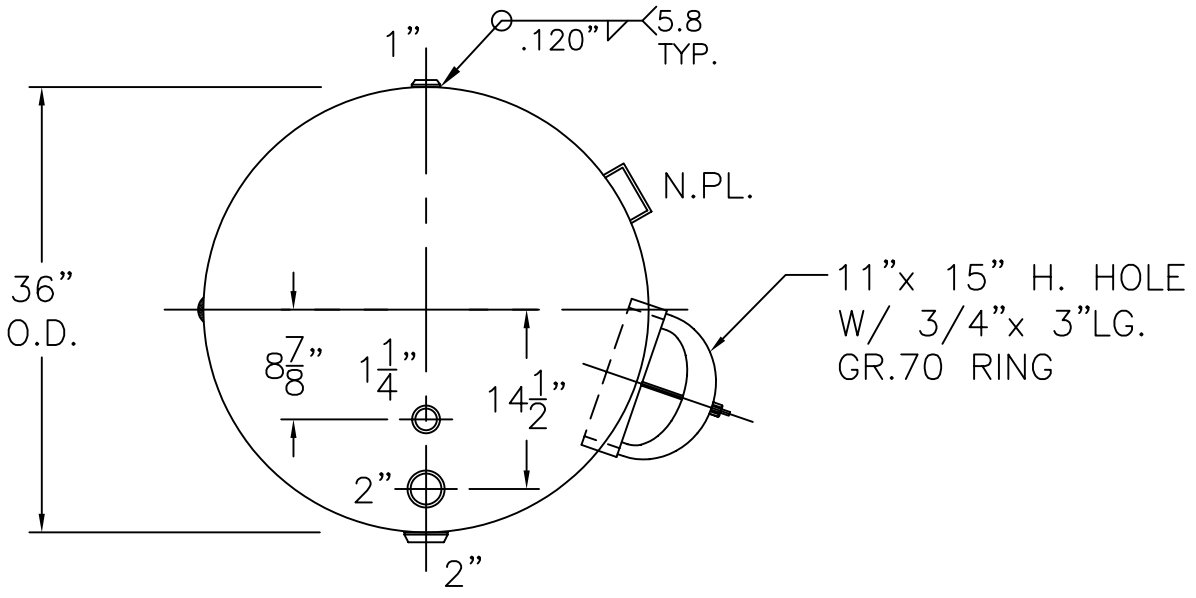

END VIEW W/OUT SUPPORTS

2) 4–1–04 PROOF TEST.

NOTE: 1) HYDRO @ 240 PSIG. MIN.

SHELL / HEADS	.182" SA–455 2:1 S.E.
	JOGGLE – .149" OFFSET
	.164" SA–414–G
M.A.W.P. 160 PSIG. @ 180 °F	
ASME SECTION Ⅳ 2007 ADD. 2009	
X–RAY: RT–NO / H.L.W.	
GALLONS: 305	WT. 606 LBS.
SERIAL NO.	

ES–36–305–H	REV. 10–20–10
	DATE: 10–24–89
FOR: HANSON STANDARD	
HORIZ. HOT WATER TANK	
SURFACE AREA = 65.1 SQ. FT.	
INSIDE: EPOXY LINED	
OUTSIDE: PRIME	
CAD–"B" UNDER "STD"–SERIES	
BY: E.S.	SCALE: 3/4"=12"

ROY E. HANSON JR. MFG.
1600 E. WASHINGTON BLVD.
LOS ANGELES, CA 90021