JOB No.	
DATE:	

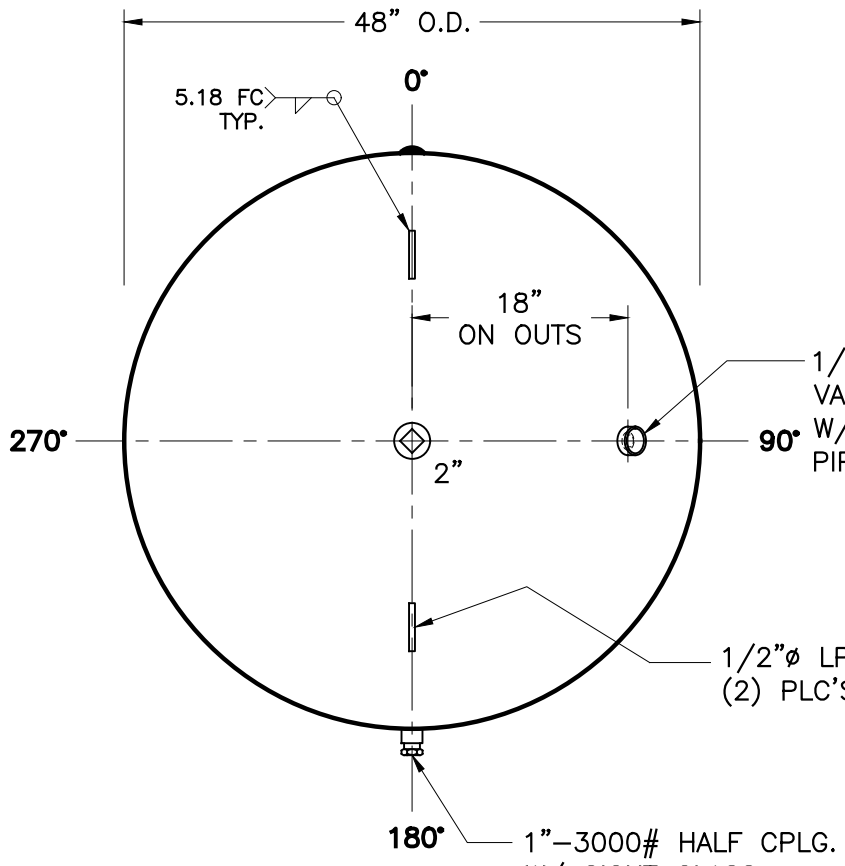

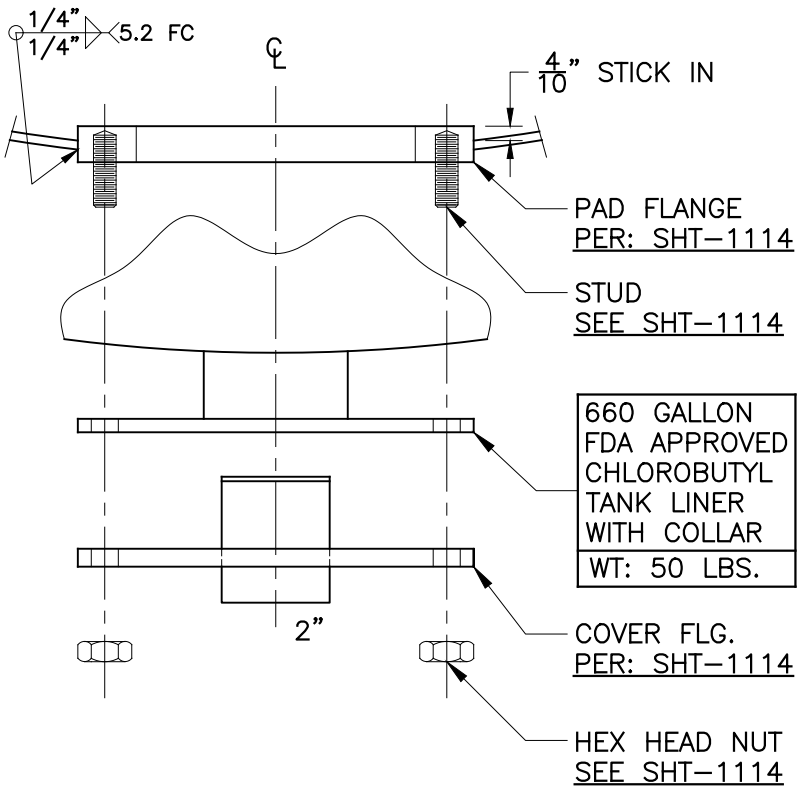

COVER ASSEMBLY DTL.

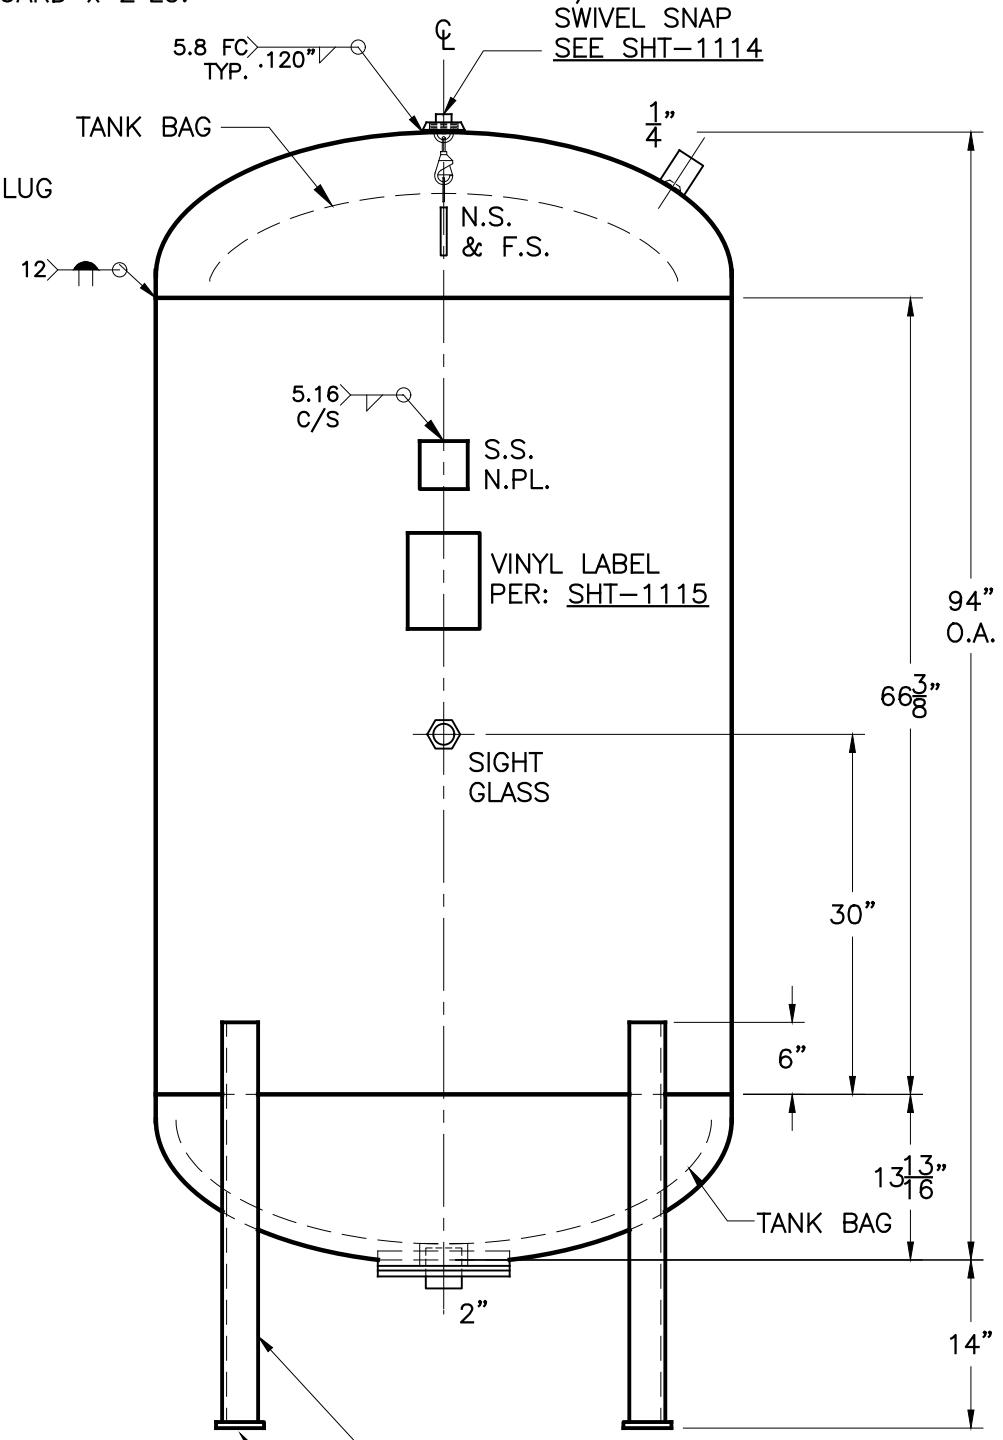

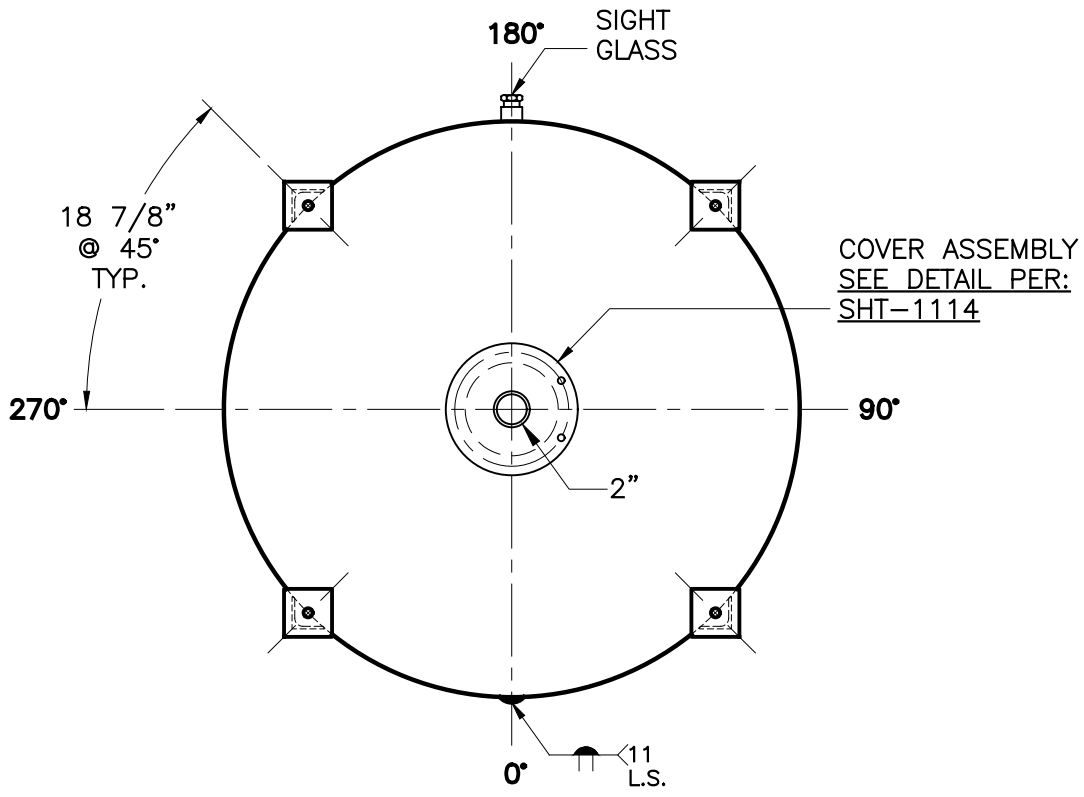

NOTE: 1) HYDRO @ 163 PSIG. MIN.
2) FOR NON CORROSIVE SERVICE–BLADDER TANK.

SHELL / HEADS											
.250" SA–455 2:1 S.E.											
JOGGLE											
.205" SA–455											
M.A.W.P. 125 PSIG. @ 240 °F											
M.D.M.T. 32 °F @ 125 PSIG.											
ASME. SECTION VIII DIV. 1, 2017											
X–RAY: RT–NO											
GALLONS: 660	WT. 1258 LBS.										
SERIAL NO.											
N.B.											

BB–660–L	REV. 6–7–19
	DATE: 4–1–05
HANSON STANDARD	
VERT. BLADDER TANK	
SURFACE AREA = 108.0 SQ. FT.	
INSIDE: UNPAINTED	
OUTSIDE: PRIMER	
LEG–ZONE 4–15 KM.	
BY: J.A.	SCALE: 3/4"=12"

ROY E. HANSON JR. MFG.
LOS ANGELES, CA 90021