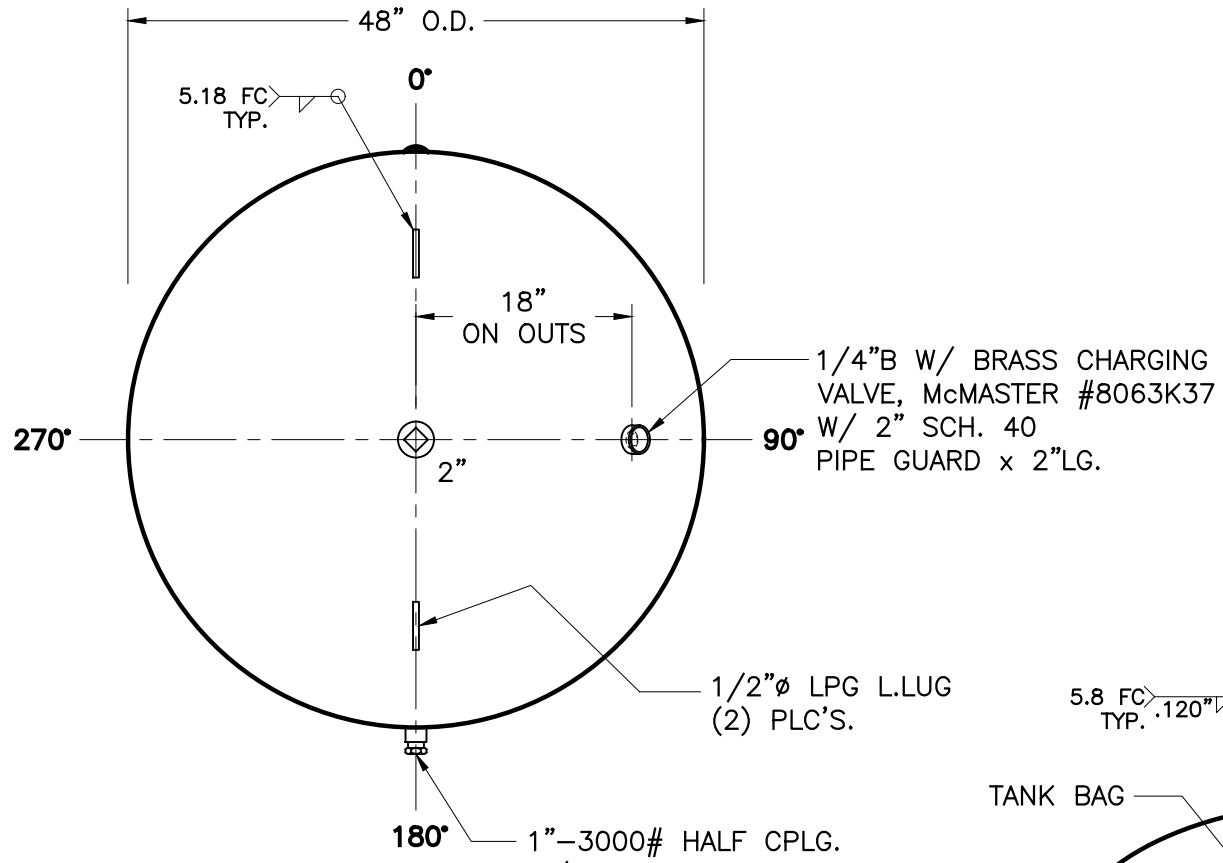

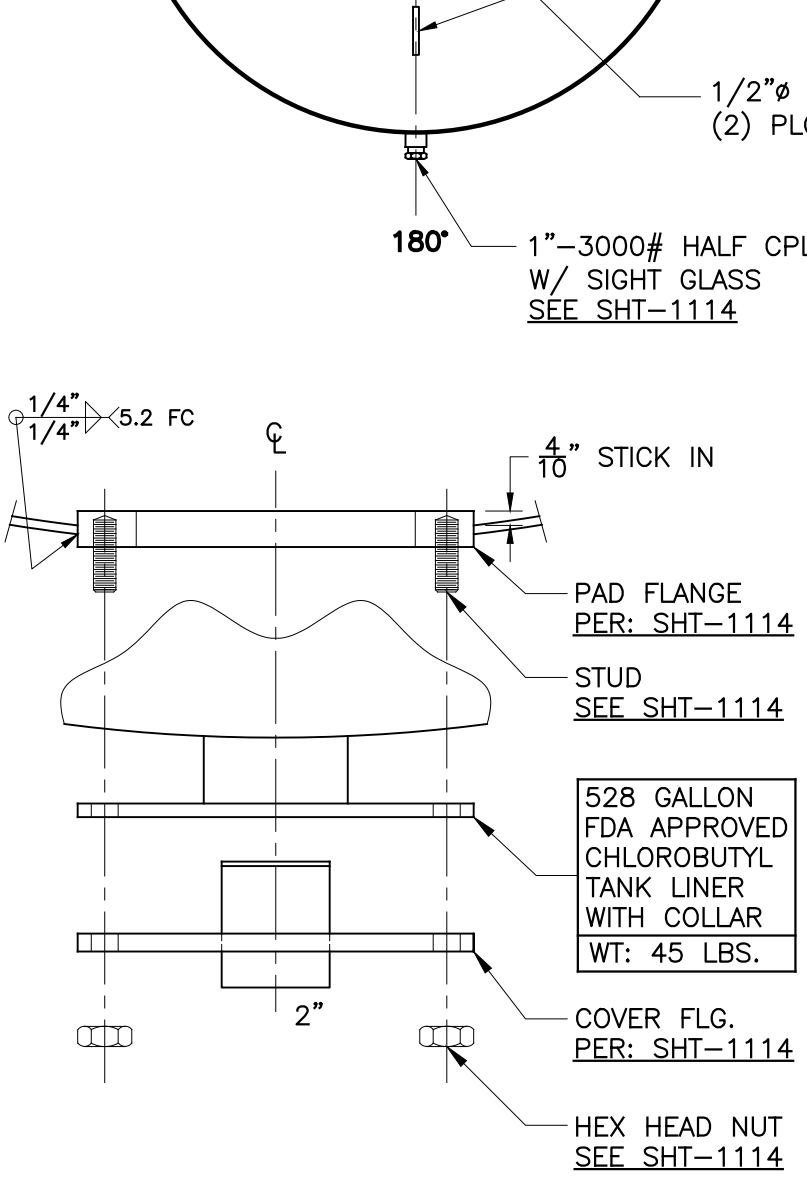

COVER ASSEMBLY DTL.

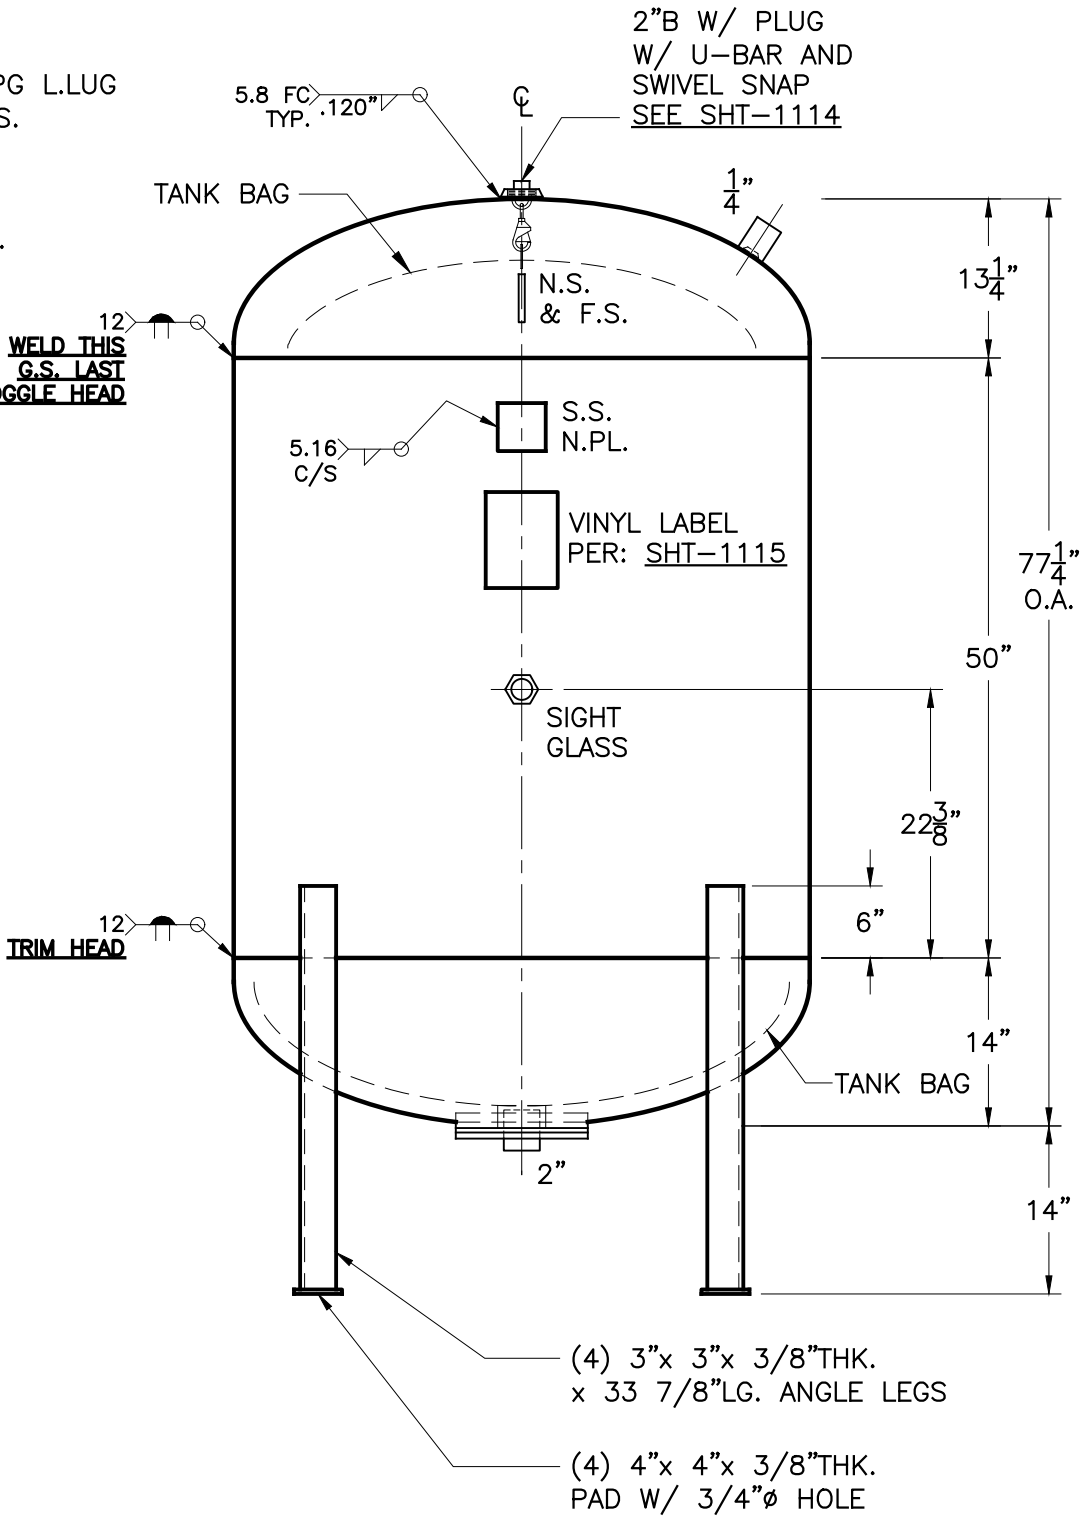

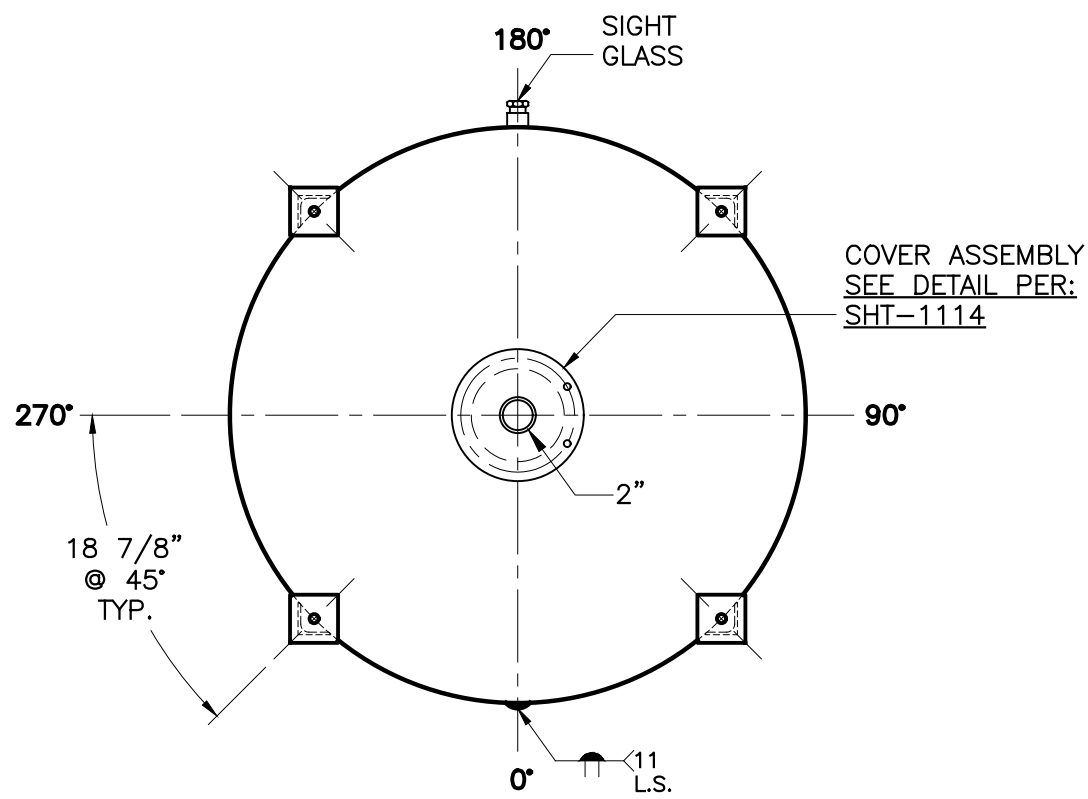

NOTE: 1) HYDRO @ 163 PSIG. MIN.
2) FOR NON CORROSIVE SERVICE–BLADDER TANK.

TOP–.250" SA–455 2:1 S.E.		BB–528–L	REV. 11–7–16
JOGGLE			DATE: 4–1–05
BTM–.250" SA–455 2:1 S.E.		HANSON STANDARD	
TRIM		VERT. BLADDER TANK	
.205" SA–455		SURFACE AREA = 90.5 SQ. FT.	
SHELL / HEADS		INSIDE: UNPAINTED	
M.A.W.P. 125 PSIG. @ 240 °F			
M.D.M.T. 32 °F @ 125 PSIG.		OUTSIDE: PRIMER	
ASME. SECTION VIII DIV. 1, 2015		LEG–ZONE 4–15 KM.	
X–RAY: RT–NO		BY: E.S.	SCALE: 3/4"=12"
GALLONS: 528	WT. 1102 LBS.	ROY E. HANSON JR. MFG.	
SERIAL NO.		LOS ANGELES, CA 90021	
N.B.			