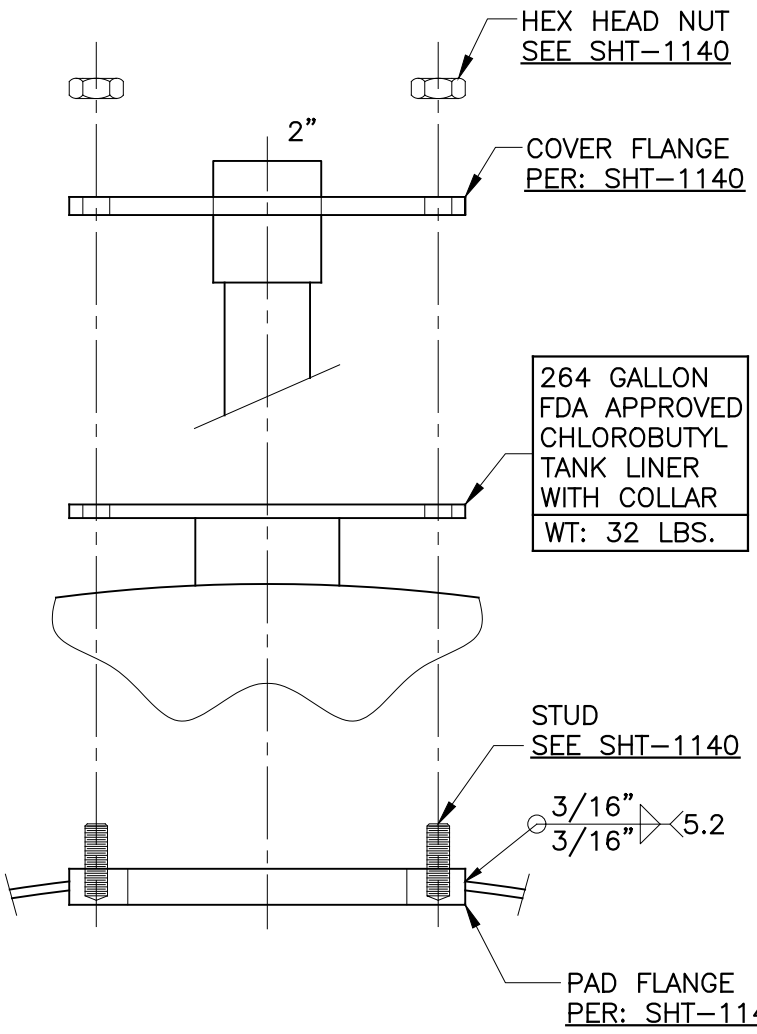

COVER ASSEMBLY DTL.

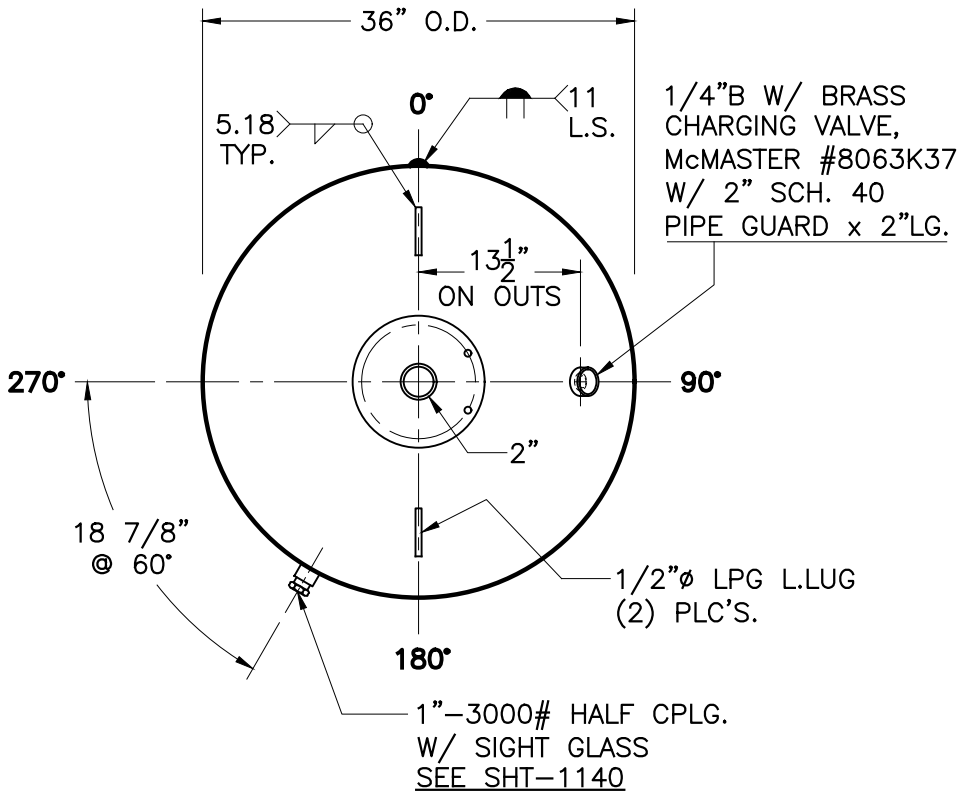

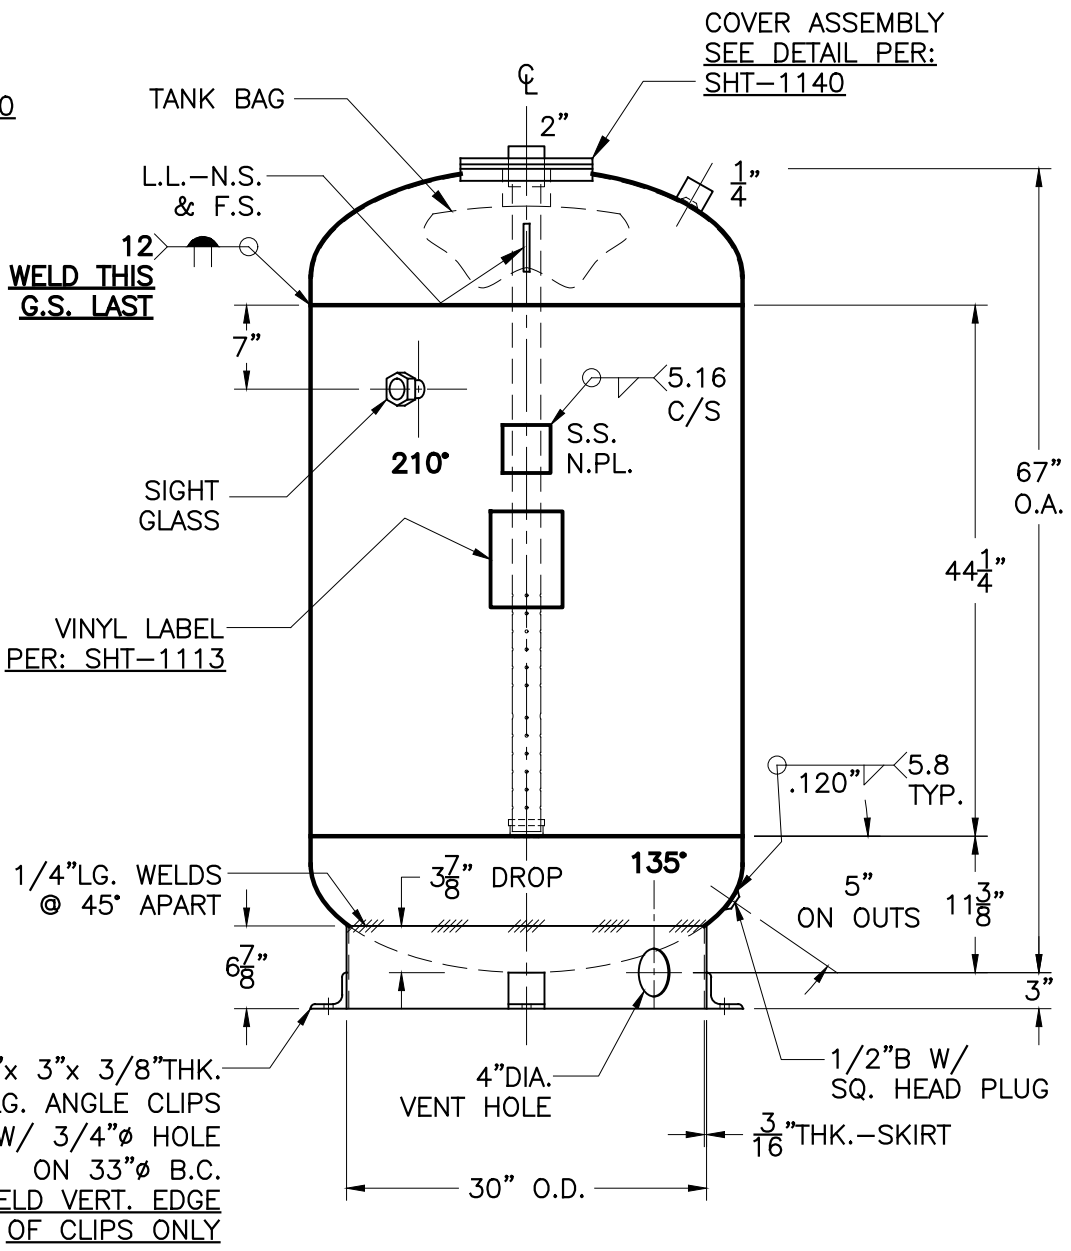

3) WELD BOTTOM GIRTH SEAM LAST.
2) INSPECTION OPENING, UG 46(f)(6).
NOTE: 1) HYDRO @ 163 PSIG. MIN.

SHELL / HEADS	TOP–.189" SA–414–G 2:1 S.E.				
	TRIM				
	.164" SA–414–G				
M.A.W.P. 125 PSIG. @ 240 °F	M.D.M.T. 32 °F @ 125 PSIG.	ASME. SECTION VIII DIV. 1, 2015	X–RAY: RT–NO	GALLONS: 264	WT. 559 LBS.
				SERIAL NO.	N.B.

TB–264–R	REV: 6–21–17
FOR: HANSON STANDARD	DATE: 4–1–05
VERT. BLADDER TANK	
SURFACE AREA = 58.0 SQ. FT.	
INSIDE: UNPAINTED	
OUTSIDE: PRIMER	
BY: E.S.	SCALE: 3/4"=12"

ROY E. HANSON JR. MFG.
LOS ANGELES, CA 90021