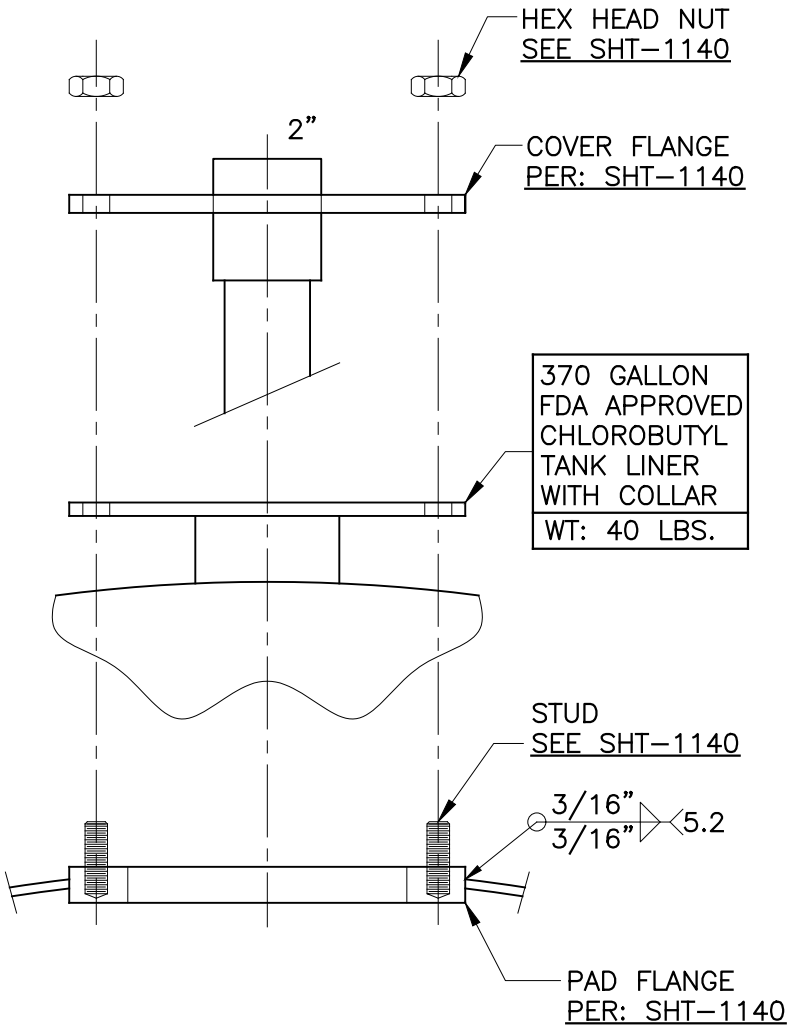

COVER ASSEMBLY DTL.

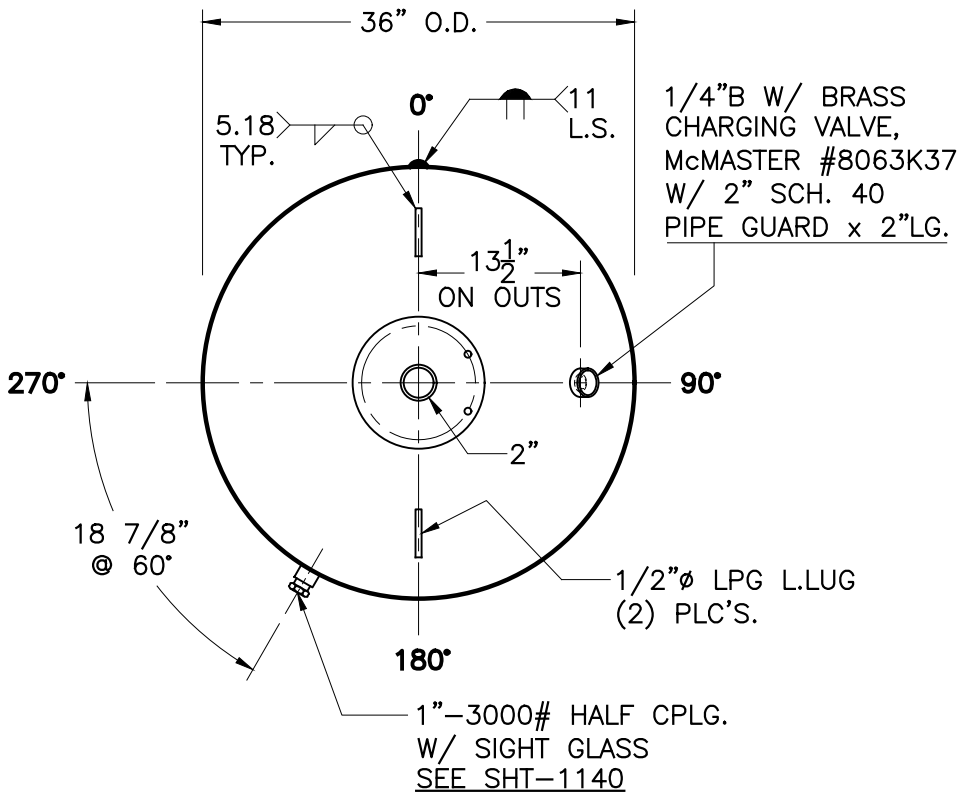

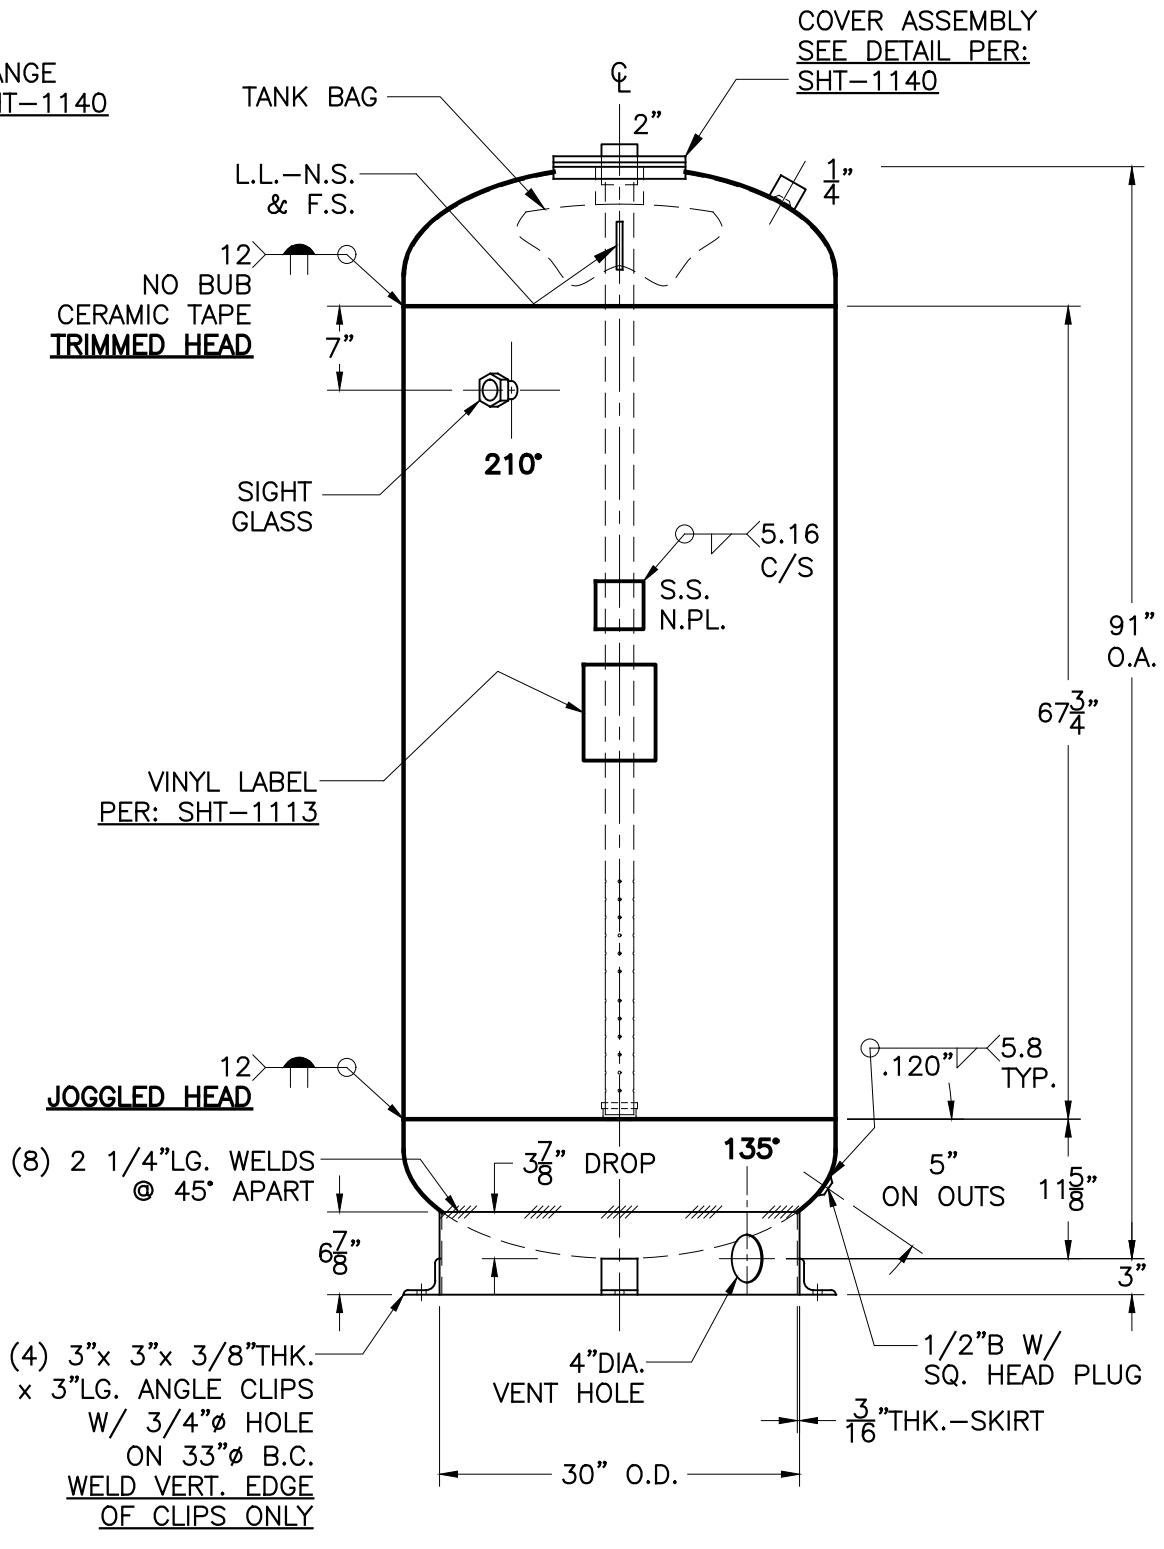

NOTE: 1) HYDRO @ 163 PSIG. MIN.
2) INSPECTION OPENING, UG 46(f)(6).
3) WELD BOTTOM GIRTH SEAM LAST.

SHELL / HEADS	
TRIM	TOP–.189" SA–414–G 2:1 S.E.
	BTM–.189" SA–414–G 2:1 S.E.
JOGGLE	.164" SA–414–G
M.A.W.P. 125 PSIG. @ 240 °F	
M.D.M.T. 32 °F @ 125 PSIG.	
ASME. SECTION VIII DIV. 1, 2015	
X–RAY: RT–NO	
GALLONS: 370 WT. 704 LBS.	
SERIAL NO.	
N.B.	

TB–370–R

REV: 1–12–17
DATE: 4–1–05

FOR: HANSON STANDARD
VERT. BLADDER TANK
SURFACE AREA = 76.9 SQ. FT.
INSIDE: UNPAINTED
OUTSIDE: PRIMER

BY: E.S. SCALE: 3/4"=12"

ROY E. HANSON JR. MFG.
LOS ANGELES, CA 90021