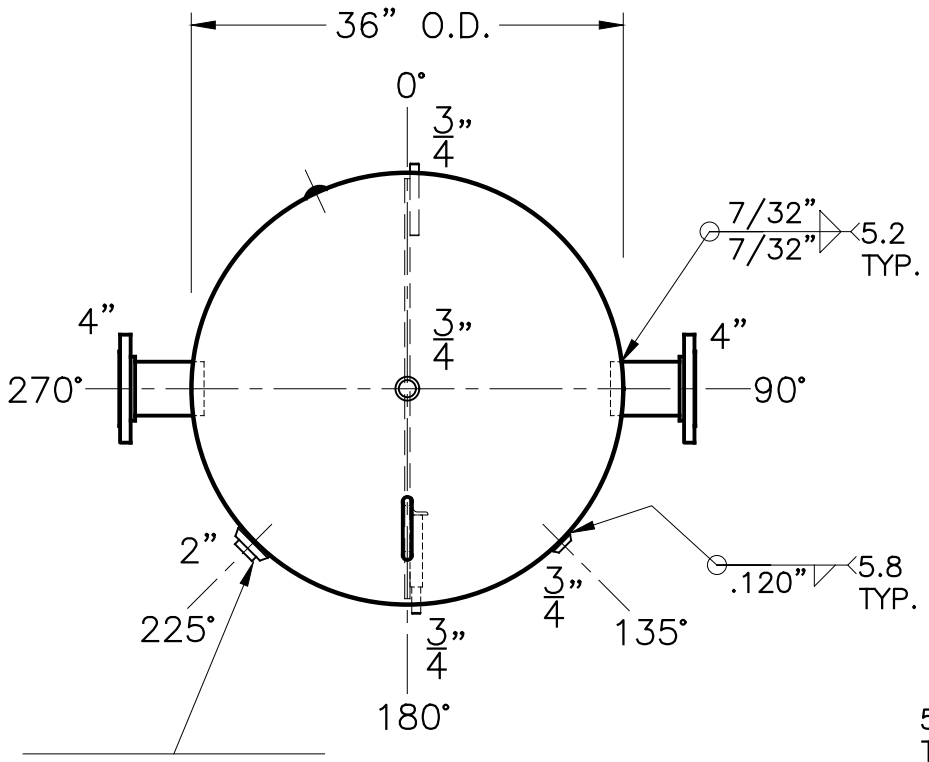

2"R W/ C.I. PLUG
INSP. OPENINGS
(2) PLC'S.

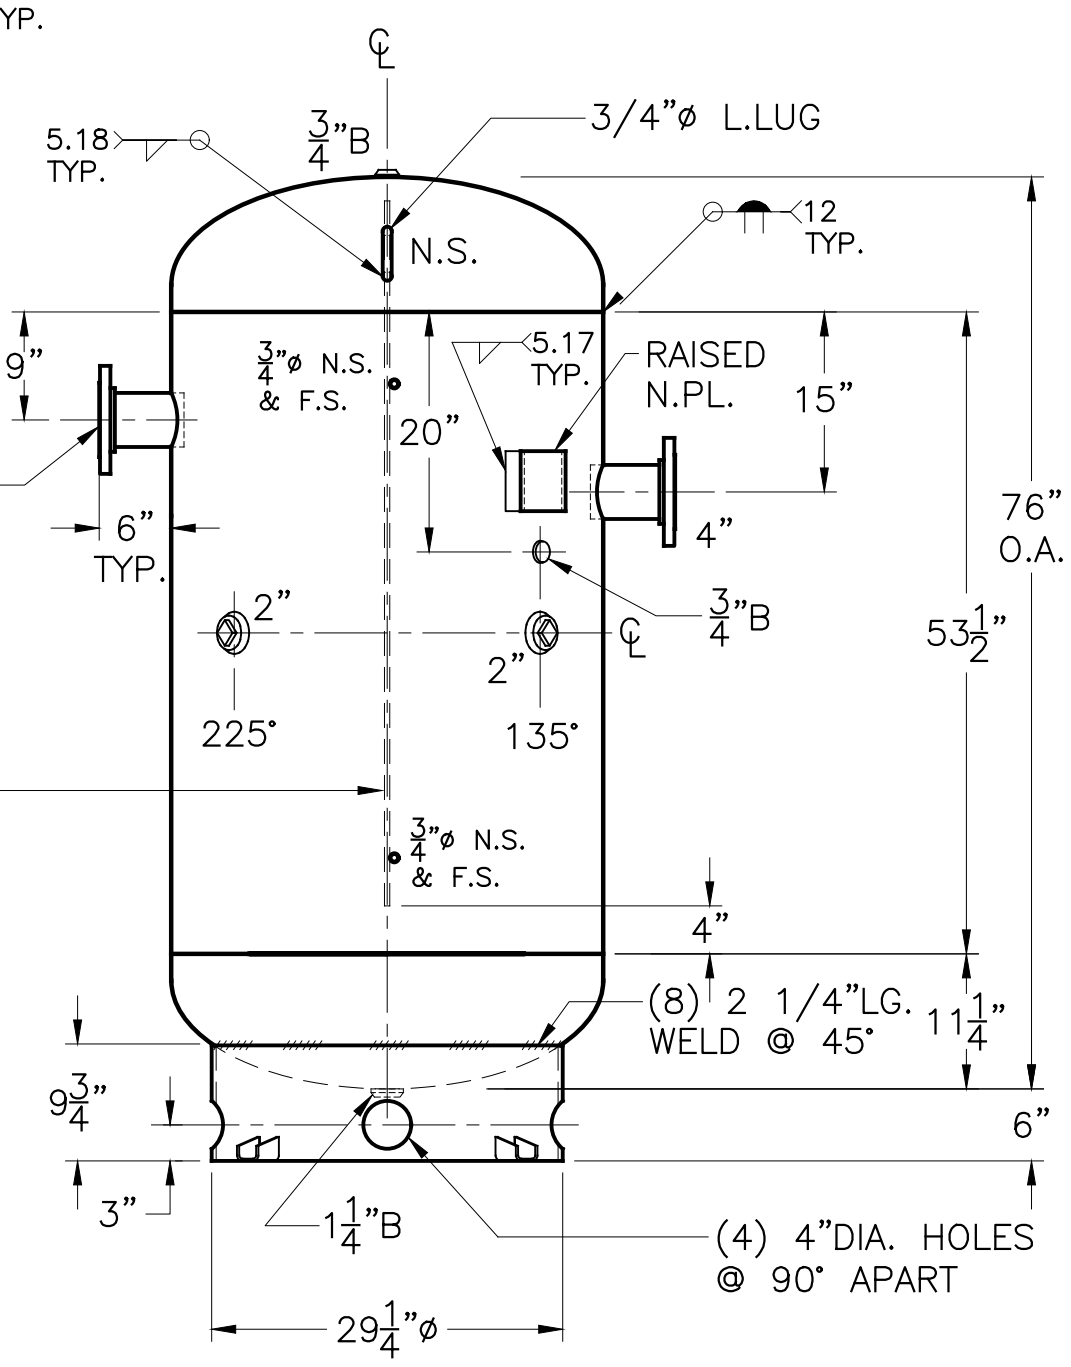

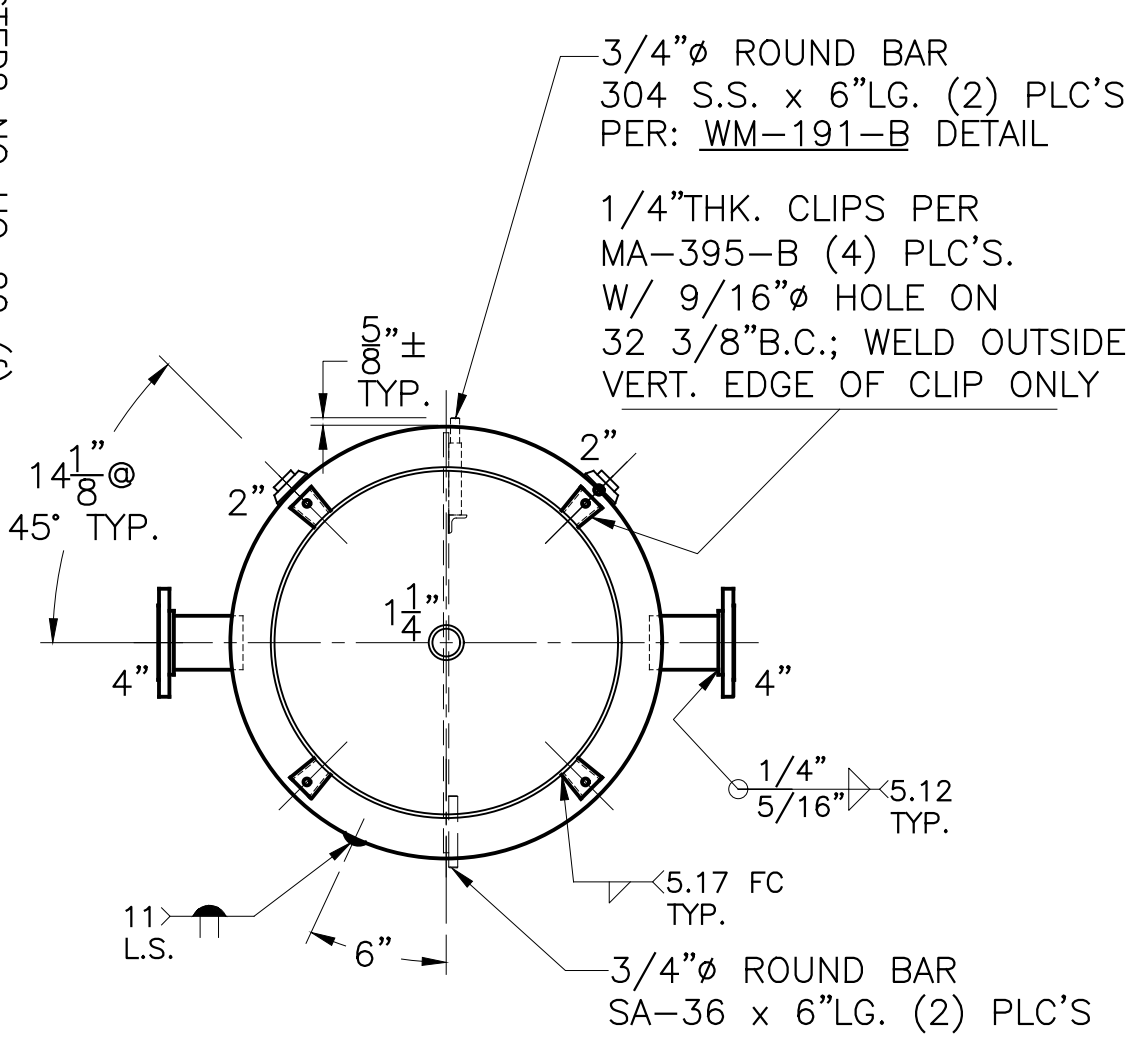

NOTE: 1) HYDRO @ 195 PSIG. MIN.
2) WELD 3/4"ø ROUND BARS TO SHELL AFTER HEADS ARE IN PLACE.
3) CRN: B.C. #K8513.1
4) IMPACT TESTED? NO UG–20 (f) .1

SHELL / HEADS	.182" SA–414–G 2:1 S.E.
	JOGGLE – .149 OFFSET
	.200" SA–455
M.A.W.P. 150 PSIG. @ 125 °F	
M.D.M.T. +20 °F @ 150 PSIG.	
ASME. SECTION VIII DIV. 1, 2010	OUTSIDE: PRIME & R–16
X–RAY: RT–NO	INSIDE: UNPAINTED
GALLONS: 300 WT. 686 LBS.	FOR: HANSON STANDARD
SERIAL NO.	VERT. CHILLED WATER TANK
N.B.	SURFACE AREA = 65.0 SQ. FT.
	UW–21(b)
BY: J.G.	SCALE: 3/4"=12"

WL–147–B REV. 10–19–11 DATE: 6–14–05

ROY E. HANSON JR. MFG.
1600 E. WASHINGTON BLVD.
LOS ANGELES, CA 90021