


SUPPORTS PER:
 MA-102-3-C
 NO PADS

(2) 5/8"Ø HOLE

- 3) PRE HEAT BEFORE WELDING TO 150°F
 - 2) ALL CPLG'S ARE 3000# HALF, EXCEPT 1/4"-3000# FULL CPLG.
- NOTE: 1) HYDRO @ 715 PSIG. MIN.

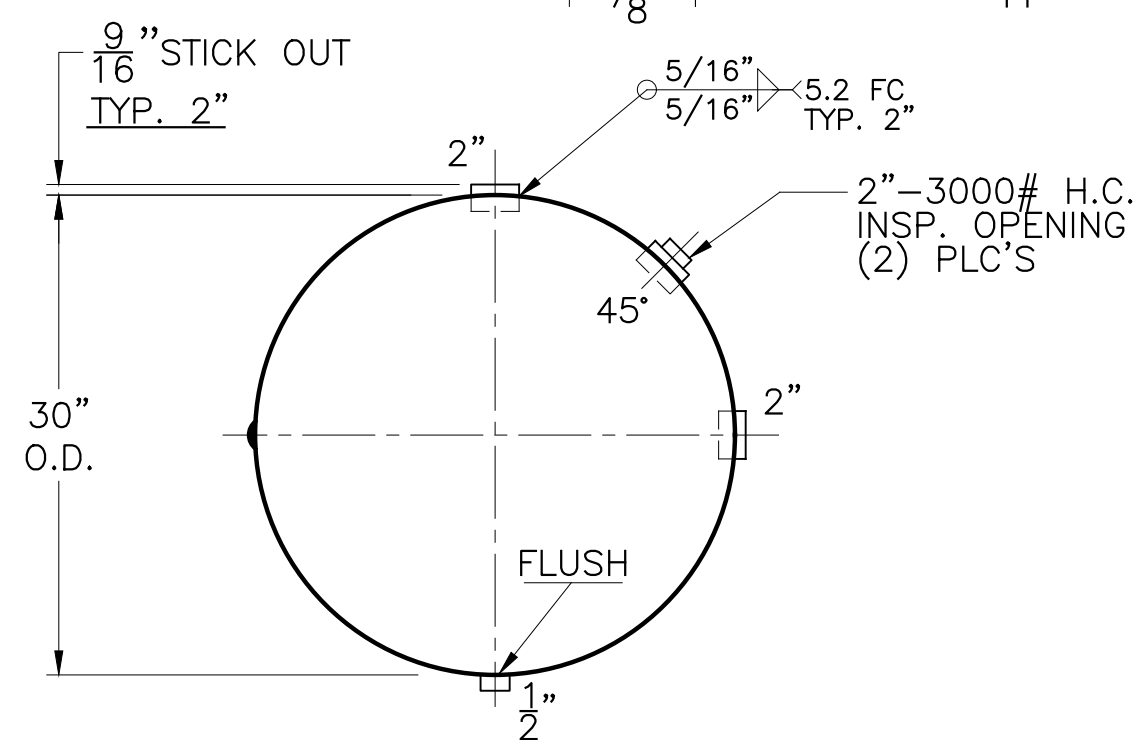

VIEW W/OUT SUPT'S

SHELL / HEADS	.500" SA-516-70 2:1 S.E.		30-HK-200-W	REV. 6-6-11
	(.472"MIN.) - BEVEL			DATE: 10-29-02
	HOT FORMING NOT REQUIRED		FOR: HANSON STANDARD	
	UCS 79(d)		HORIZ. AIR TANK	
	.500" SA-516-70		SURFACE AREA = 51.8 SQ. FT.	
M.A.W.P. 550 PSIG. @ 400 °F		INSIDE: UNPAINTED		
M.D.M.T. -20 °F @ 550 PSIG.		OUTSIDE: PRIME		
ASME SECTION VIII DIV. 1, 2010 ADD 2010		CAD-"B" SIZE UNDER "STD"-SERIES		
X-RAY: RT-4 SPOT L.S. ONLY		BY: J.G. SCALE: 1"=12"		
GALLONS: 200		WT. 1221 LBS.		
SERIAL NO.		ROY E. HANSON JR. MFG.		
		1600 E. WASHINGTON BLVD. LOS ANGELES, CA 90021		