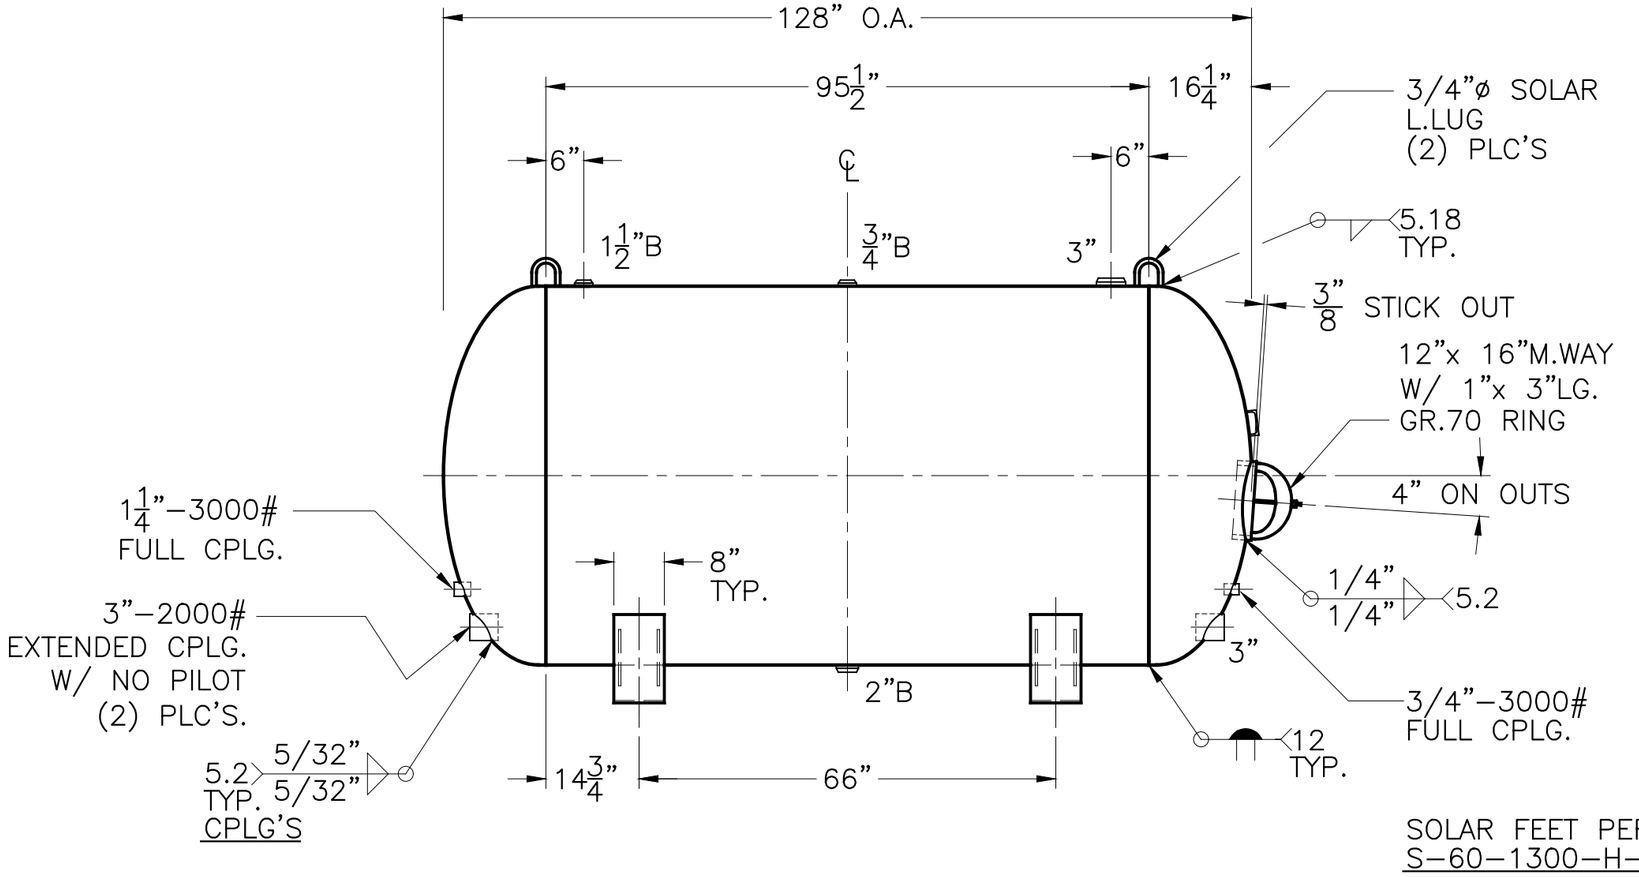

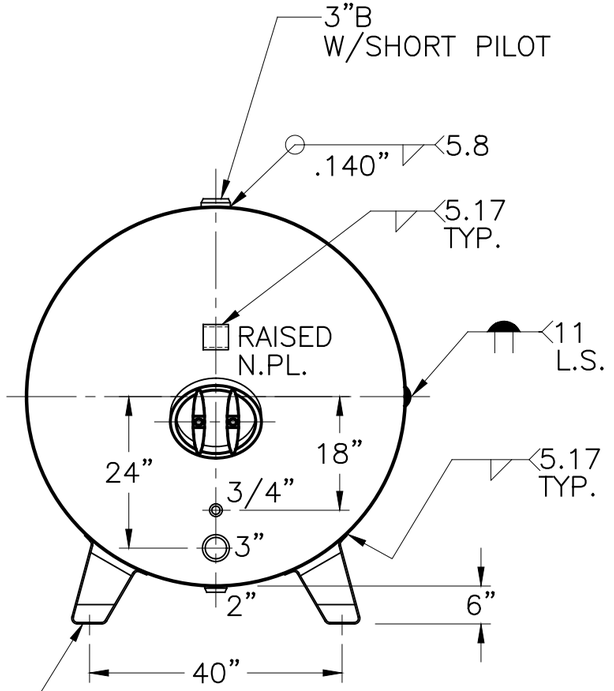

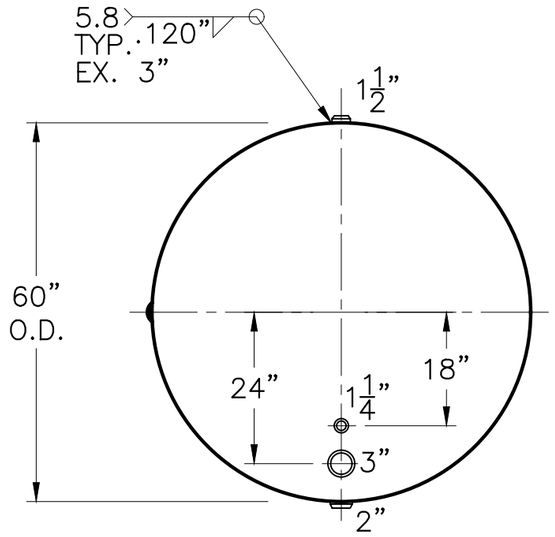

VIEW W/OUT SUPT'S

NOTE: 1) HYDRO @ 163 PSIG. MIN.

SHELL / HEADS	.248" SA–455 2:1 S.E.
	(.211" MIN.)
	.207" SA–455
M.A.W.P.	125 PSIG. @ 180 °F
M.D.M.T.	–20 °F @ 125 PSIG.
ASME. SECTION VIII	DIV. 1, 2001 ADD 2003
X–RAY:	RT–4 SPOT L.S. & HDS. G.S.
GALLONS:	1450
WT.	2000 LBS.
SERIAL NO.	
N.B.	

ES–60–1450–H	REV. 9–21–04
	DATE: 10–5–89
FOR:	HANSON STANDARD
	HORIZ. WATER TANK.
	SURFACE AREA = 180.2 SQ. FT.
INSIDE:	EPOXY LINED
OUTSIDE:	PRIME
	CAD "B" SIZE UNDER "STD"–SERIES
BY: J.G.	SCALE: 1/2"=12"

ROY E. HANSON JR. MFG.
1924 COMPTON AVE.
LOS ANGELES, CA 90011