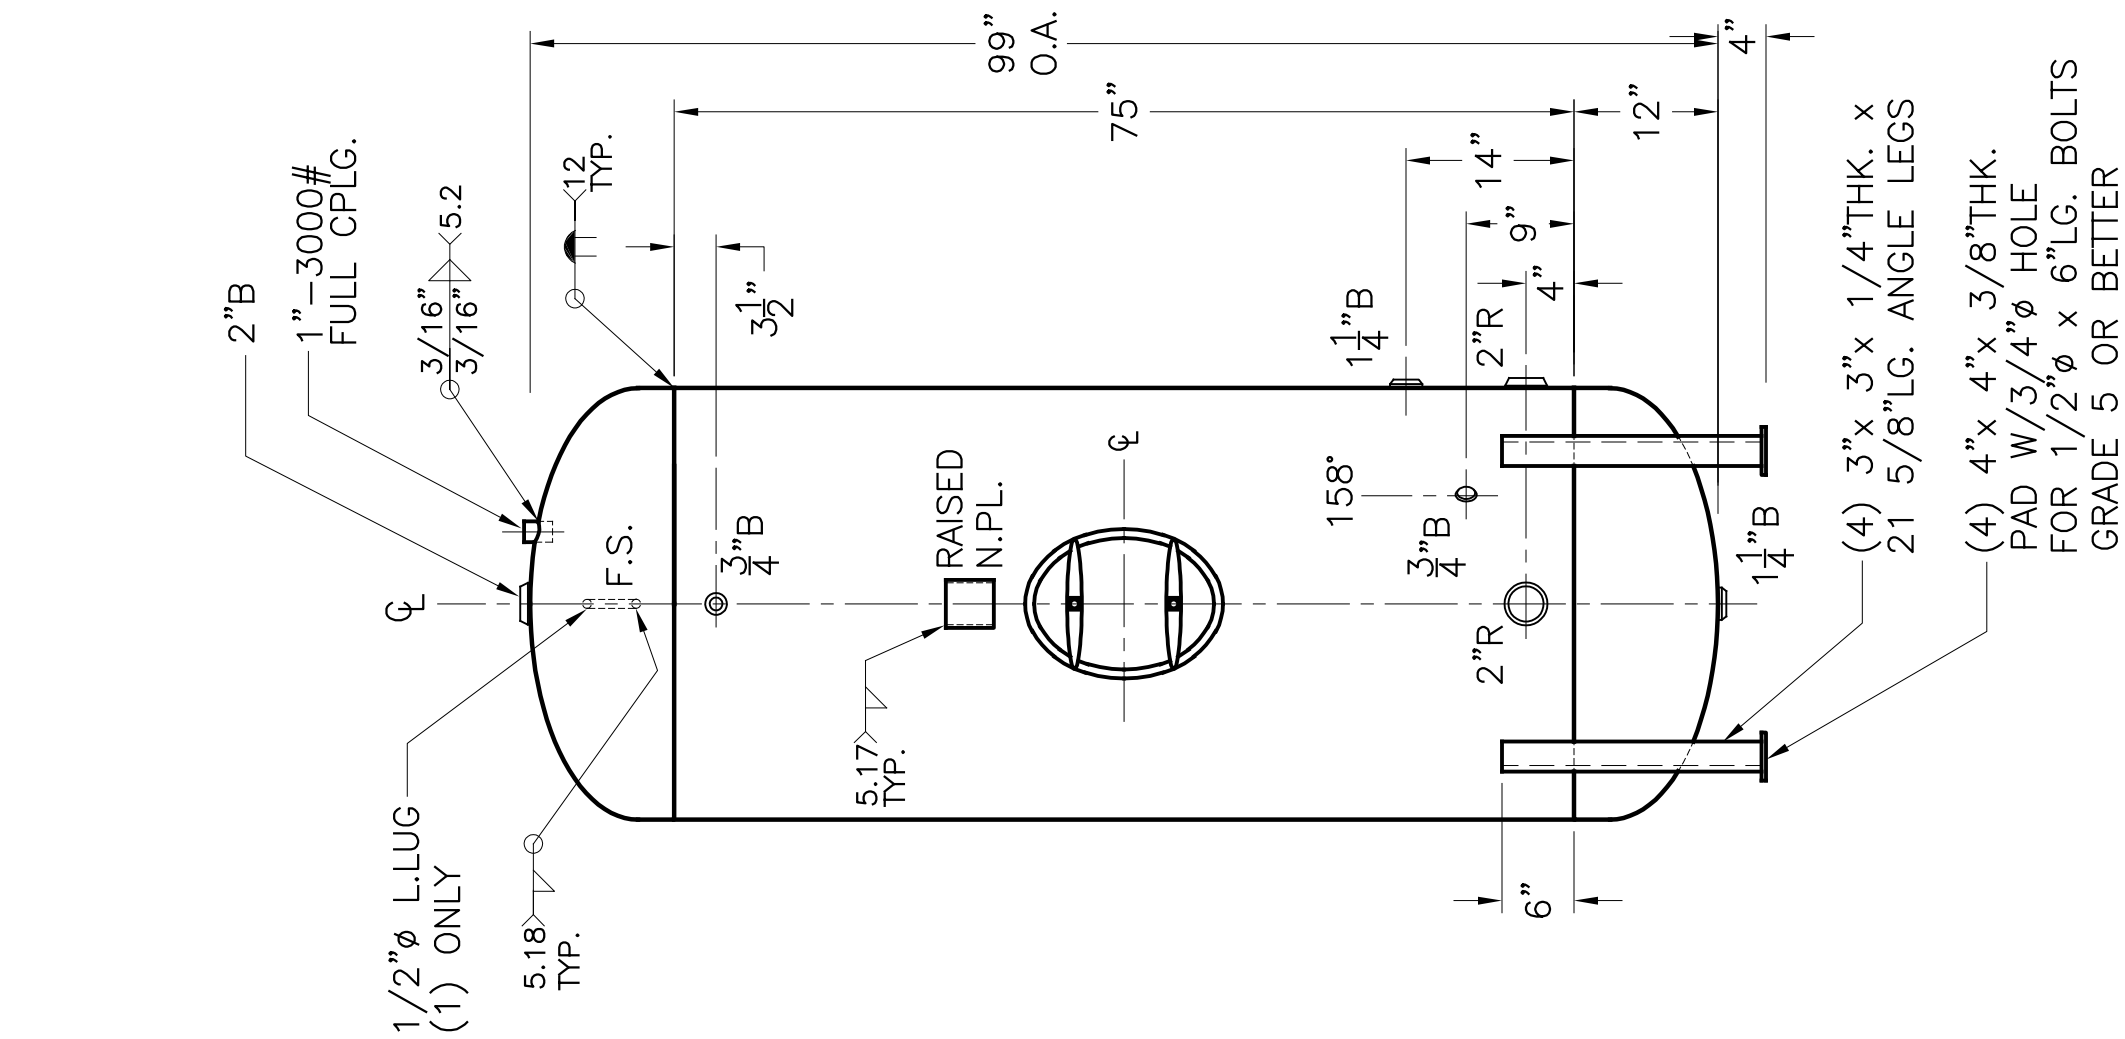

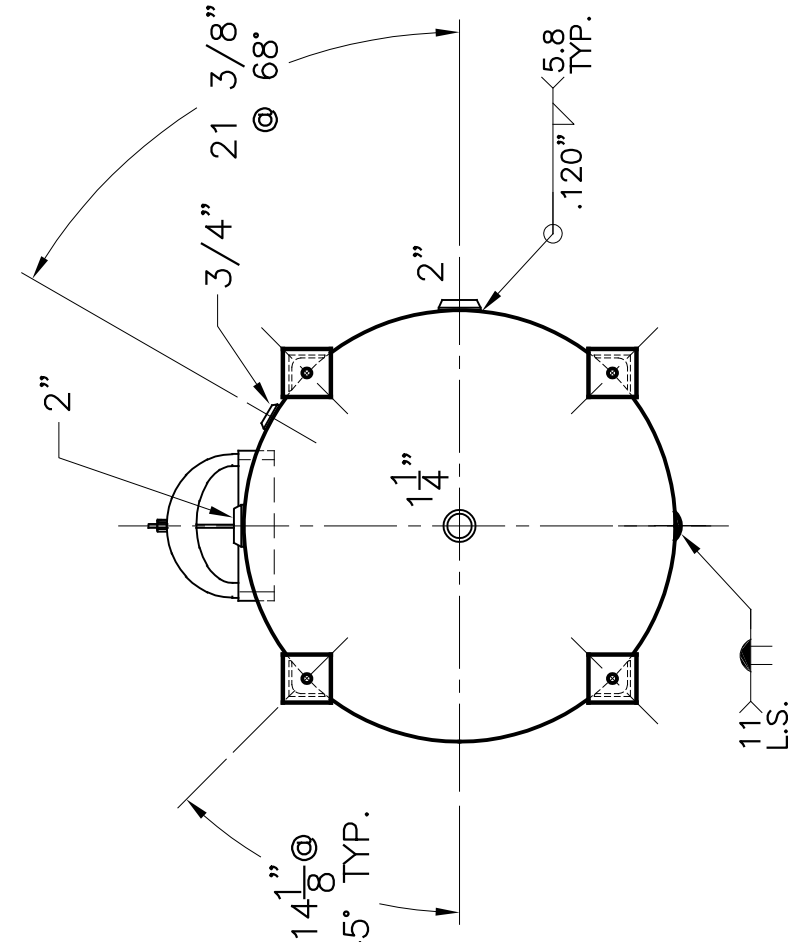

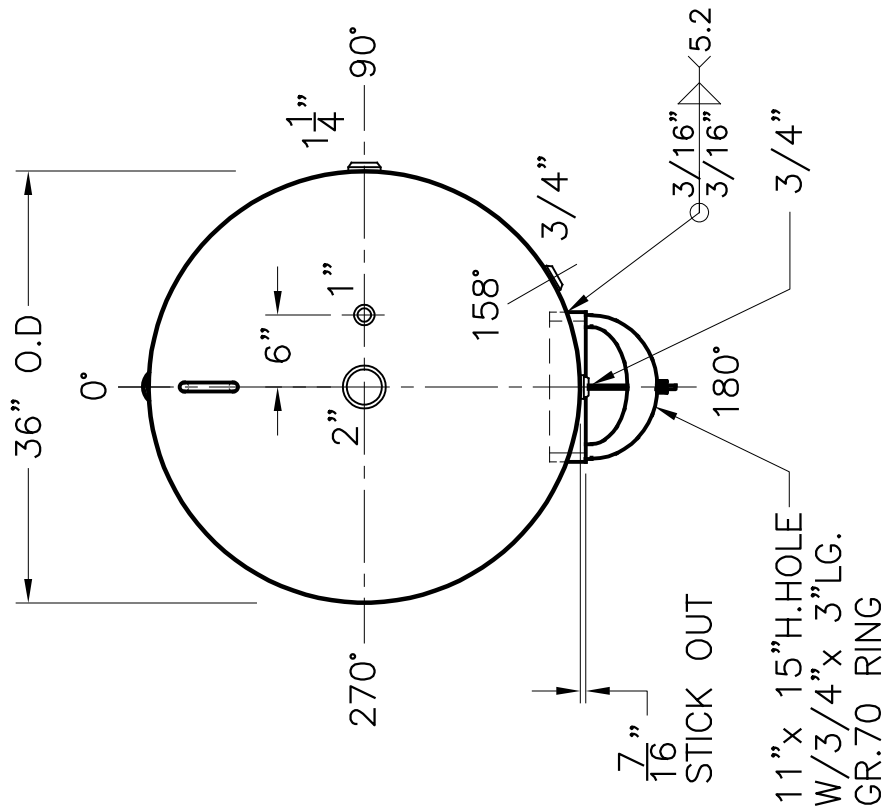

NOTE: 1) HYDRO @ 240 PSIG.
2) 4–1–04 PROOF TEST.

SHELL / HEADS	.182" SA–455 2:1 S.E.	ES–36–400–V	REV: 1–17–07
	JOGGLE – .149 OFFSET		DATE: 8–31–89
		FOR: HANSON STANDARD	
		VERT. HOT WATER TANK	
	.166" SA–414–G	SURFACE AREA = 99.0 SQ. FT.	
M.A.W.P. 160 PSIG. @ 180 °F		INSIDE: EPOXY LINED	
		OUTSIDE: PRIME	
ASME. SECTION IV 2004 ADD 2006		CAD "B" SIZE UNDER "STD"–SERIES	
X–RAY: RT–NO / H.L.W.		LEG ZONE: 4–15 KM. DATE: 1–10–03	
GALLONS: 400	WT. 669 LBS.	BY: J.G.	SCALE: 3/4"=12"
SERIAL NO.		ROY E. HANSON JR. MFG.	
N.B.		1600 E. WASHINGTON BLVD. LOS ANGELES, CA 90021	