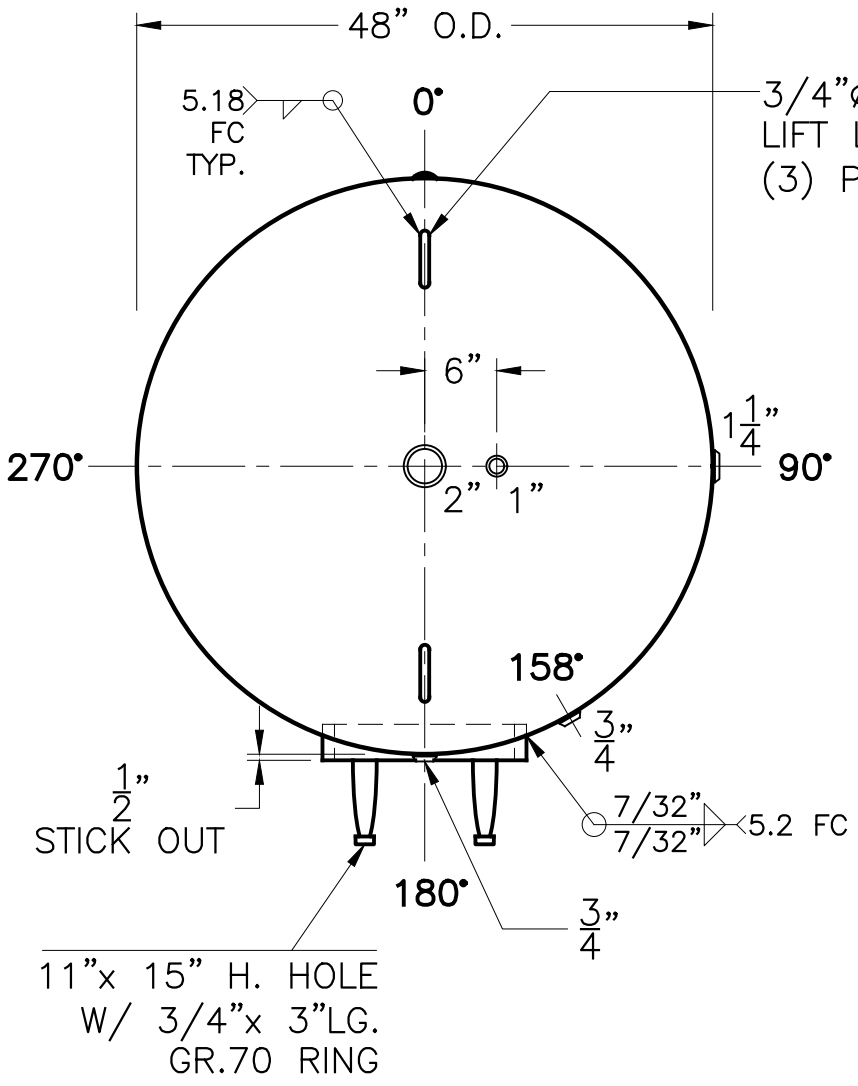

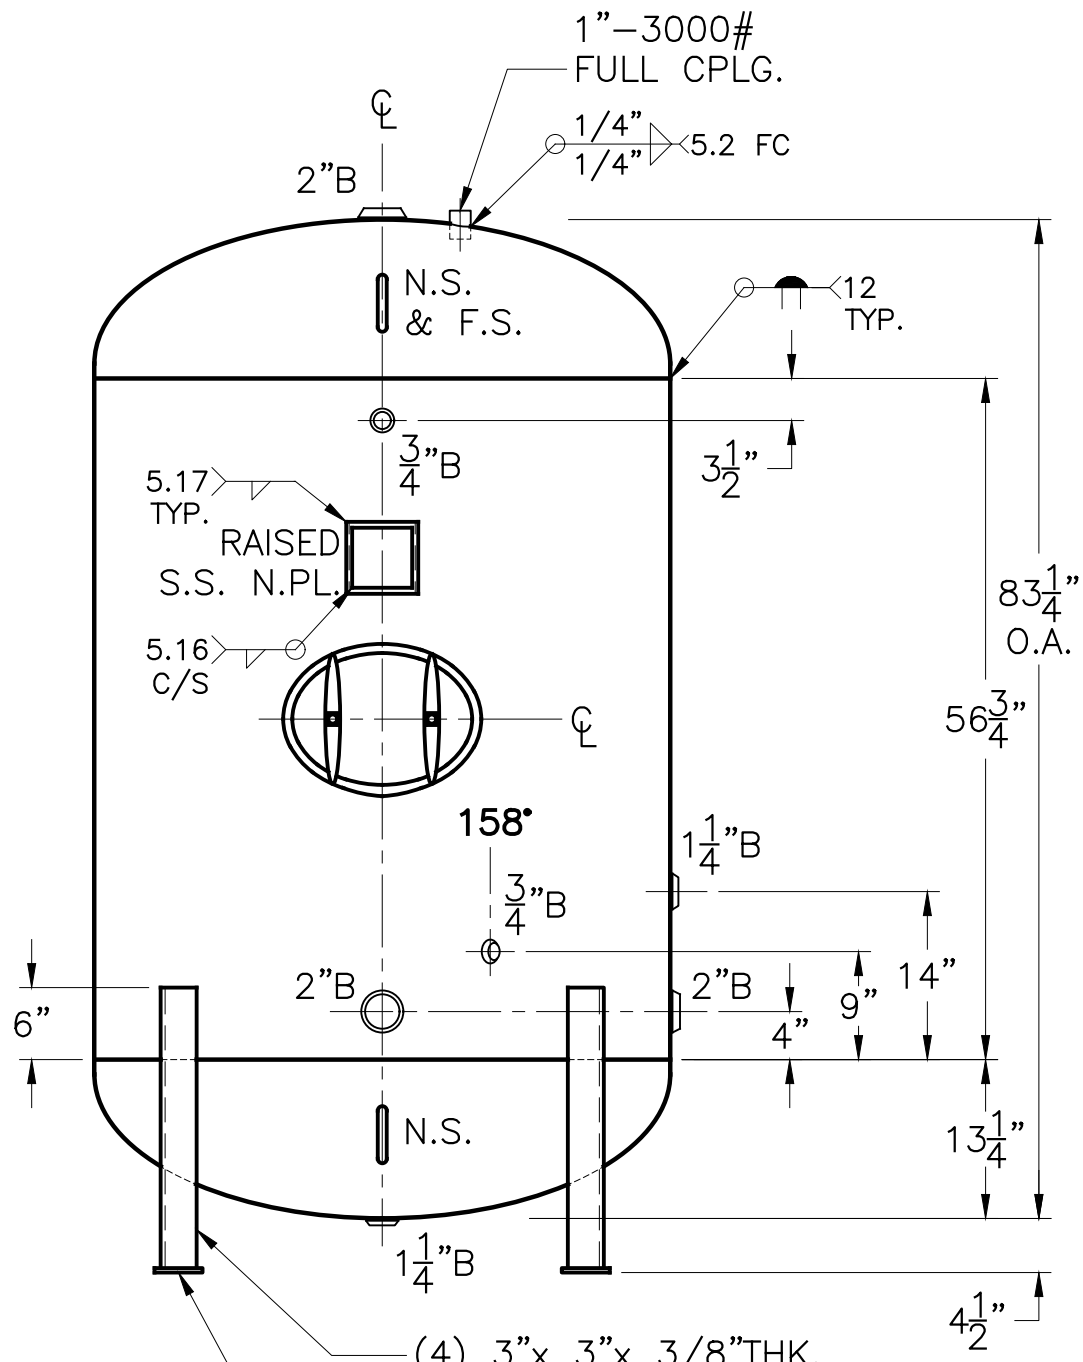

NOTE: 1) HYDRO @ 240 PSIG.
2) 4–22–04 PROOF TEST.

SHELL / HEADS	
.245" SA–455 2:1 S.E.	
JOGGLE – .208" OFFSET	
.205" SA–455	
M.A.W.P. 160 PSIG. @ 180 °F	
ASME. SECTION VIII 2013	
X–RAY: RT–NONE / H.L.W.	
GALLONS: 585	WT. 1014 LBS.
SERIAL NO.	
N.B.	

ES–48–585–V

REV.	3–18–14
DATE:	5–1–89

FOR: HANSON STANDARD
VERT. WATER TANK
SURFACE AREA = 94.5 SQ. FT.

INSIDE: EPOXY LINED

OUTSIDE: PRIME & R–16 FOAM
LEG–ZONE 4–15 KM.
CAD "B" SIZE UNDER STD. SERIES

BY: E.S. SCALE: 3/4"=12"
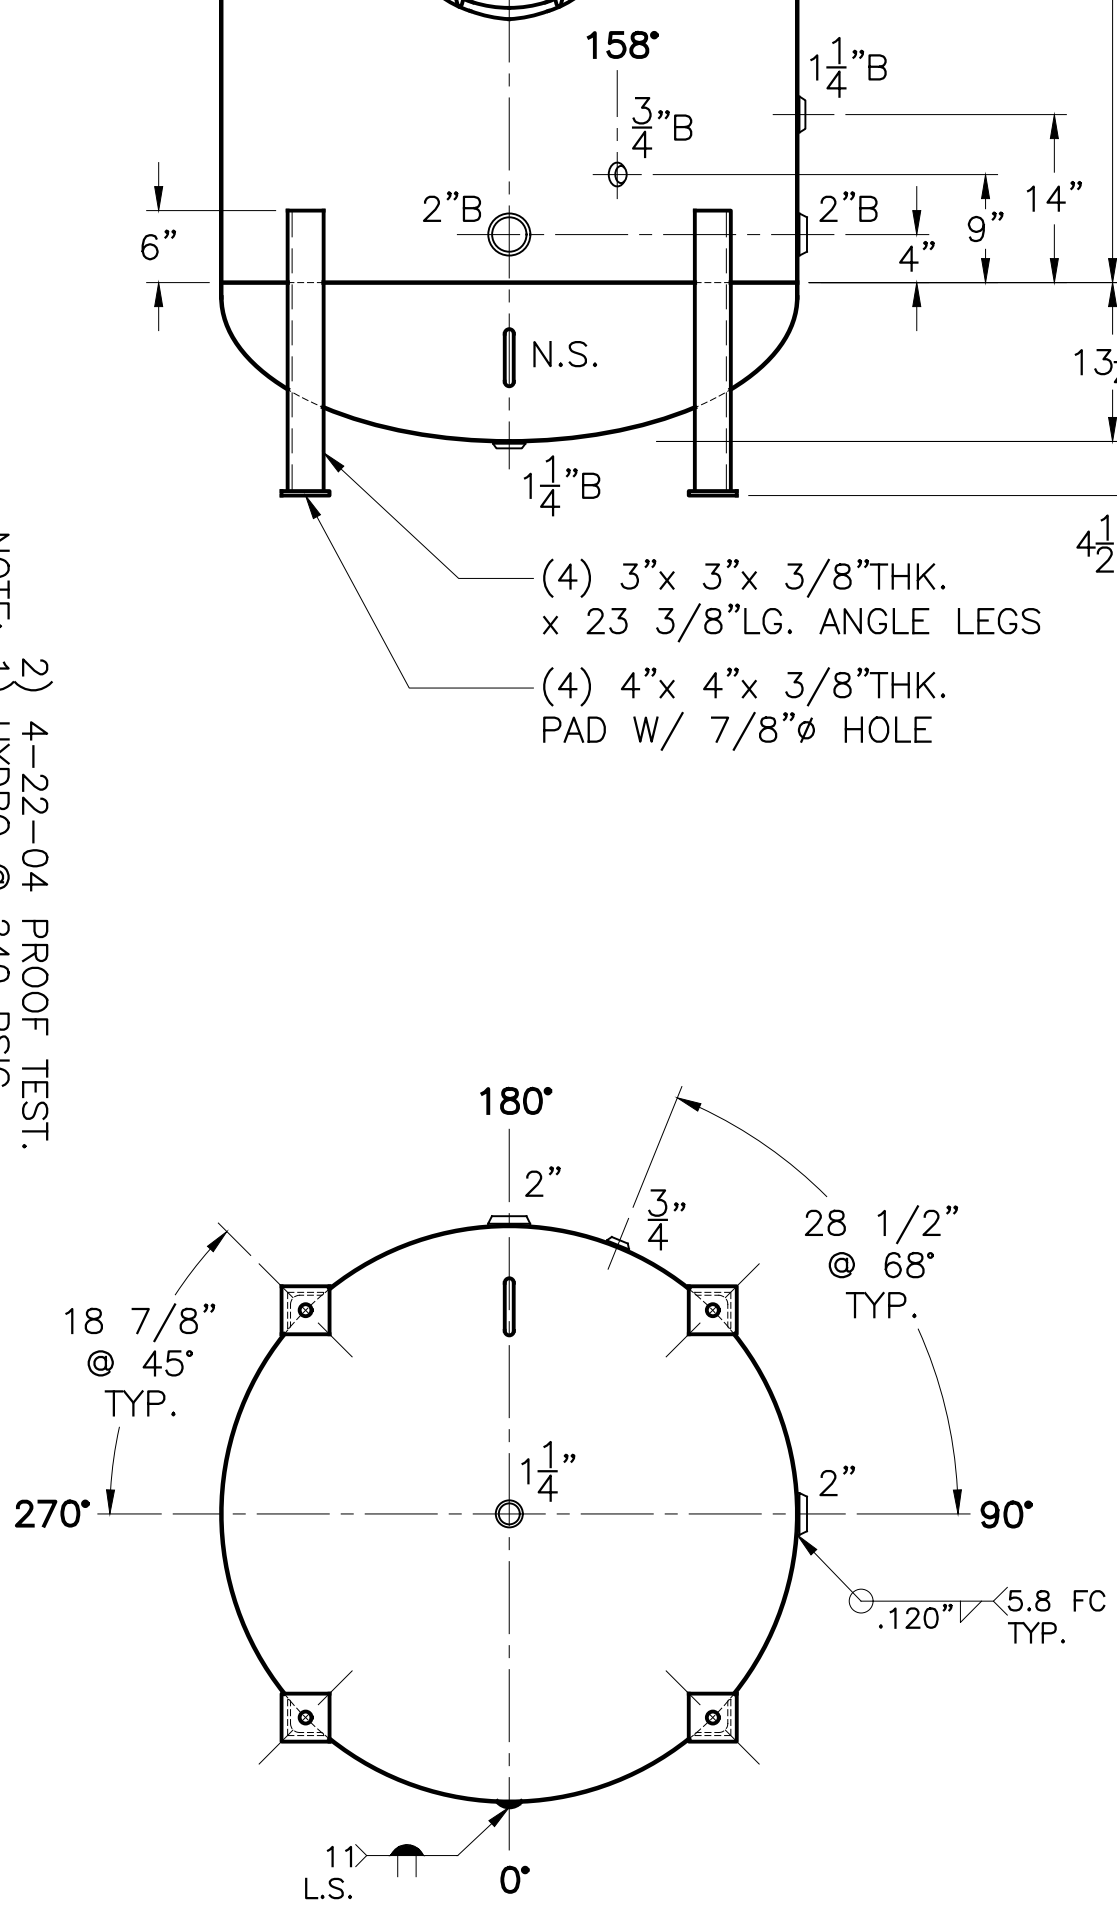
ROY E. HANSON JR. MFG.
1600 E. WASHINGTON BLVD.
LOS ANGELES, CA 90021