JOB No.	
DATE:	

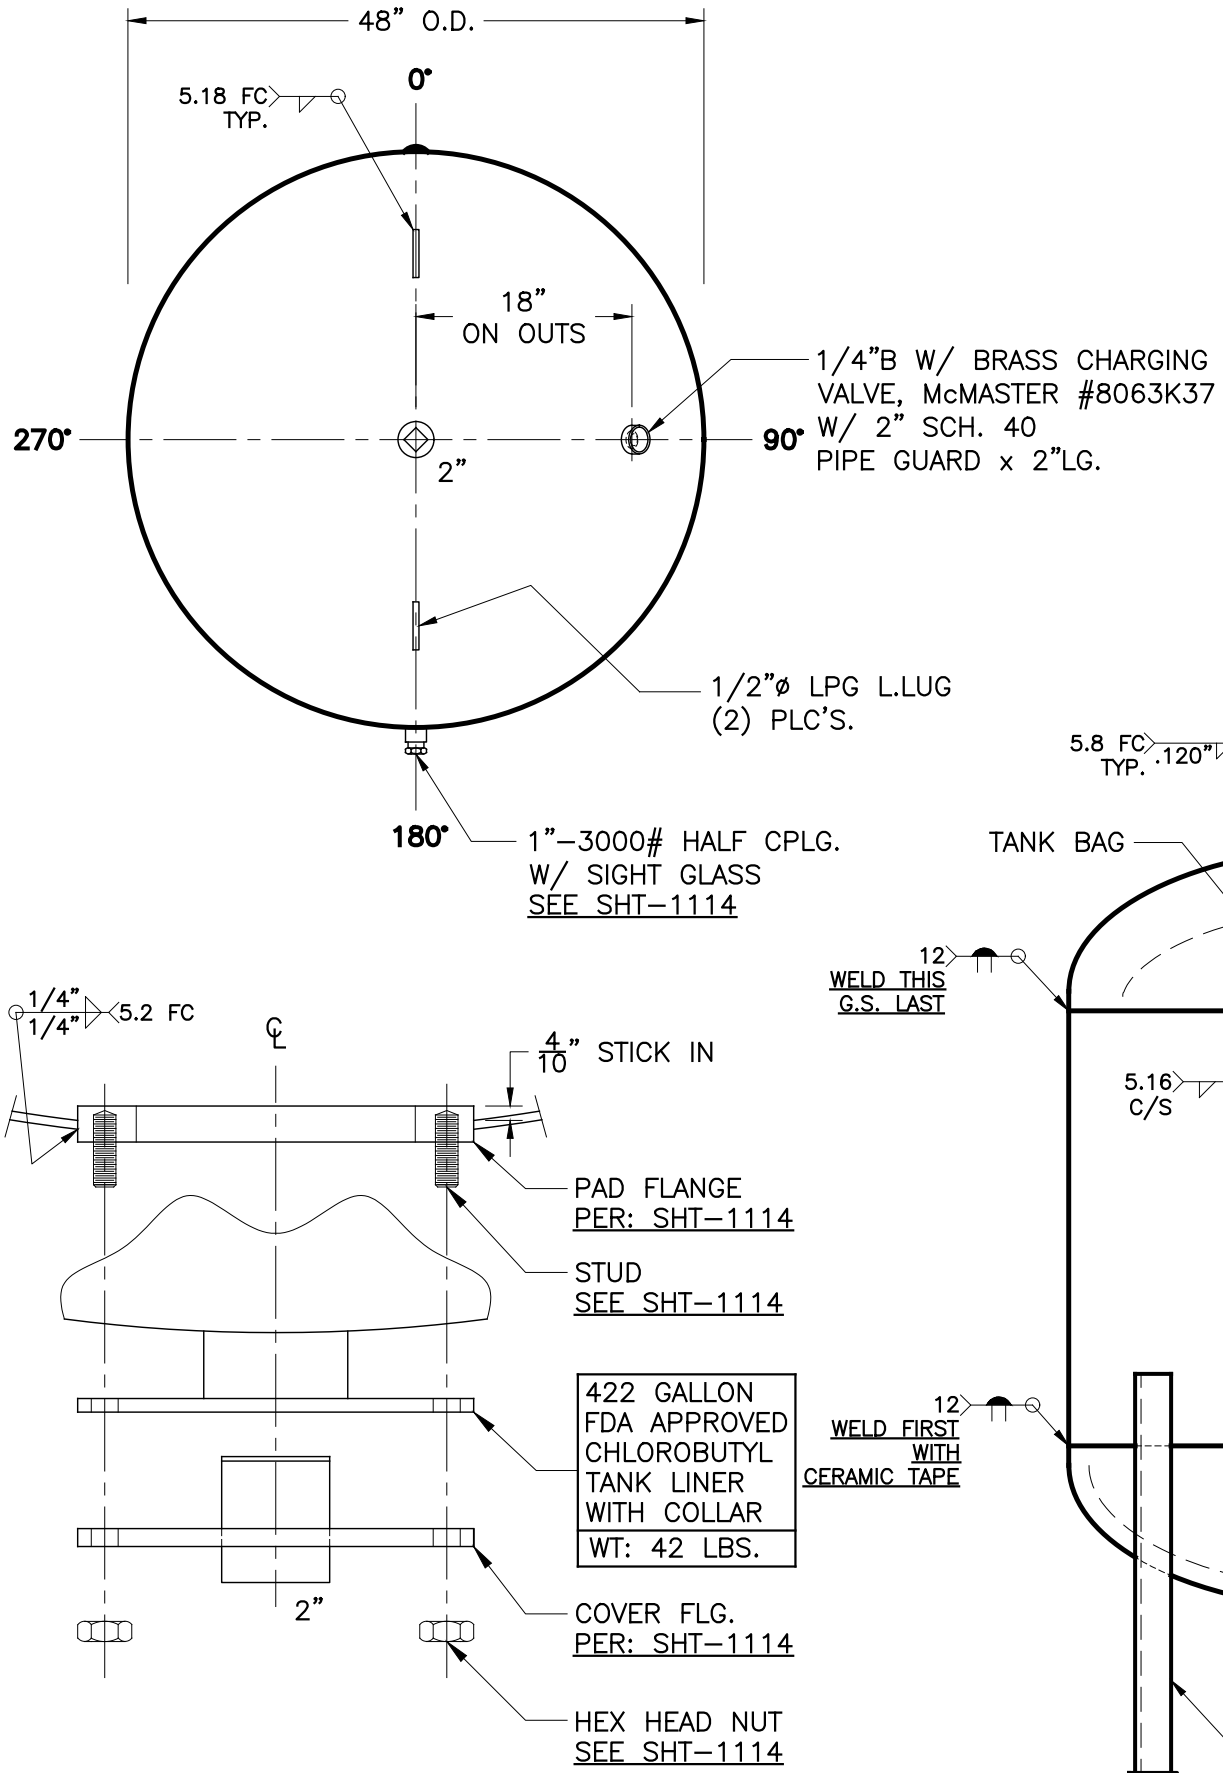

COVER ASSEMBLY DTL.

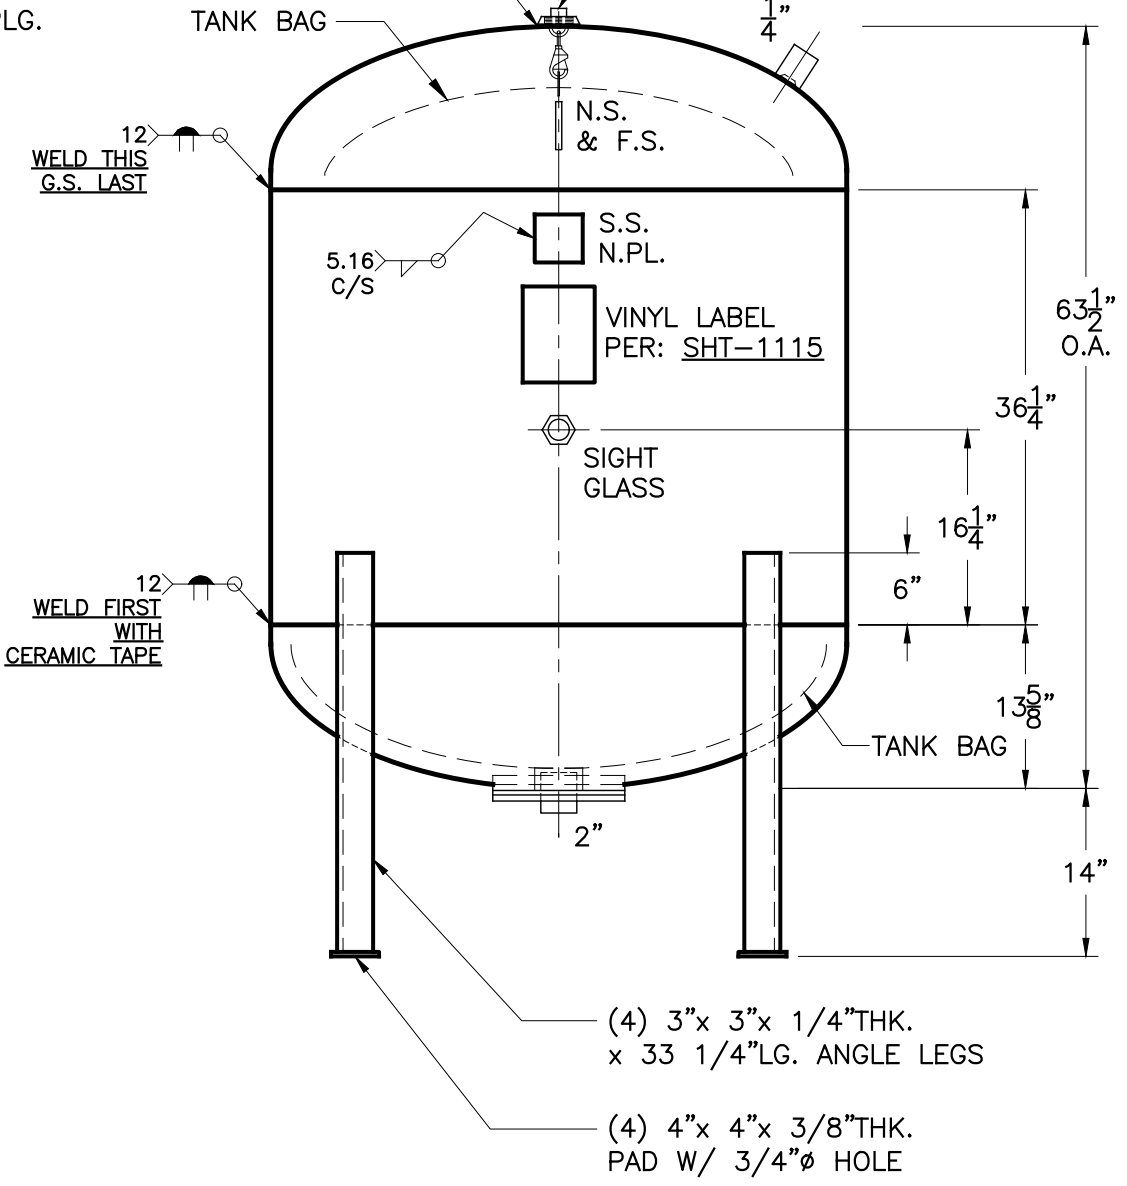

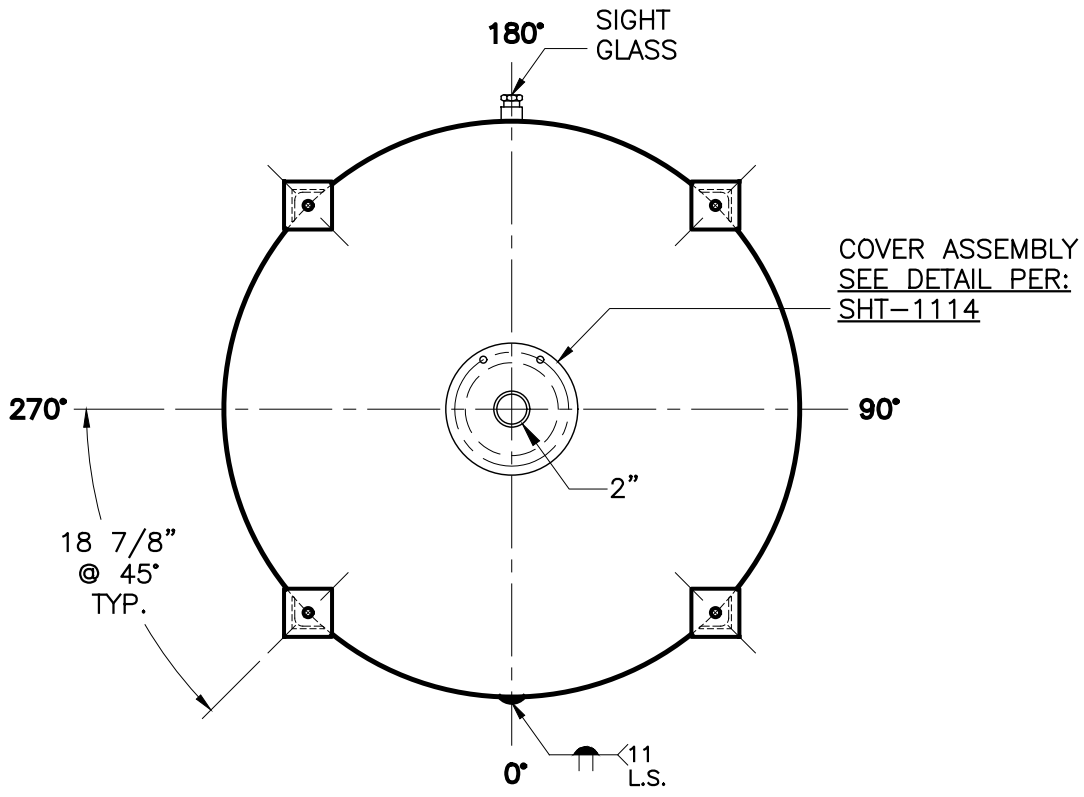

NOTE: 1) HYDRO @ 163 PSIG. MIN.
2) FOR NON CORROSIVE SERVICE–BLADDER TANK.

SHELL / HEADS	.250" SA–455 2:1 S.E.				
	TOP–JOGGLE				
	BTM–TRIM				
	.205" SA–455				
M.A.W.P.	125	PSIG. @	240	°F	
M.D.M.T.	32	°F @	125	PSIG.	
ASME. SECTION VIII DIV. 1, 2021					
X–RAY:	RT–NO				
GALLONS:	422	WT.	938	LBS.	
SERIAL NO.					
N.B.					

BB–422–L	REV. 11–8–22
	DATE: 4–1–05
HANSON STANDARD	
VERT. BLADDER TANK	
SURFACE AREA = 76.1 SQ. FT.	
INSIDE: UNPAINTED	
OUTSIDE: PRIMER	
LEG–ZONE 4–15 KM.	
BY: J.G.	SCALE: 3/4"=12"

ROY E. HANSON JR. MFG.
LOS ANGELES, CA 90021