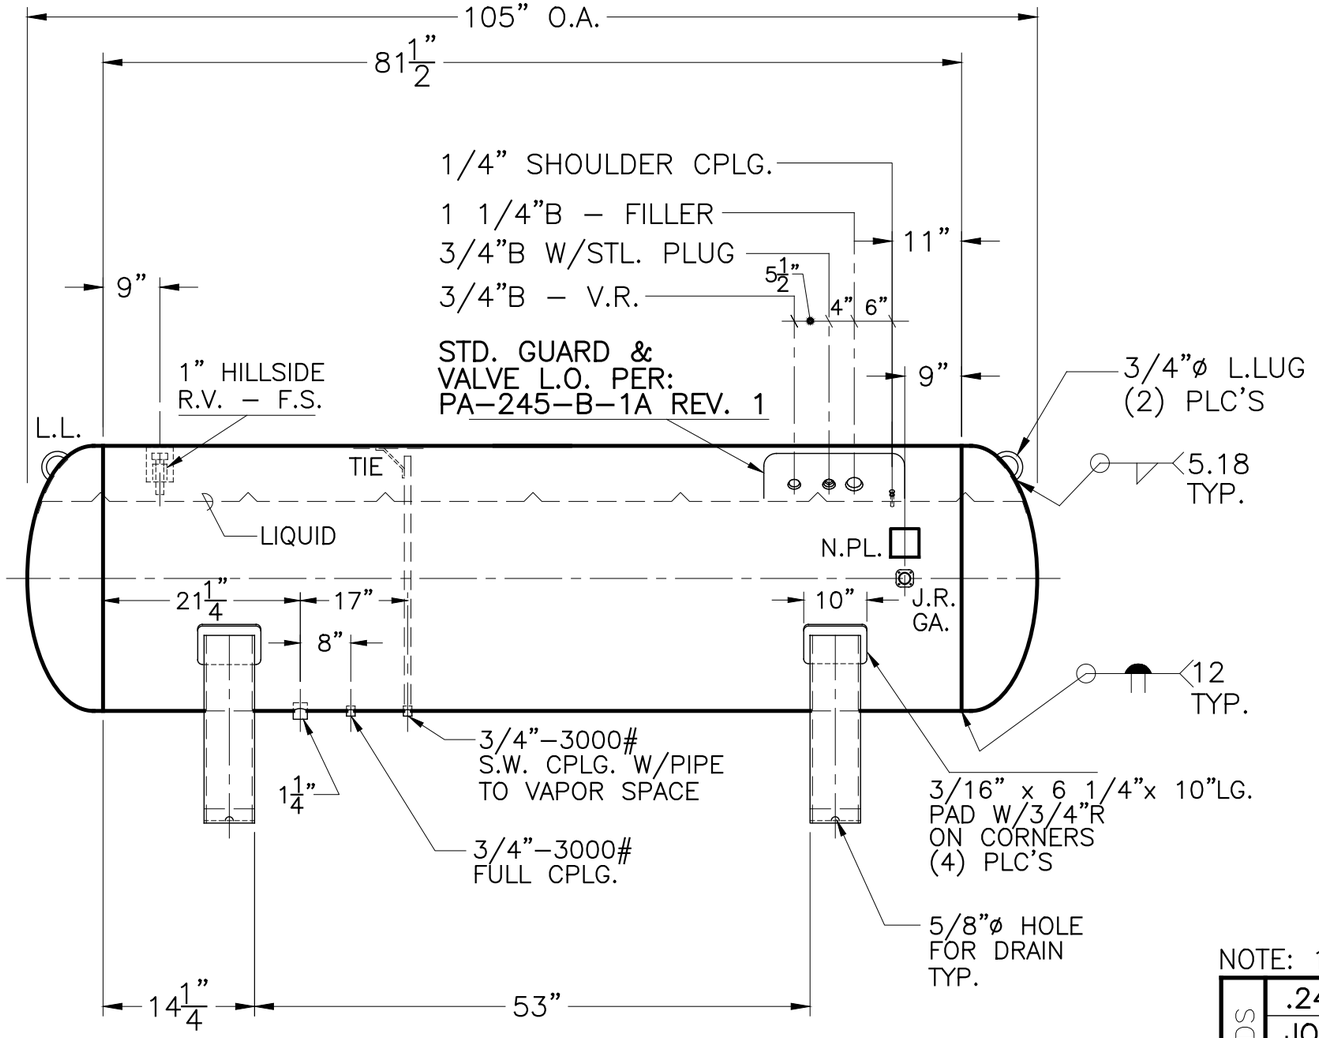

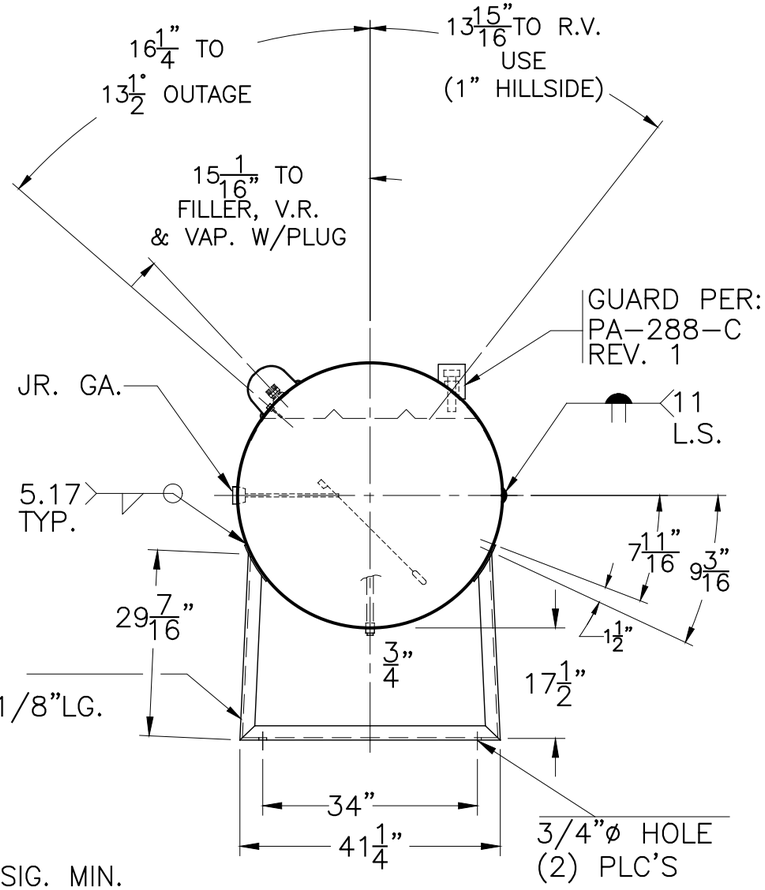

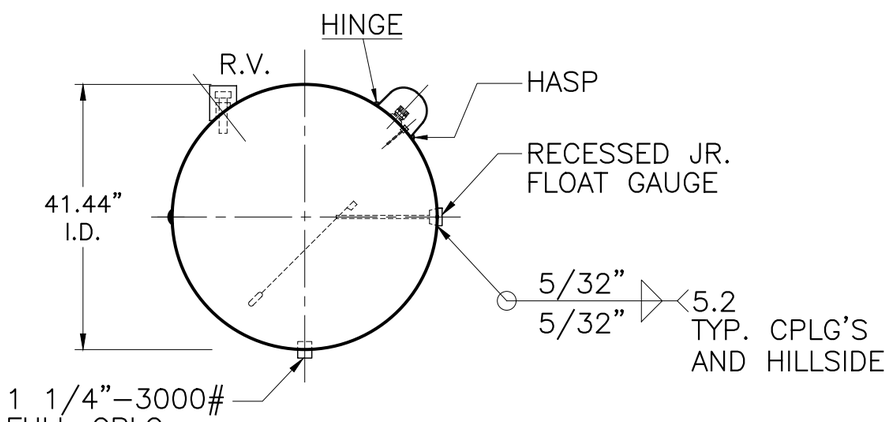

VIEW W/O SUPT"S

NOTE: 1) HYDRO @ 325 PSIG. MIN.

SHELL / HEADS	.245" SA–455 2:1 S.E.
	JOGGLE
	.288" SA–455
M.A.W.P.	250 PSIG. @ 200 °F
M.D.M.T.	–20 °F @ 250 PSIG.
ASME. SECTION VIII	DIV. 1, 2001 ADD. 2003
X–RAY:	RT–4 SPOT L.S. & HDS. G.S.
GALLONS:	575 WT. 1540 LBS.
SERIAL NO.	
N.B.	

PA–496–B REV. 9–2–04 DATE: 7–31–03

FOR: HANSON STANDARD
HORIZ. PROPANE TANK DISPENSER
CFM REQ. = 2407
SURFACE AREA = 103.2 SQ. FT.

INSIDE: UNPAINTED & DEHYDRATE

OUTSIDE: PRIME

BY: J.G.

ROY E. HANSON JR. MFG.
1924 COMPTON AVE.
LOS ANGELES, CA 90011