JOB No.	
DATE:	

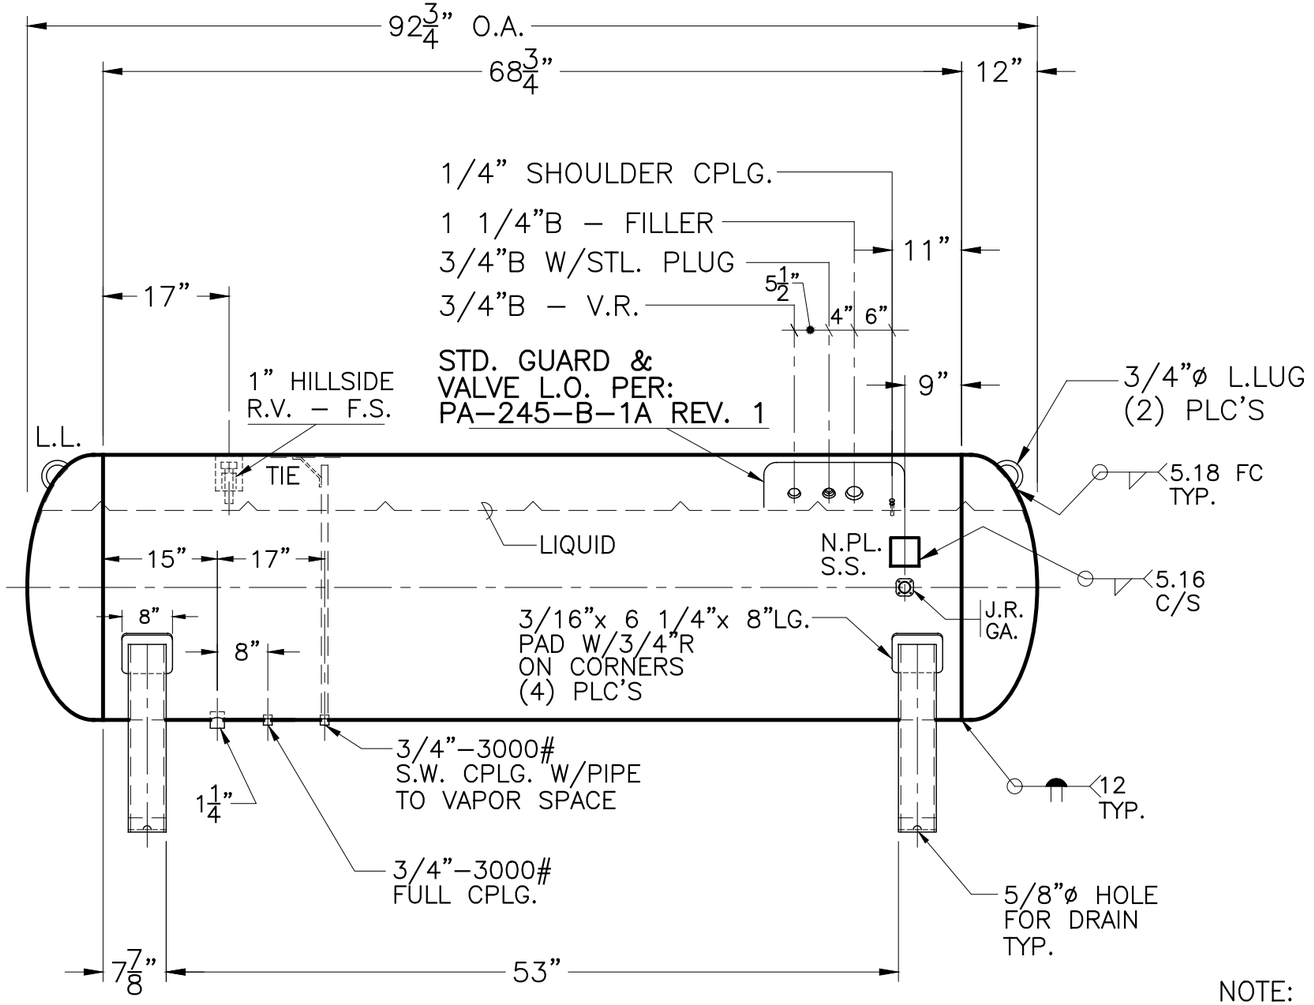

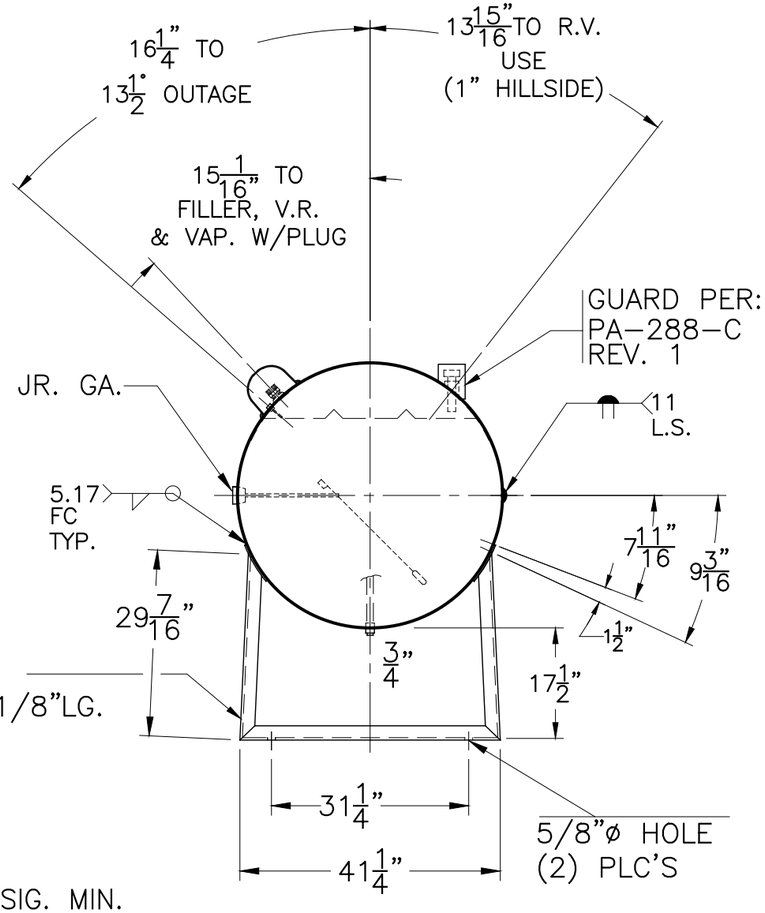

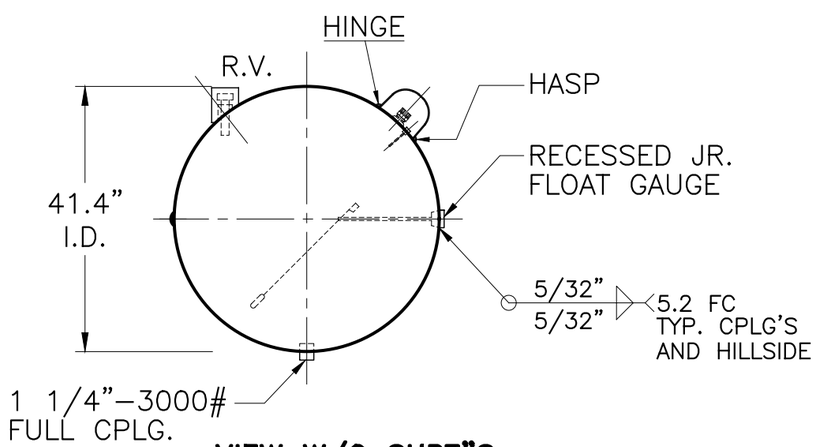

VIEW W/O SUPT"S

NOTE: 1) HYDRO @ 325 PSIG. MIN.

SHELL / HEADS	.250" SA–455 2:1 S.E.
	JOGGLE
	.289" SA–455
M.A.W.P.	250 PSIG. @ 200 °F
M.D.M.T.	–20 °F @ 250 PSIG.
ASME. SECTION VIII	DIV. 1, 2017
X–RAY:	RT–4 SPOT L.S. & HDS. G.S.
GALLONS:	499 WT. 1245 LBS.
SERIAL NO.	
N.B.	

PA–497–B	REV. 5–14–19
	DATE: 7–31–89
FOR: HANSON STANDARD	
HORIZ. PROPANE TANK	
CFM REQ. = 2206.3	
SURFACE AREA = 93.0 SQ. FT.	
INSIDE: UNPAINTED & DEHYDRATE	
OUTSIDE: PRIME	
BY: J.G./B.C.	SCALE: 1/2"=12"

ROY E. HANSON JR. MFG.
LOS ANGELES, CA 90021