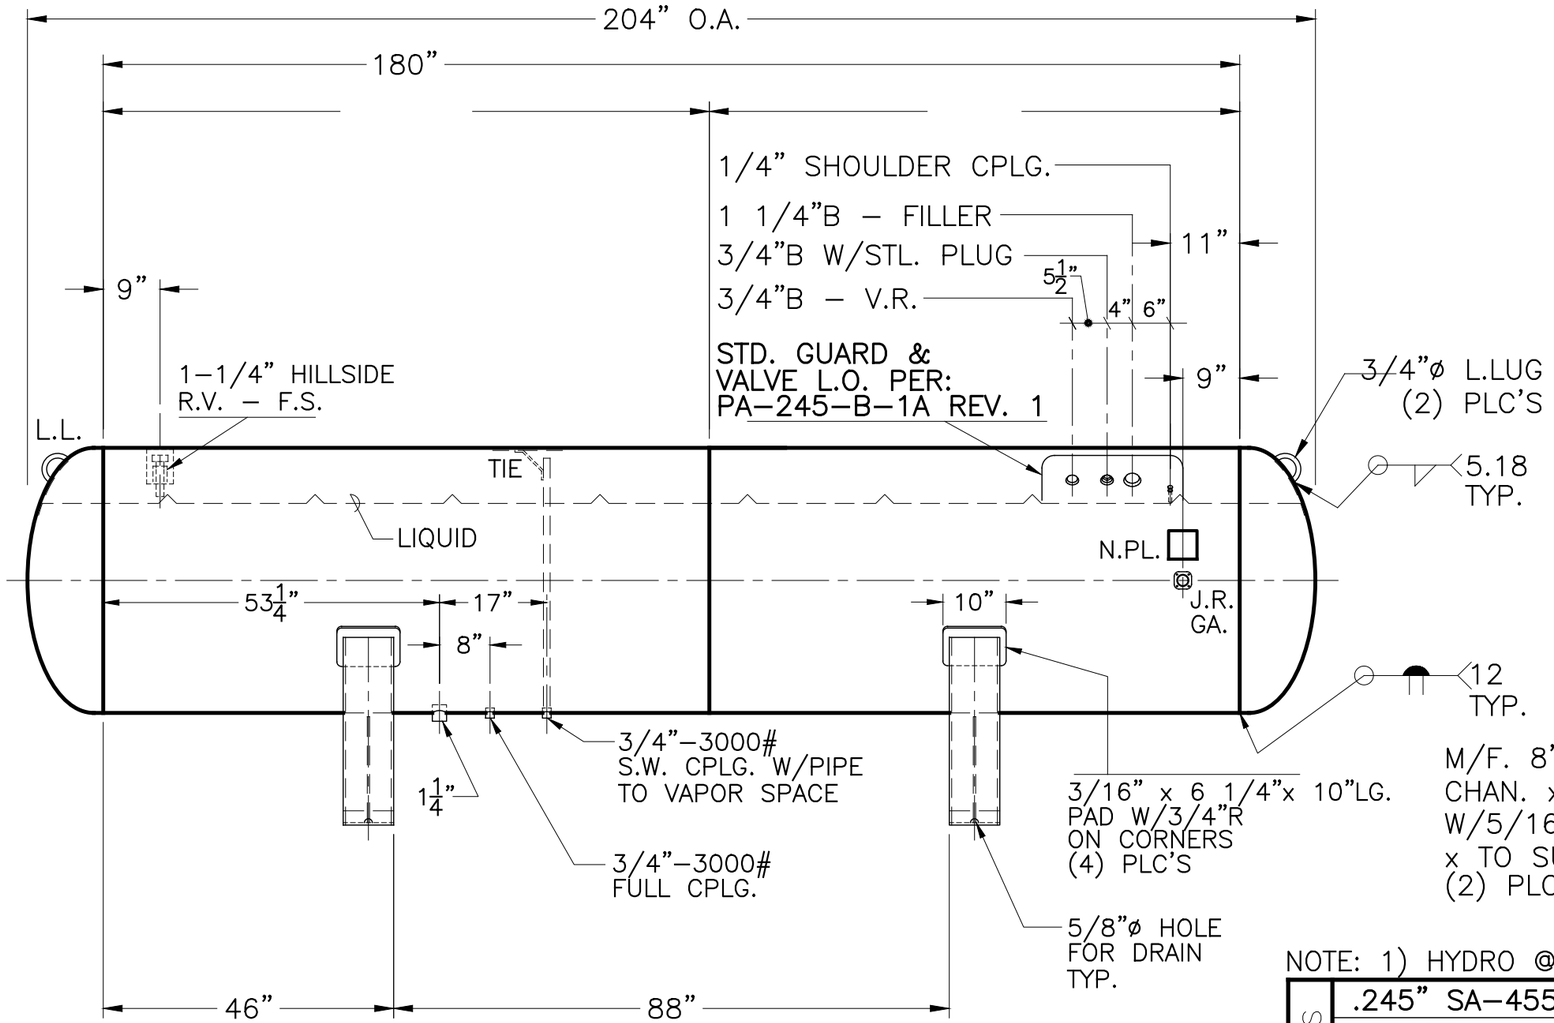

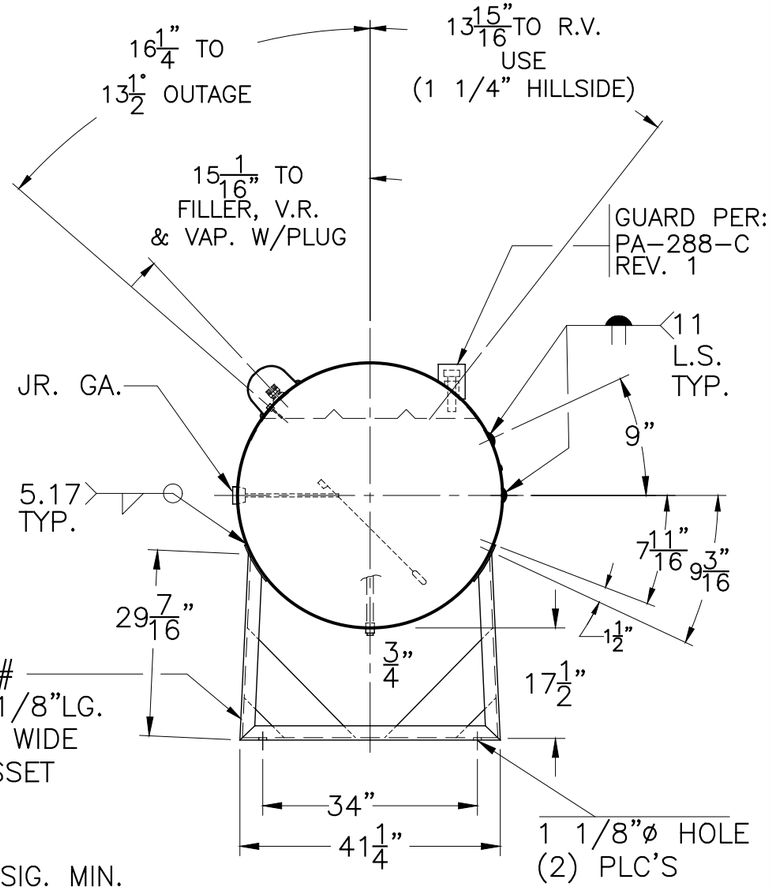

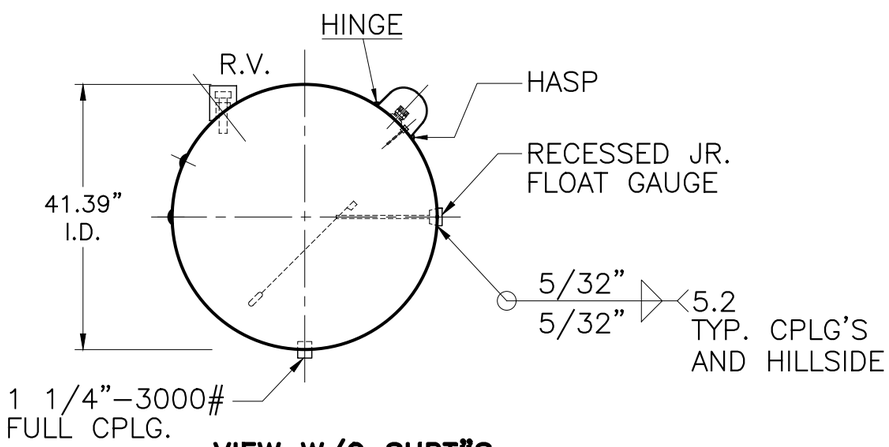

VIEW W/O SUPT"S

NOTE: 1) HYDRO @ 327 PSIG. MIN.

SHELL / HEADS	.245" SA–455 2:1 S.E.
	JOGGLE
	.289" SA–455
M.A.W.P.	250 PSIG. @ 200 °F
M.D.M.T.	–20 °F @ 250 PSIG.
ASME. SECTION VIII	DIV. 1, 2004 ADD. 2005
X–RAY:	RT–4 SPOT L.S. & HDS. G.S.
GALLONS:	1150 WT. 2790 LBS.
SERIAL NO.	
N.B.	

PA–514–B

REV. 8–23–06
DATE: 1–2–90

FOR: HANSON STANDARD
HORIZ. PROPANE TANK DISPENSER
CFM REQ. = 4033
SURFACE AREA = 194.1 SQ. FT.

INSIDE: UNPAINTED & DEHYDRATE

OUTSIDE: PRIME

BY: J.G. SCALE: 1/2"=12"

ROY E. HANSON JR. MFG.
1600 E. WASHINGTON BLVD.
LOS ANGELES, CA 90021