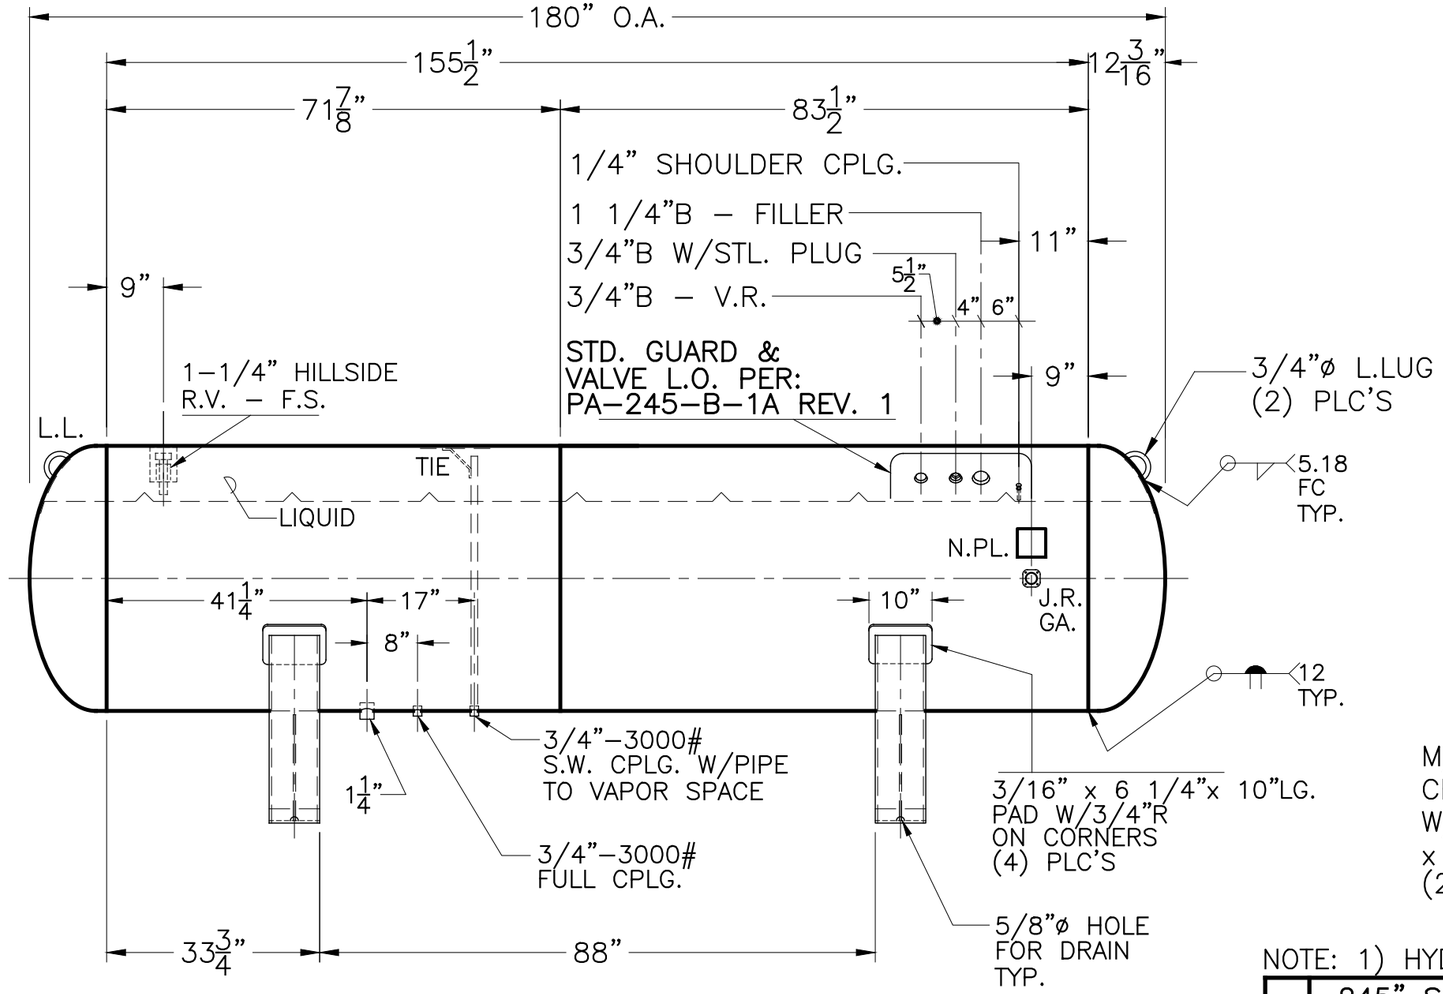

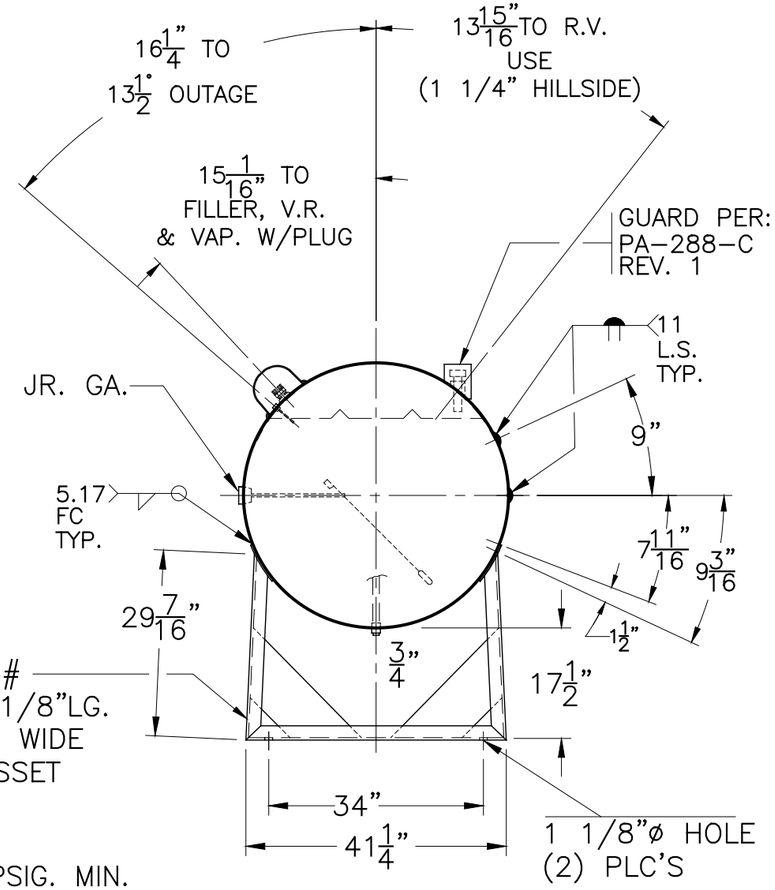

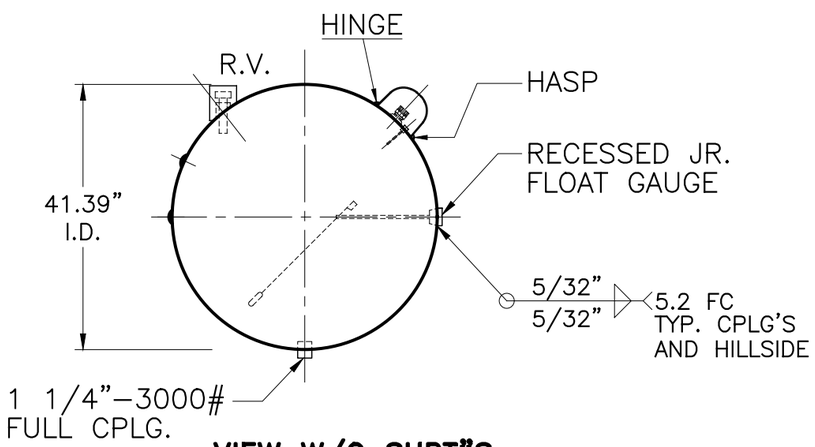

VIEW W/O SUPT"S

NOTE: 1) HYDRO @ 325 PSIG. MIN.

SHELL / HEADS	.245" SA–455 2:1 S.E.
	JOGGLE – .289" OFFSET
	.289" SA–455
M.A.W.P.	250 PSIG. @ 200 °F
M.D.M.T.	–20 °F @ 250 PSIG.
ASME. SECTION VIII	DIV. 1, 2010 ADD. 2010
X–RAY:	RT–4 SPOT L.S. & HDS. G.S.
GALLONS:	1000 WT. 2329 LBS.
SERIAL NO.	
N.B.	

PA–515–B	REV. 7–27–11
	DATE: 1–2–90
FOR: HANSON STANDARD	
HORIZ. PROPANE TANK DISPENSER	
CFM REQ. = 3654	
SURFACE AREA = 172.1 SQ. FT.	
INSIDE: UNPAINTED & DEHYDRATE	
OUTSIDE: PRIME & WHITE	
BY: J.G.	SCALE: 1/2"=12"

ROY E. HANSON JR. MFG.
1600 E. WASHINGTON BLVD.
LOS ANGELES, CA 90021