JOB No.	
DATE:	

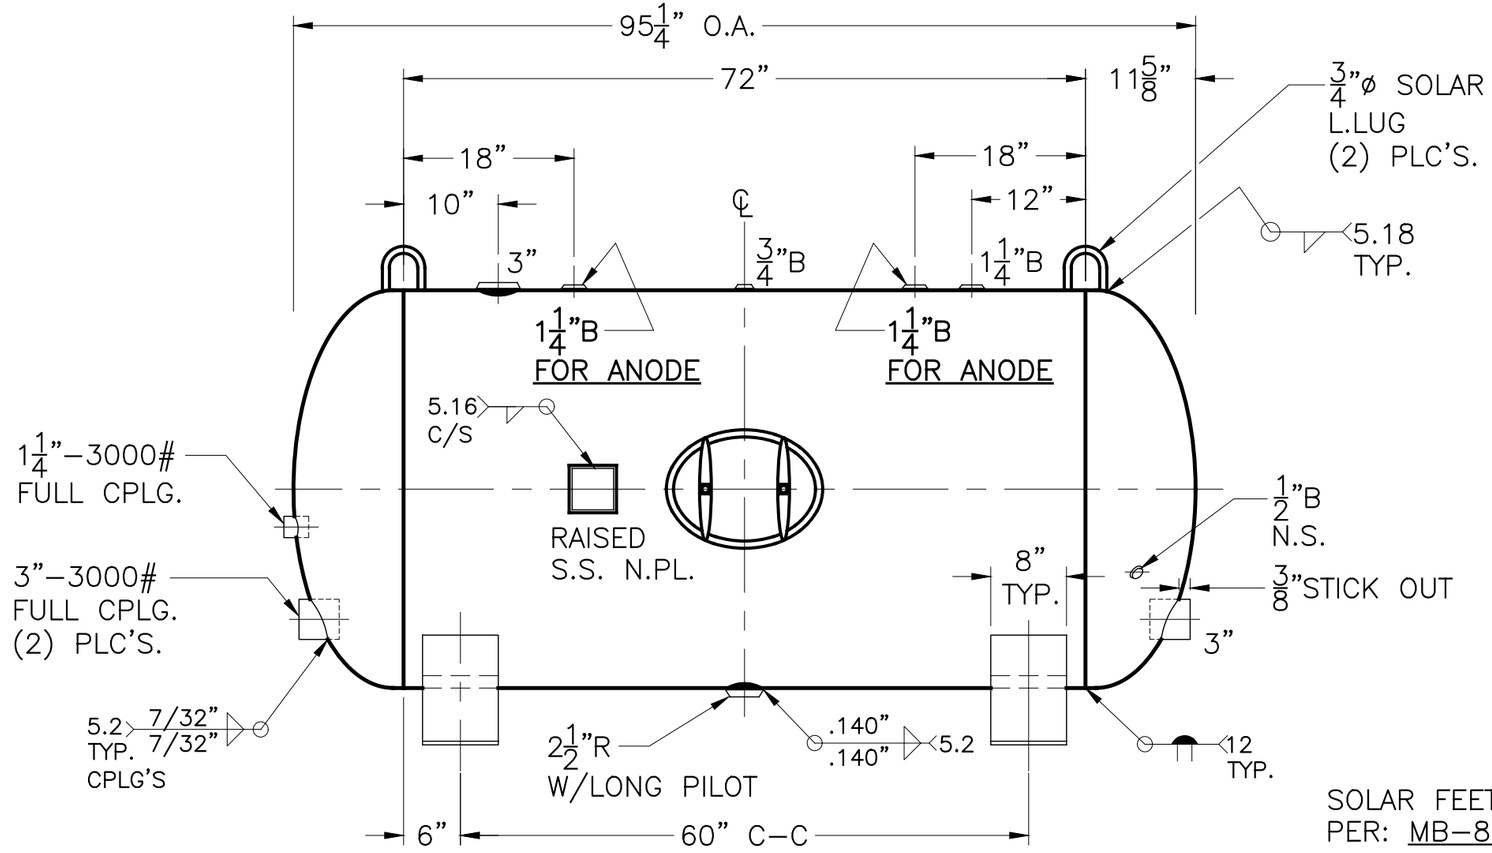

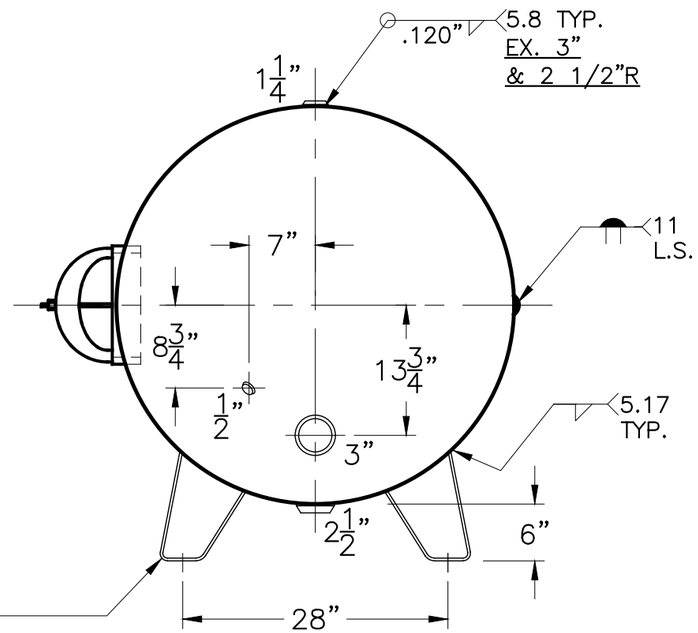

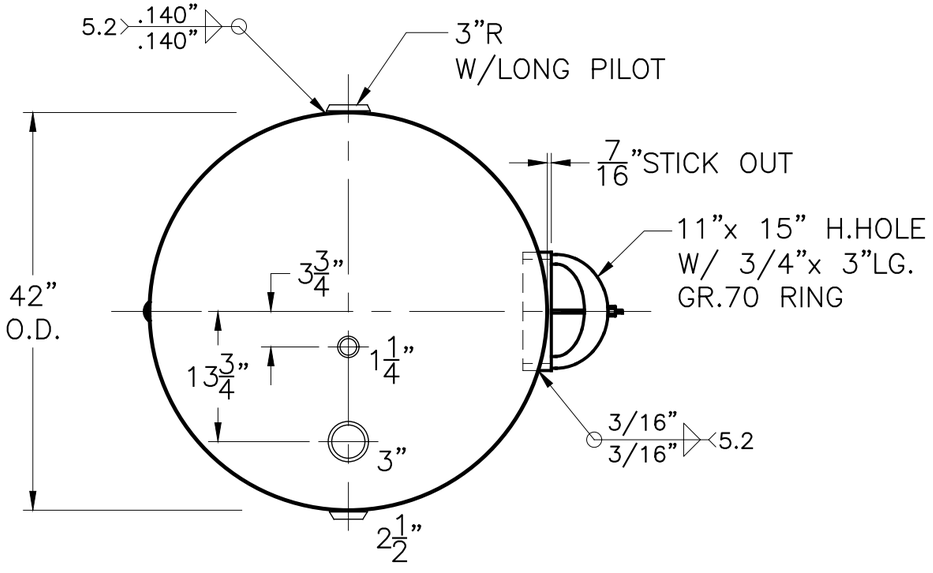

END VIEW W/O SUPPORTS

3) 3–19–09 PROOF TEST.
2) HYDRO @ 225 PSIG. MIN. TO 235 PSIG. MAX.
NOTE: 1) SHIP LOOSE (2) 1 5/16"x 36"LG. FLEX. MAG. ANODES.

SHELL / HEADS	.205" SA–414–G 2:1 S.E.
	JOGGLED
	.175" SA–414–G
M.A.W.P. 150 PSIG. @ 210 °F	
ASME SECTION Ⅷ 2023	
X–RAY: RT–NO / H.L.W.	
GALLONS: 520	WT. 990 LBS.
SERIAL NO.	
N.B.	

HG–520–B	REV. 4–29–24
	DATE: 4–30–18
FOR: HANSON STANDARD	
HORIZ. HOT WATER TANK	
SURFACE AREA = 94.6 SQ. FT.	
INSIDE: GLASS LINED	
(5 MILS MIN.)	
OUTSIDE: S.BLAST AND PRIME	
BY: J.G.	SCALE: 3/4"=12"

ROY E. HANSON JR. MFG.
LOS ANGELES, CA 90011