JOB No.	
DATE:	

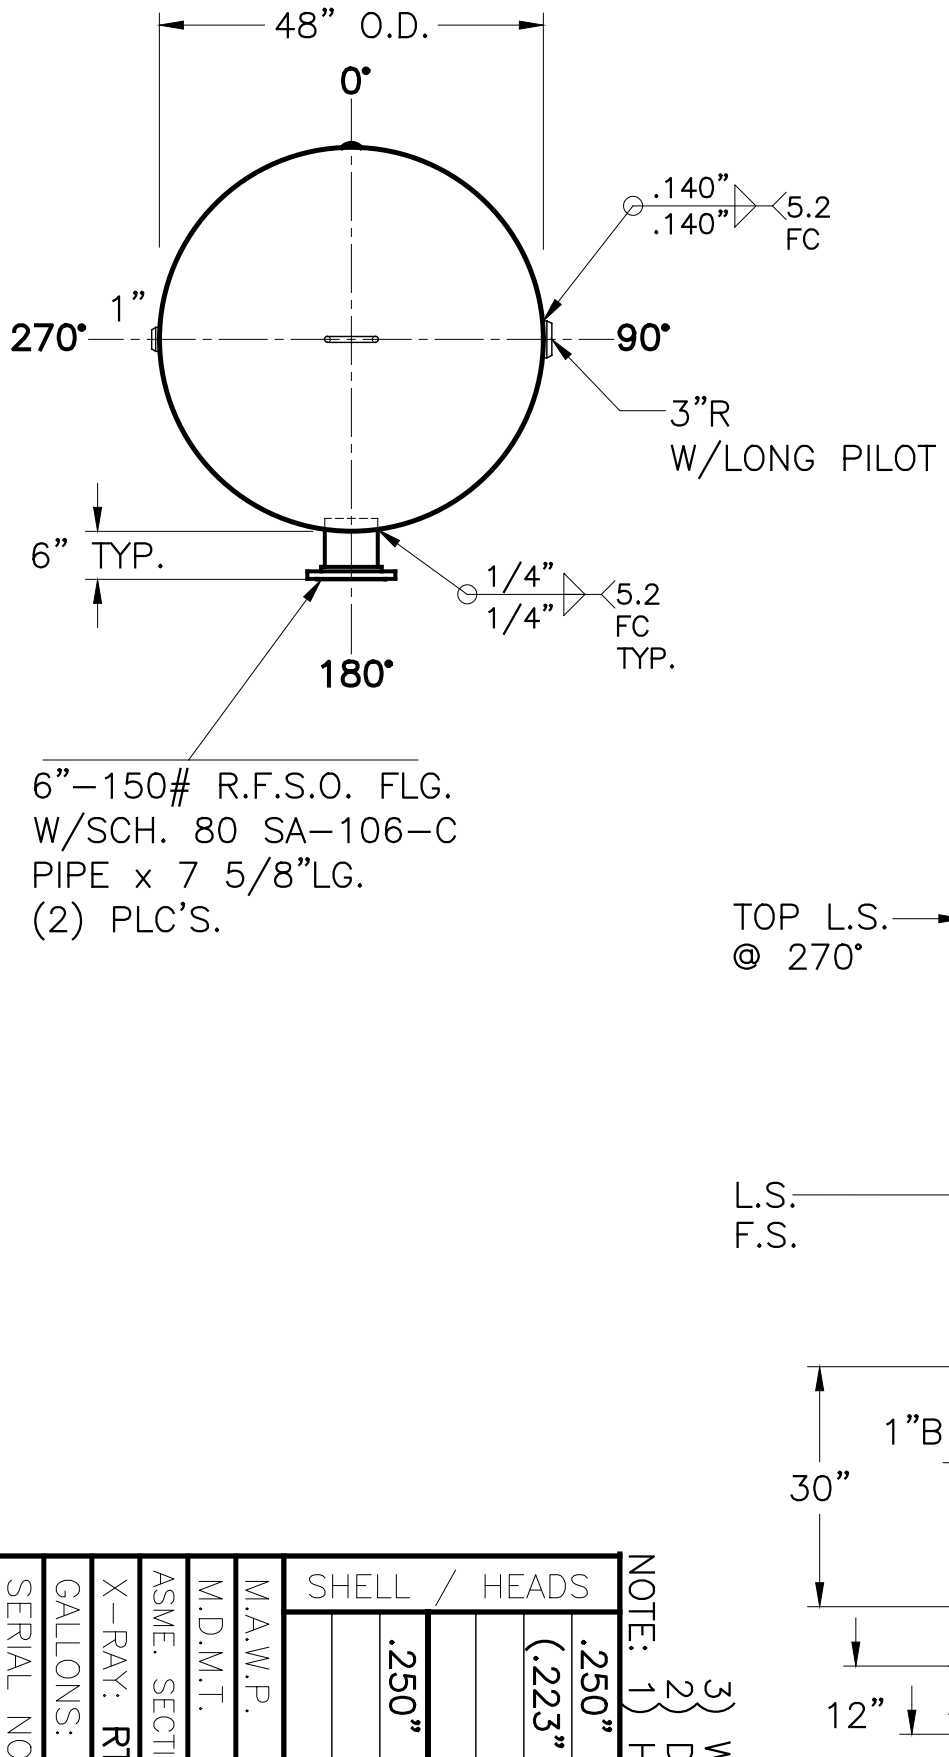

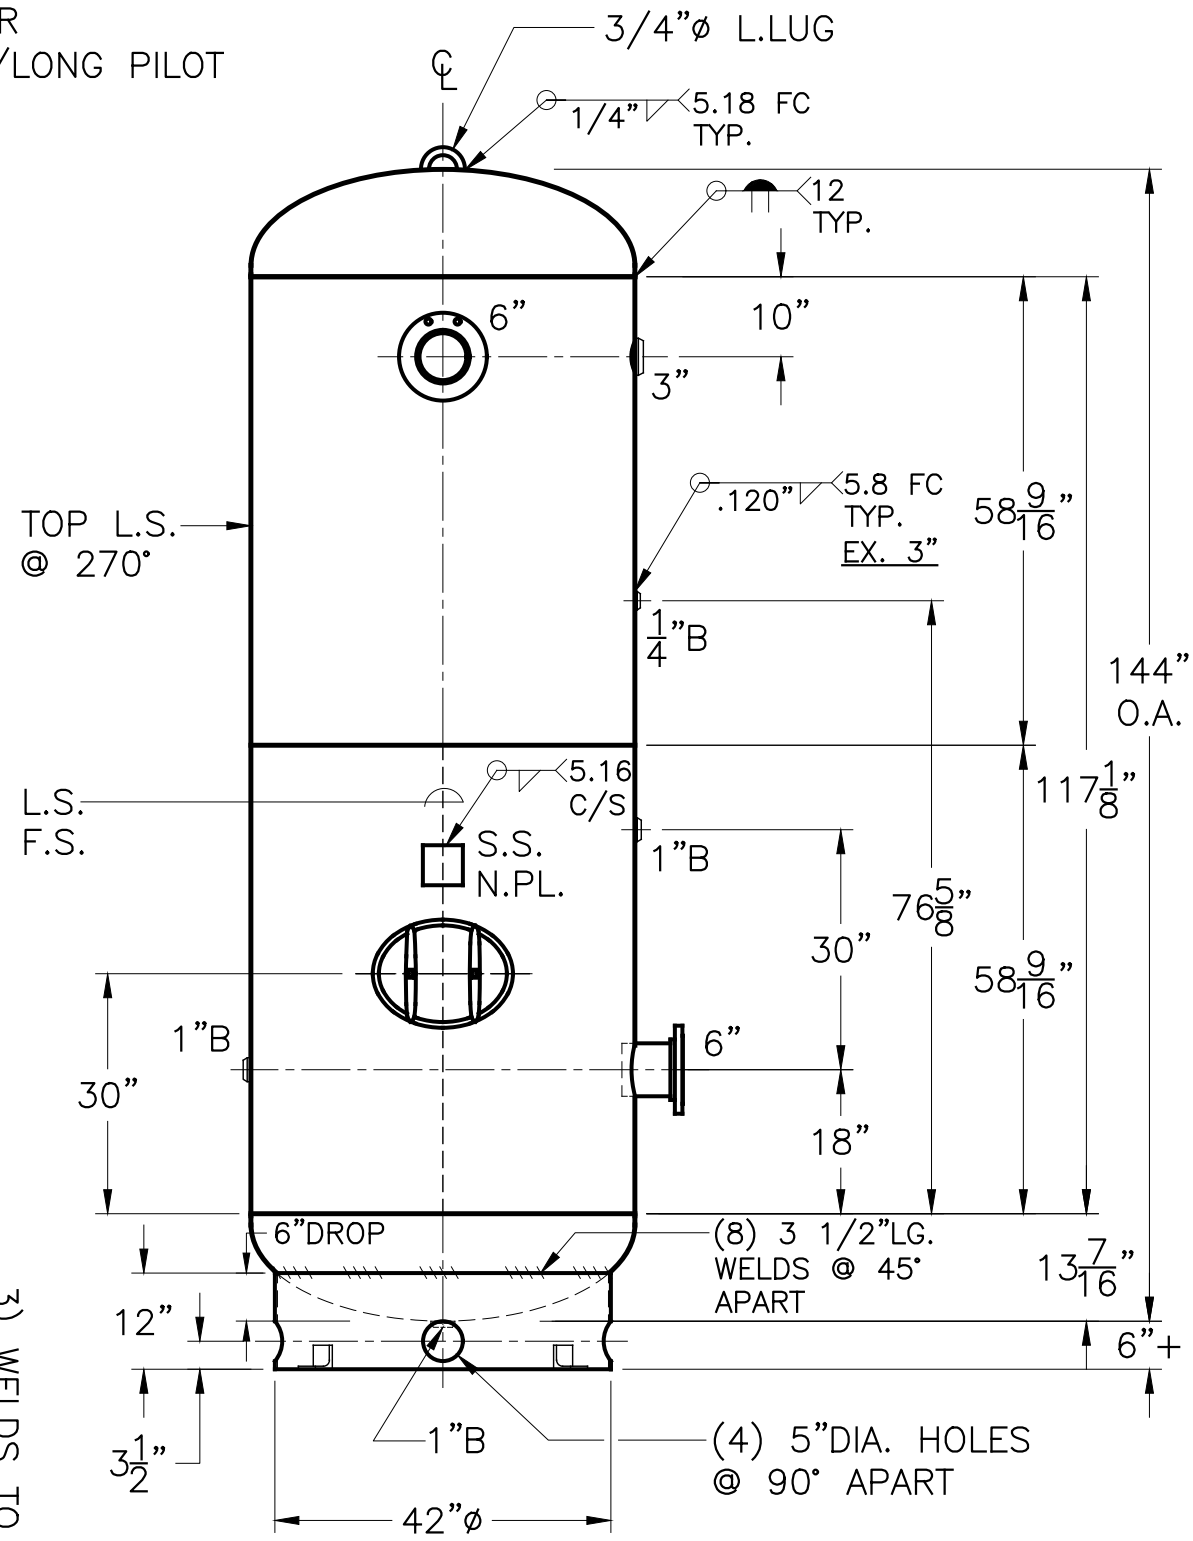

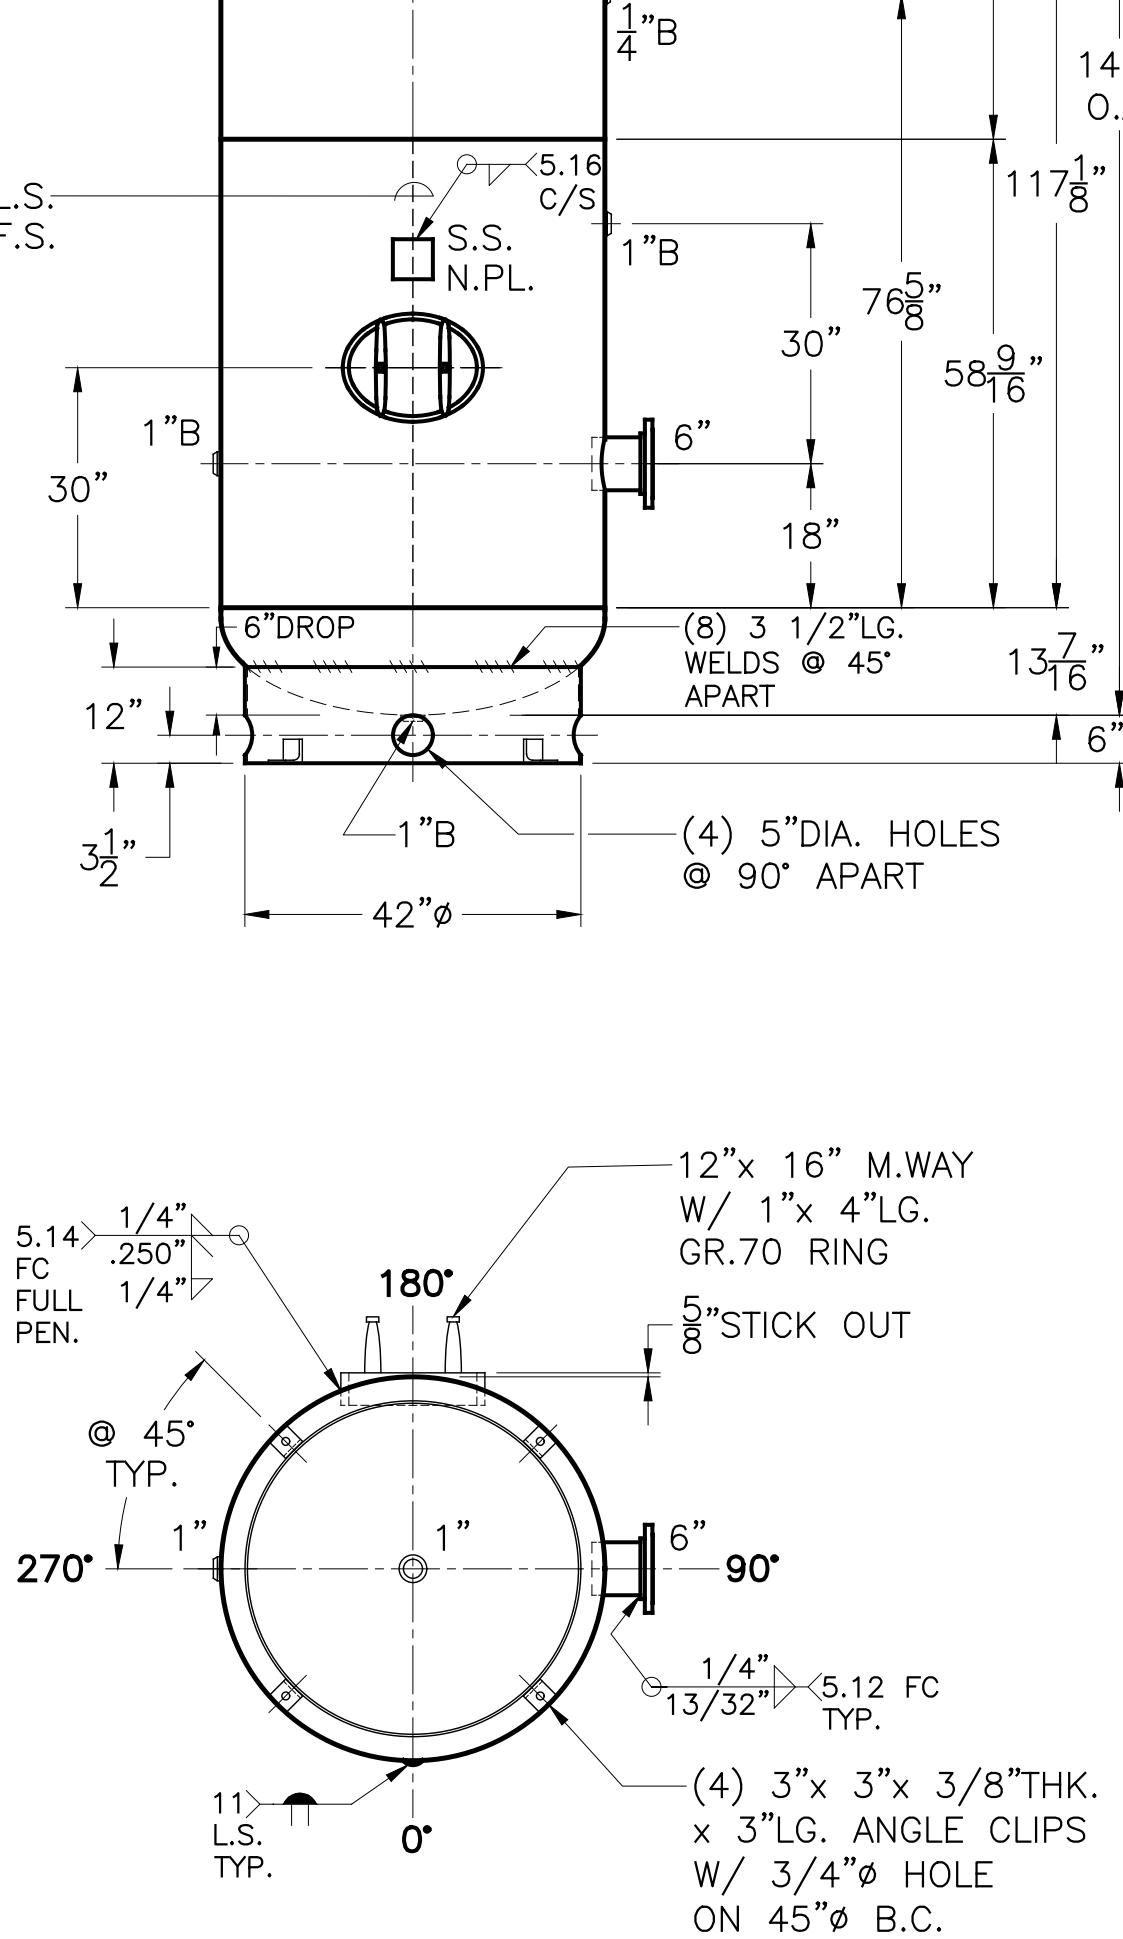

NOTE: 1) HYDRO @ 260 PSIG. MIN.
2) DRAIN FOR HORIZONTAL MOUNT ADDED AFTER SERIAL #423,136
3) WELDS TO, OR JOINING SA–612 HAVE W.P.S. W/SUFFIX "B"

SHELL / HEADS	.250" SA–455 2:1 S.E.
	(.223" MIN.) JOGGLE
	.250" SA–612
M.A.W.P. 200 PSIG. @ 400 °F	
M.D.M.T. –20 °F @ 200 PSIG.	
ASME. SECTION VIII DIV. 1, 2021	
X–RAY: RT–4 SPOT L.S. & HDS. G.S.	
GALLONS: 1060	WT. 2080 LBS.
SERIAL NO.	
N.B.	

48–VA–1060–R REV. 2–1–23 DATE: 10–27–98

FOR: HANSON STANDARD

VERT. AIR TANK

SURFACE AREA = 160.4 SQ. FT.

UW–21(b)

INSIDE: UNPAINTED

OUTSIDE: PRIME

CAD "B" SIZE UNDER "STD"–SERIES

BY: J.G. SCALE: 1/2"=12"

ROY E. HANSON JR. MFG.

LOS ANGELES, CA 90021