JOB No.

DATE:

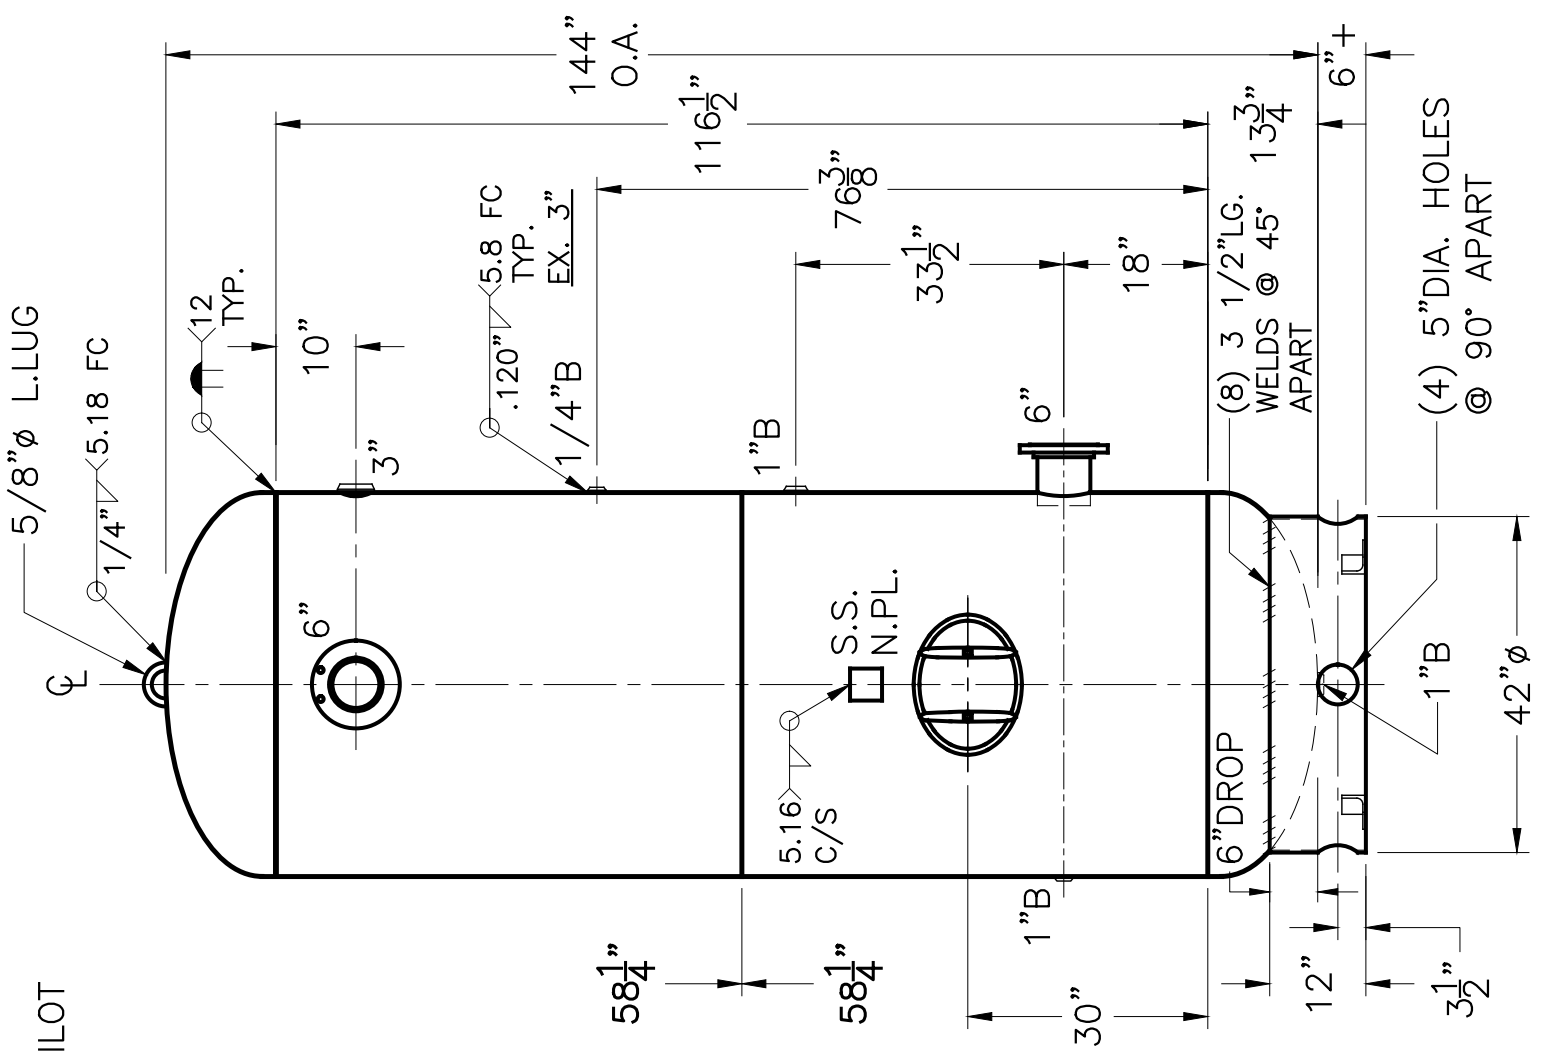

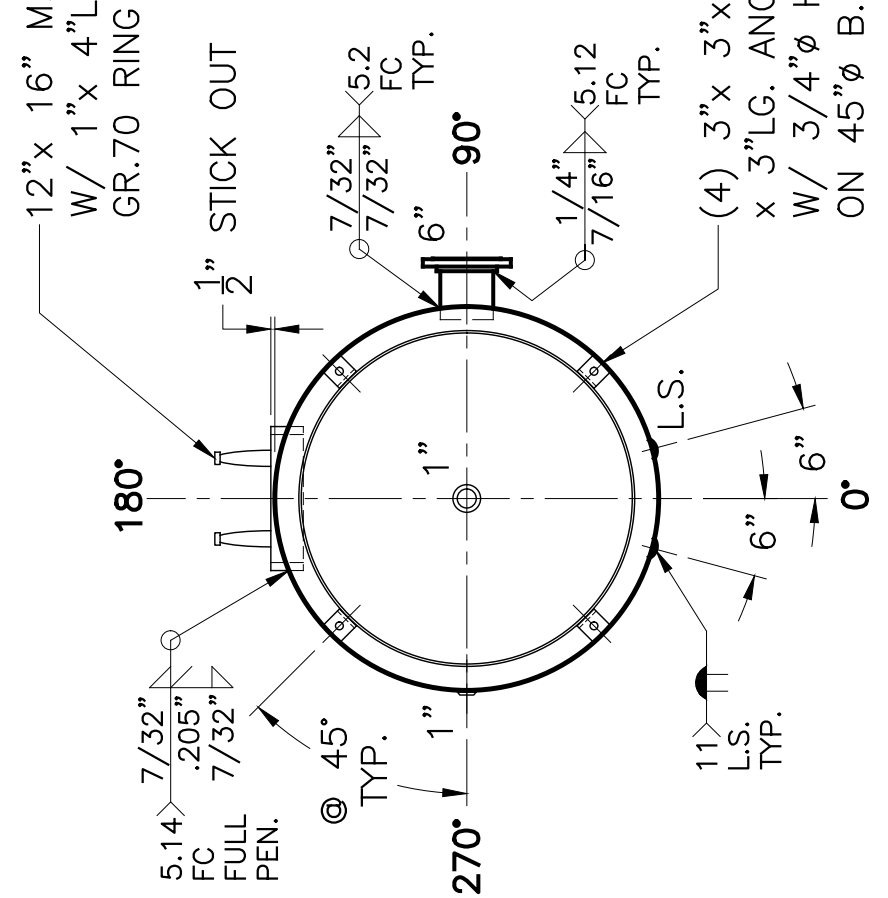

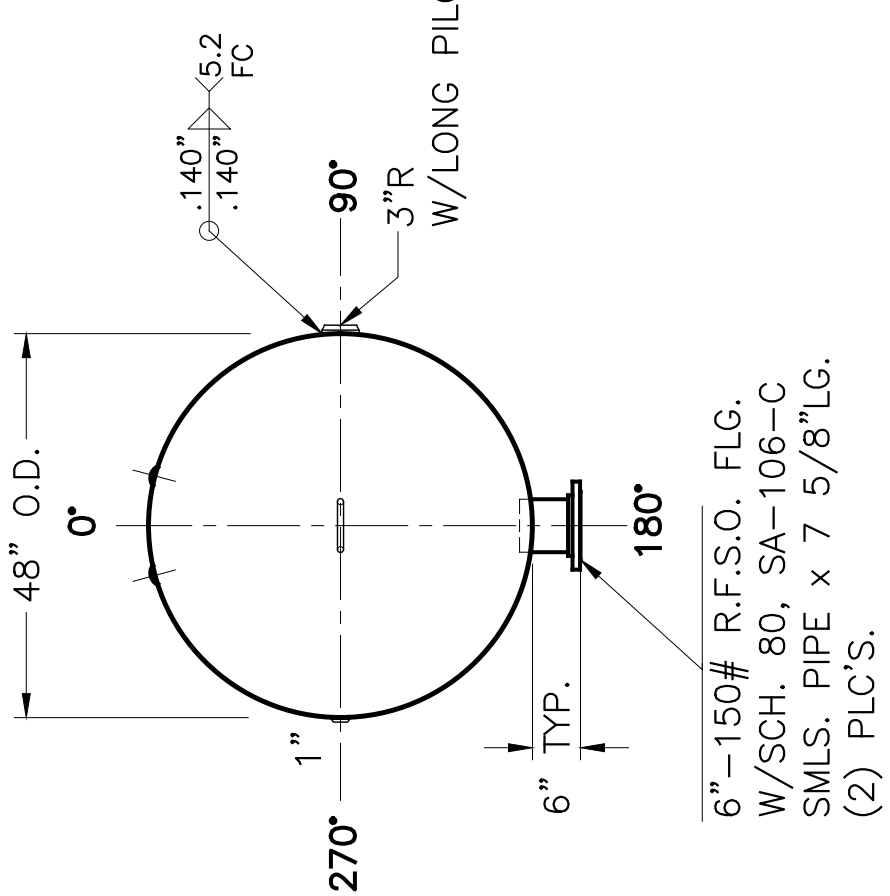

3) DRAIN FOR HORIZONTAL MOUNT ADDED AFTER SERIAL #423,136
2) IMPACT TESTING NOT REQUIRED. UG–20(f)
NOTE: 1) HYDRO @ 195 PSIG. MIN.

SHELL / HEADS	.250" SA–455 2:1 S.E.				
	JOGGLE				
	.205" SA–414–G				
M.A.W.P.	150	PSIG. @	400	°F	
M.D.M.T.	–20 °F @		150	PSIG.	
ASME. SECTION VIII DIV. 1, 2023					
X–RAY:	RT–4 SPOT L.S. ONLY				
GALLONS:	1060	WT.	1732	LBS.	
SERIAL NO.					
N.B.					

48–VP–1060–R	REV. 2–26–25
	DATE: 3–6–12
FOR: HANSON STANDARD	
VERT. AIR TANK	
SURFACE AREA = 160.4 SQ. FT.	
UW–21(b)	
INSIDE: UNPAINTED	
OUTSIDE: SHOP PRIME	
CAD "B" SIZE UNDER "STD"–SERIES	
BY: J.G.	SCALE: 1/2"=12"

ROY E. HANSON JR. MFG.
LOS ANGELES, CA 90021