JOB No.
DATE:

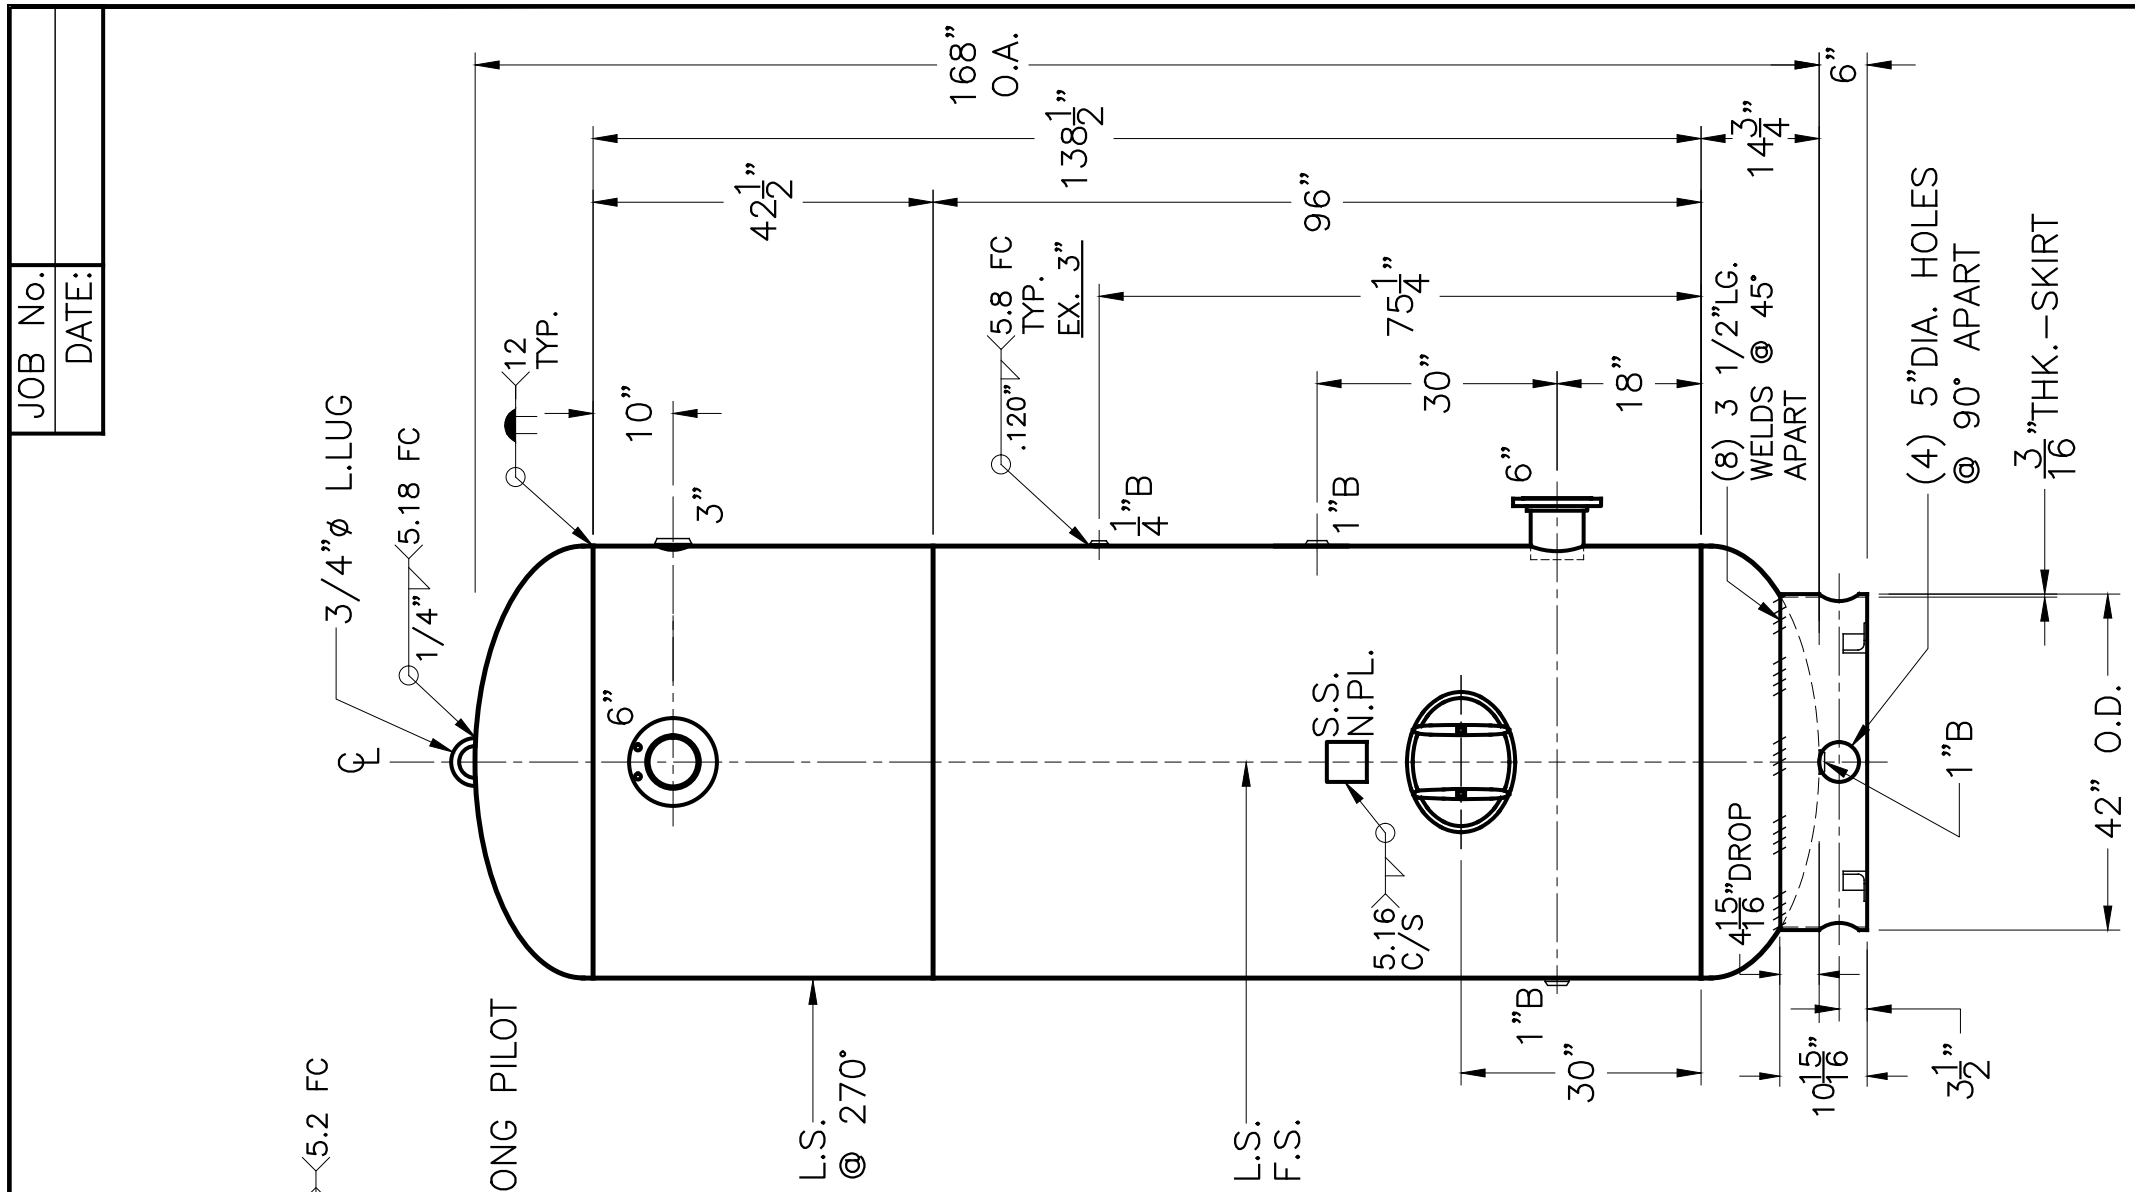

NOTE: 1) HYDRO @ 195 PSIG. MIN.
2) DRAIN FOR HORIZONTAL MOUNT ADDED AFTER SERIAL #423,136

SHELL / HEADS	.250" SA-455 2:1 S.E. (.222" MIN.)
	.230" SA-414-G
M.A.W.P.	150 PSIG. @ 400 °F
M.D.M.T.	-20 °F @ 150 PSIG.
ASME. SECTION VIII DIV. 1, 2023	
X-RAY:	RT-4 SPOT L.S. & HD. G.S.
GALLONS:	1550 WT. 2460 LBS.
SERIAL NO.	
N.B.	

54-VP-1550-R	REV. 10-23-24 / DATE: 8-12-92
FOR:	HANSON STANDARD
	VERT. AIR TANK
	UW-21(b)
INSIDE:	UNPAINTED
OUTSIDE:	PRIME
	CAD "B" SIZE UNDER "STD"-SERIES
BY: J.G.	SCALE: 1/2"=12"

ROY E. HANSON JR. MFG.
LOS ANGELES, CA 90021