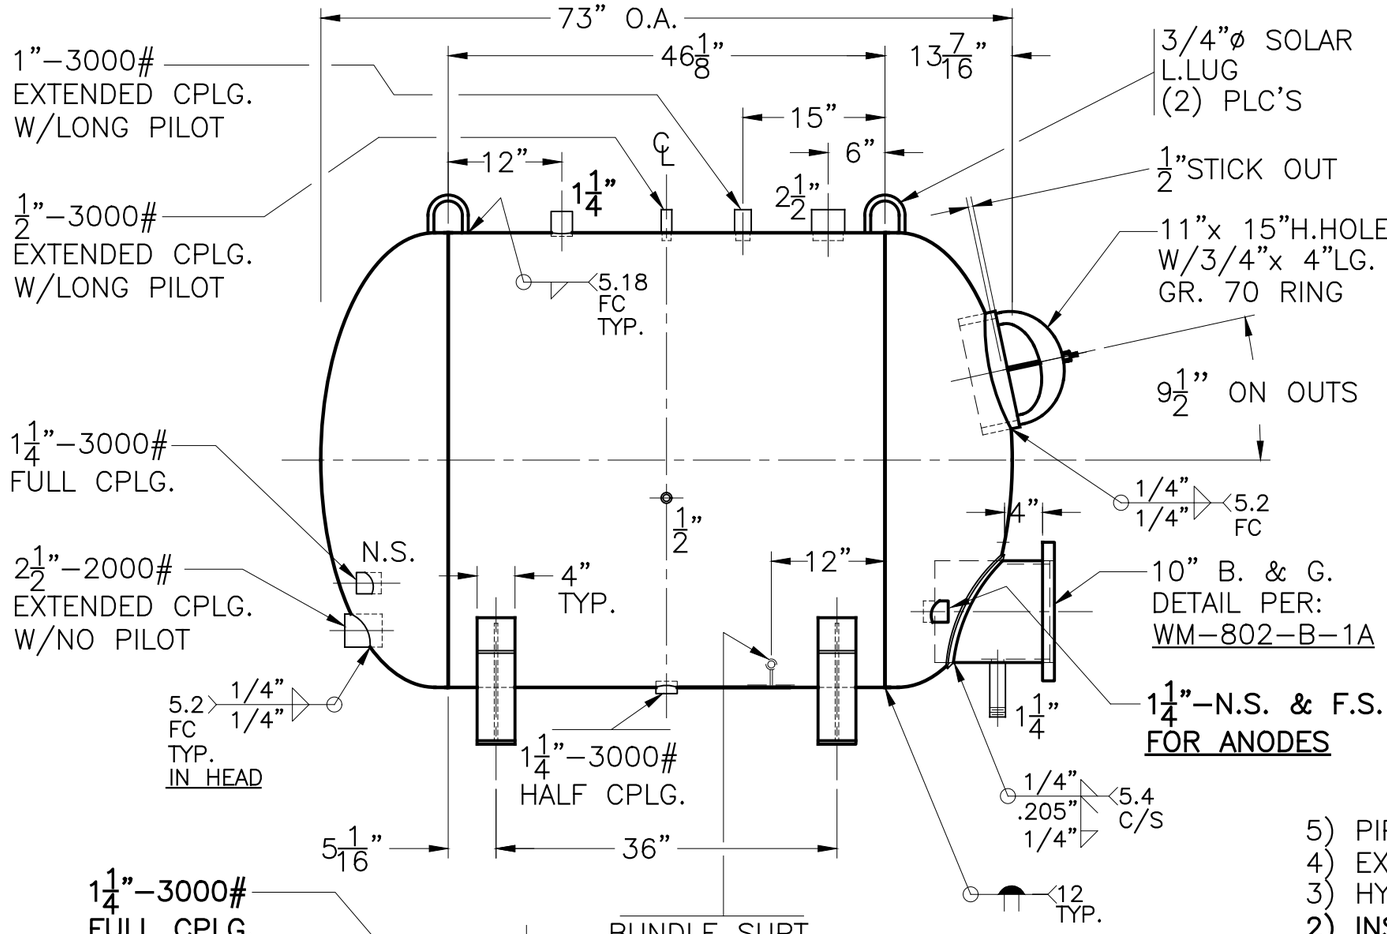

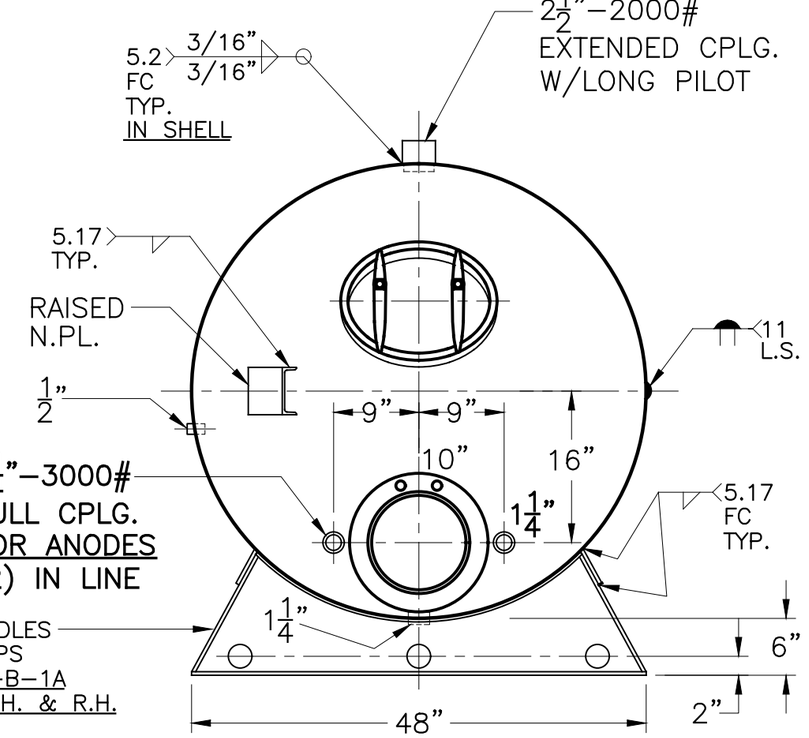

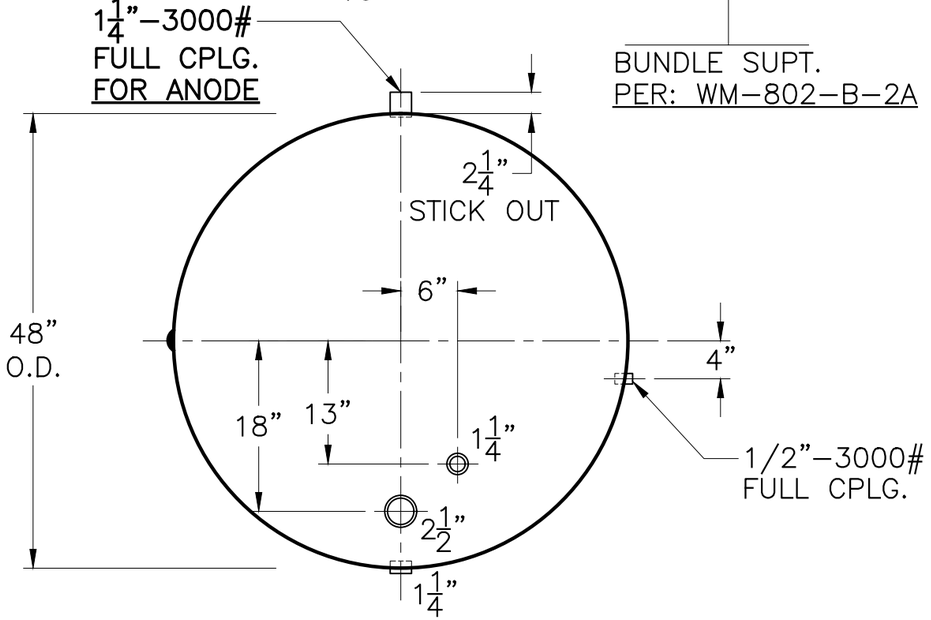

VIEW W/OUT SUPPORTS

5) PIPES SA–312–304 ERW S.S.
4) EXTEND ALL CPLG'S 5/8" MIN. INSIDE.
3) HYDRO @ 188 PSIG. MIN. TO 197 PSIG. MAX.
2) INSTALL (3) 1 5/16" x 30" RIGID MAG. ANODES, BEFORE FG & MJ.
NOTE: 1) SEAL ALL OPENINGS TO KEEP CEMENT MOIST TO PREVENT CRACKING.

SHELL / HEADS	
	.250" SA–414–G 2:1 S.E.
	JOGGLE
	.200" SA–455

M.A.W.P. 125 PSIG. @ 210 °F

ASME. SECTION IV 2007 ADD 2008

X–RAY: RT–NO/H.L.W.

GALLONS: 500 WT. 1812 LBS.

SERIAL NO.

N.B.

WM–802–B REV.

DATE: 9–10–09

FOR: HORIZ. HOT WATER TANK

86.1 SQ. FT. SURFACE AREA.

THIS TANK IS SHIPPED WITH ALL OPENINGS SEALED. THE CEMENT LINING MUST BE KEPT MOIST BEFORE, DURING, AND AFTER INSTALLATION TO PREVENT CRACKING OF THE CEMENT.

INSIDE: CEMENT LINED

OUTSIDE: PRIME AND 2" FIBERGLASS WITH ALUMINUM JACKET

BY: J.G./C.J. SCALE: 3/4"=12"

ROY E. HANSON JR. MFG.
1600 E. WASHINGTON BLVD.
LOS ANGELES, CA 90021