| JOB No. | |
|---|---|
| DATE: | |

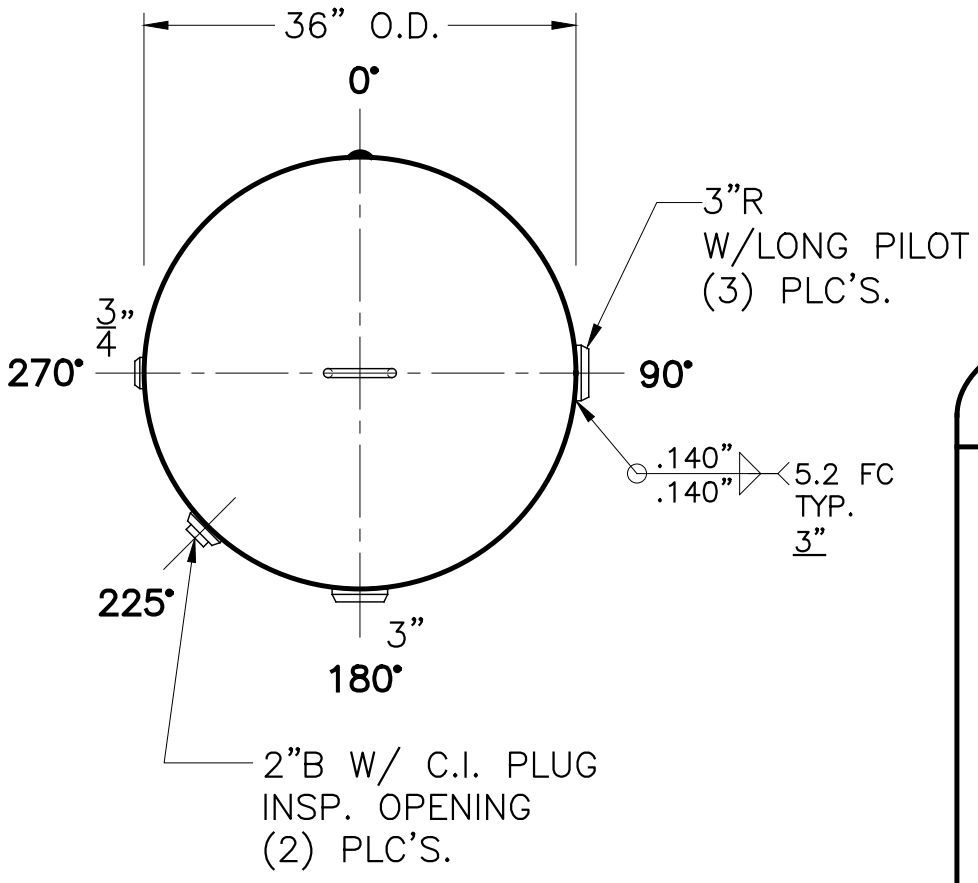


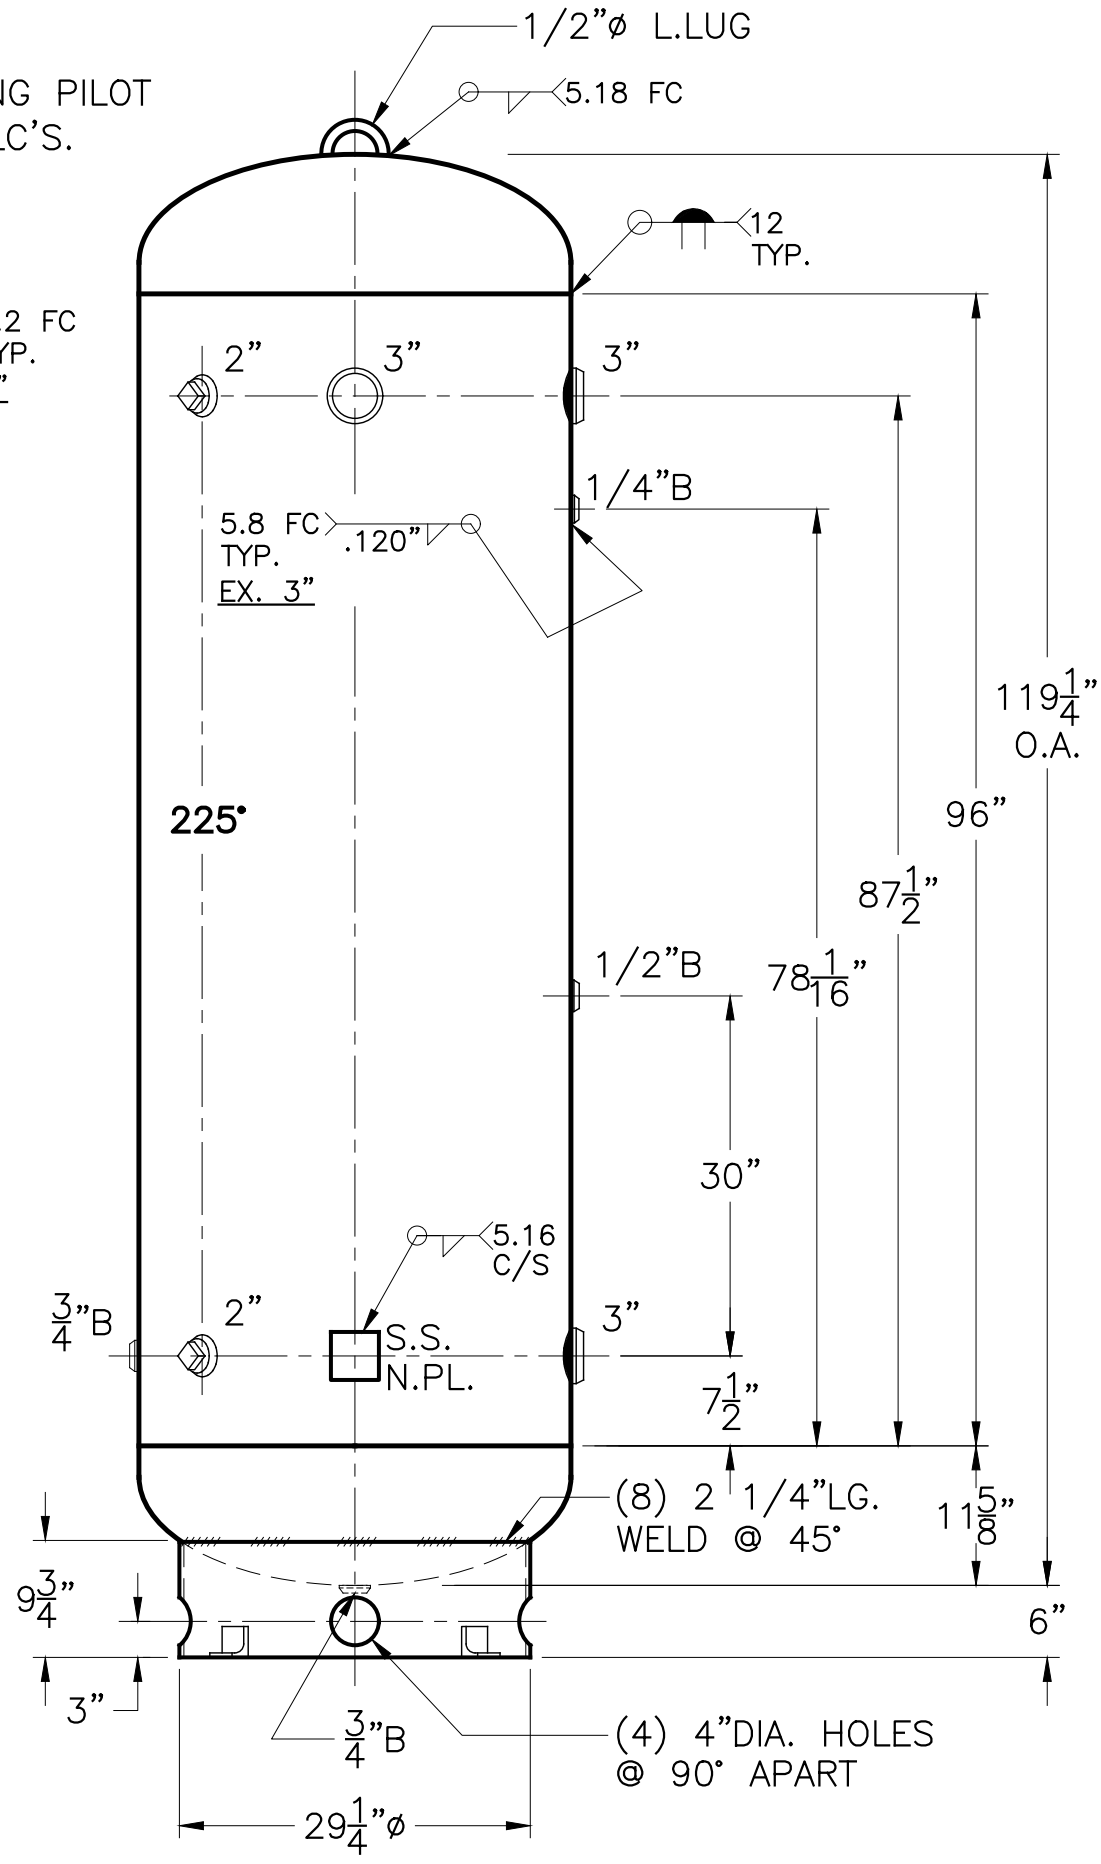


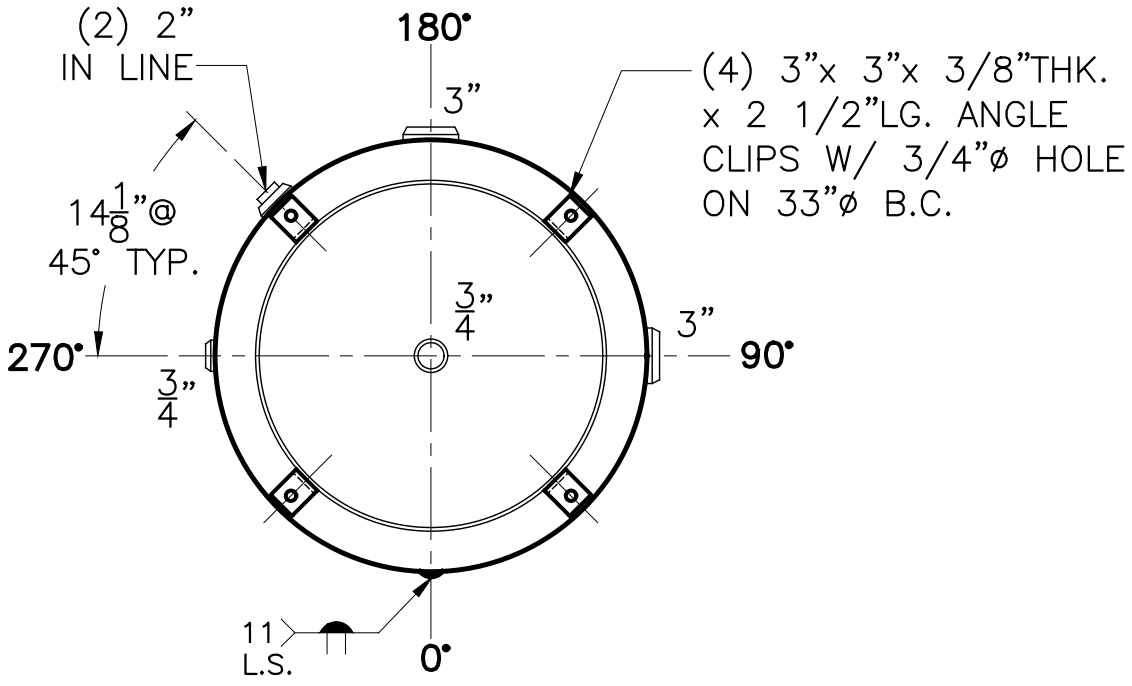


NOTE: 1) HYDRO @ 260 PSIG. MIN.
2) DRAIN FOR HORIZONTAL MOUNT ADDED AFTER SERIAL #423,136

| SHELL / HEADS | | |
|---|---|---|
| .218" SA-455 2:1 S.E. | .205" SA-455 | |
| (.196" MIN.) - JOGGLE | (.199" MIN.) | |

| | | | |
|---|---|---|---|
| M.A.W.P. 200 PSIG. @ 400 °F | | | |
| M.D.M.T. -20 °F @ 200 PSIG. | | | |
| ASME. SECTION VIII DIV. 1, 2017 | | | |
| X-RAY: RT-4 SPOT L.S. ONLY | | | |
| GALLONS: 500 | WT. 936 LBS. | | |
| SERIAL NO. | | | |
| N.B. | | | |

| | | |
|---|---|---|
| **36-VA-500-R** | REV. 3-6-18 | |
| FOR: HANSON STANDARD | DATE: 4-28-99 | |
| VERT. AIR TANK | | |
| INSIDE: UNPAINTED | | |
| OUTSIDE: PRIME | | |
| CAD "B" SIZE UNDER "STD"-SERIES | SCALE: 3/4"=12" | |
| BY: J.G. | | |

**ROY E. HANSON JR. MFG.**
LOS ANGELES, CA 90021