


(4) 2 1/2" x 2 1/2" x 3/16" THK. x 22 1/16" LG. ANGLE LEG

(4) 4" x 4" x 1/4" THK. PAD W/ 3/4"Ø HOLE FOR 1/2"Ø x 8" LG. BOLTS GRADE 5 OR BETTER 6" EMBEDMENT

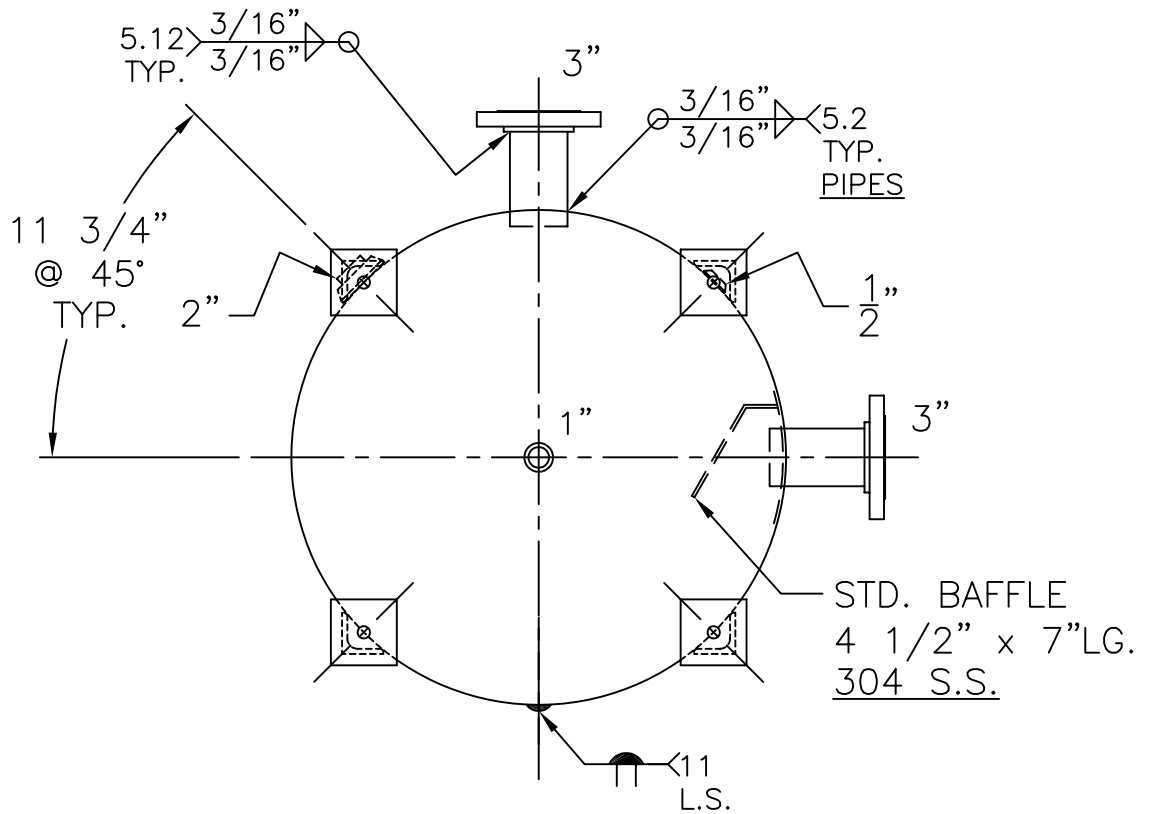

NOTE: 1) HYDRO @ 164 PSIG. MIN.

SHELL / HEADS	.166" SA-414-G 2:1 S.E.
JOGGLE	
	.164" SA-414-G
M.A.W.P.	125 PSIG. @ 250 °F
M.D.M.T.	-20 °F @ 125 PSIG.
ASME SECTION VIII	DIV. 1, 2007 ADD 2007
X-RAY:	RT-NO
GALLONS:	189 WT. 394 LBS.
SERIAL NO.	
N.B.	

FOR:	WK-378-B	REV. 6-17-08
	VERTICAL BUFFER TANK	DATE: 10-28-03
INSIDE:	UNPAINTED	
OUTSIDE:	PRIME	
LEG-ZONE	4-15 KM.	
BY: E.S.	SCALE: 1" = 12"	
ROY E. HANSON JR. MFG.		
1600 E. WASHINGTON BLVD.		
LOS ANGELES, CA 90021		